

#### BURNS CITY COUNCIL SPECIAL MEETING

February 7, 2024, at 6:00 p.m. 242 S. Broadway Burns, Oregon 97720

THE BURNS CITY COUNCIL WILL HOLD A SPECIAL MEETING ON WEDNESDAY, FEBRUARY 7, 2024, AT 6:00 P.M. AT THE BURNS CITY COUNCIL CHAMBERS, 242 S. BROADWAY, BURNS, OREGON, 97720.

#### **AGENDA**

- I. Call to Order
- II. Pledge of Allegiance
- III. Establish Quorum (Roll Call)
- IV. Items of Discussion
  - Ordinance No. 24-891 An Emergency Ordinance approving the adoption of new FEMA
    Flood Insurance Rate Maps and an amendment to the Flood Hazard Regulations of the City
    of Burns Zoning Ordinance.

#### V. Adjourn

The meeting location is accessible to persons with disabilities. A request for an interpreter for the hearing impaired or for other accommodations for persons with disabilities should be made at least 48 hours before a regular meeting to City Clerk Tiffany Leffler (541-573-5255).

POSTED: THURSDAY, February 1, 2024

LOCATIONS: BURNS CITY HALL, BURNS POST OFFICE, H.C. COURTHOUSE

#### ORDINANCE NO. 24-891

## AN EMERGENCY ORDINANCE APPROVING THE ADOPTION OF NEW FEMA FLOOD INSURANCE RATE MAPS AND AN AMENDMENT TO THE FLOOD HAZARD REGULATIONS OF THE CITY OF BURNS ZONING ORDINANCE

WHEREAS, the Federal Emergency Management Agency (FEMA) has prepared an updated Flood Insurance Study (FIS) and Flood Insurance Rate Maps (FIRMs) for the City of Burns; and

WHEREAS, the new FIS and FIRMs revise and update information on the existence and severity of flood hazards within the City of Burns, and will be used to establish actuarial flood insurance rates and assist the City in its efforts to implement its flood hazard management regulations; and

WHEREAS, the new FIS and FIRMs will take regulatory effect on February 8, 2024; and WHEREAS, the City is a participant in the National Flood Insurance Program (NFIP) and the adoption of the new FIS and FIRMs is necessary for the City to remain in compliance with its obligations under the NFIP; and

WHEREAS, the City desires to maintain its participation in the National Flood Insurance Program (NFIP) as it provides direct economic benefits to the residents of the City of Burns in the form of reduced flood insurance premiums; and

WHEREAS, the FIS and FIRMs aid the City in protecting the health, safety, and general welfare of the public by indicating where flood damages are most likely to occur within the City of Burns, and as such, the City desires to have the effective date of this Ordinance coincide with the effective date set by FEMA for the new FIS and FIRMs; and

WHEREAS, an amendment to the Flood Hazard regulations in Section 18.30.325 of the City of Burns Zoning Ordinance is needed to update the effective date of the new FIS and the new FIRM panel numbers referenced therein; and

WHEREAS, all required notices of the new FIS, FIRMs, and Zoning Ordinance amendment were provided in accordance with State legal requirements; and

WHEREAS, a public hearing was appropriately noticed and duly held before the Planning Commission on January 3, 2024, at which it considered the new FIS, FIRMs, and Zoning Ordinance amendment, and recommended City Council approval thereof; and

WHEREAS, a public hearing was appropriately noticed and duly held before the City Council on January 24, 2024, in accordance with all City requirements for legislative amendments; and

WHEREAS, the proposed amendment to the Flood Hazard regulations of the City's Zoning Ordinance is found to comply with all applicable State laws, administrative rules, and Statewide Planning Goals, and with all applicable local criteria and the City of Burn Comprehensive Plan;

The FEMA Flood Insurance Study Number 41025CV000B, Revised February 8, 2024, and the Flood Insurance Rate Maps dated February 8, 2024, attached at Exhibit "A" are hereby adopted by the City of Burns; and

Section 18.30.325 of the Burns Municipal Code is hereby amended to read as stated in Exhibit "B."

PASSED unanimously by the City Council and signed by me in authentication of its passage on the 7<sup>th</sup> day of February 2024, this Ordinance shall take effect on February 8, 2024.

Jerry Woodfin, Mayor


ATTEST:

Fiffany Leffler, City Clerk



## FLOOD INSURANCE STUDY

#### **VOLUME 1 OF 1**



# HARNEY COUNTY, OREGON

AND INCORPORATED AREAS

COMMUNITY NAME	COMMUNITY NUMBER
BURNS PAIUTE RESERVATION	410281
BURNS, CITY OF	410084
HARNEY COUNTY, UNINCORPORATED AREAS	410083
HINES, CITY OF	410085



#### **REVISED:**

**FEBRUARY 8, 2024** 

FLOOD INSURANCE STUDY NUMBER 41025CV000B Version Number 2.6,5,6

### TABLE OF CONTENTS Volume 1

		Page
SEC	CTION 1.0 - INTRODUCTION	4
1,1	The National Flood Insurance Program	1
1.2	Purpose of this Flood Insurance Study Report	Ś
1.3	Jurisdictions Included in the Flood Insurance Study Project	2
1.4	Considerations for using this Flood Insurance Study Report	2 2 6
SEC	CTION 2.0 FLOODPLAIN MANAGEMENT APPLICATIONS	23
2.1	Floodplain Boundaries	23
2.2	Floodways	29
2.3	Base Flood Elevations	30
2.4	Non-Encroachment Zones	31
2.5	Coastal Flood Hazard Areas	31
	2.5.1 Water Elevations and the Effects of Waves	31
	2.5.2 Floodplain Boundaries and BFEs for Coastal Areas	31
	2.5.3 Coastal High Hazard Areas	31
	2.5.4 Limit of Moderate Wave-Action	31
SEC	TION 3.0 – INSURANCE APPLICATIONS	32
3.1	National Flood Insurance Program Insurance Zones	32
SEC	TION 4.0 AREA STUDIED	32
4.1	Basin Description	32
4.2	Principal Flood Problems	33
4.3	Dams and Other Flood Hazard Reduction Measures	35
4.4	Levee Systems	35
SEC.	TION 5.0 – ENGINEERING METHODS	36
5.1	Hydrologic Analyses	37
5.2	Hydraulic Analyses	40
5.3	Coastal Analyses	53
	5.3.1 Total Stillwater Elevations	53
	5.3.2 Waves	53
	5.3.3 Coastal Erosion	53
5.4	5.3.4 Wave Hazard Analyses Alluvial Fan Analyses	53
4-,	Alluviai Fan Ariaiyses	53
	TION 6.0 – MAPPING METHODS	54
5.1	Vertical and Horizontal Control	54
5.2	Base Map	55
3.3 3.4	Floodplain and Floodway Delineation	58
5.5	Coastal Flood Hazard Mapping FIRM Revisions	74
٠.٠	6.5.1 Letters of Map Amendment	74
	5.5.1 Editors of Map Amendment	74

<ul> <li>6.5.2 Letters of Map Revision Based on Fill</li> <li>6.5.3 Letters of Map Revision</li> <li>6.5.4 Physical Map Revisions</li> <li>6.5.5 Contracted Restudies</li> <li>6.5.6 Community Map History</li> </ul>	74 75 76 76
SECTION 7.0 – CONTRACTED STUDIES AND COMMUNITY COORDINATION 7.1 Contracted Studies 7.2 Community Meetings	<b>77</b> 77 81
SECTION 8.0 – ADDITIONAL INFORMATION	83
SECTION 9.0 – BIBLIOGRAPHY AND REFERENCES	84
<u>Figures</u>	
	Page
Figure 1: FIRM Index Figure 2: FIRM Notes to Users Figure 3: Map Legend for FIRM Figure 4: Floodway Schematic Figure 5: Wave Runup Transect Schematic Figure 6: Coastal Transect Schematic Figure 7: Frequency Discharge-Drainage Area Curves Figure 8: 1-Percent-Annual-Chance Total Stillwater Elevations for Coastal Areas Figure 9: Transect Location Map	8 16 19 30 31 31 40 53
<u>Tables</u>	
	<u>Page</u>
Table 1: Listing of NFIP Jurisdictions Table 2: Flooding Sources Included in this FIS Report Table 3: Flood Zone Designations by Community Table 4: Basin Characteristics Table 5: Principal Flood Problems Table 6: Historic Flooding Elevations Table 7: Dams and Other Flood Hazard Reduction Measures Table 8: Levee Systems Table 8: Levee Systems Table 9: Summary of Discharges Table 10: Summary of Non-Coastal Stillwater Elevations Table 11: Stream Gage Information used to Determine Discharges Table 12: Summary of Hydrologic and Hydraulic Analyses Table 13: Roughness Coefficients Table 14: Summary of Coastal Analyses Table 15: Tide Gage Analysis Specifics	24 32 32 34 35 35 36 40 40 42 52 53
Table 16: Coastal Transect Parameters	53

Table 17: Summary of Alluvial Fan Analyses	53
Table 18: Results of Alluvial Fan Analyses	54
Table 19: Countywide Vertical Datum Conversion	54
Table 20: Stream-Based Vertical Datum Conversion	55
Table 21: Base Map Sources	55
Table 22: Summary of Topographic Elevation Data used in Mapping	59
Table 23: Floodway Data	60
Table 24: Flood Hazard and Non-Encroachment Data for Selected Streams	74
Table 25: Summary of Coastal Transect Mapping Considerations	74
Table 26: Incorporated Letters of Map Change	75
Table 27: Community Map History	77
Table 28: Summary of Contracted Studies Included in this FIS Report	77
Table 29: Community Meetings	82
Table 30: Map Repositories	83
Table 31: Additional Information	84
Table 32: Bibliography and References	85

#### Volume 1 Exhibits

Flood Profiles Panel Silvies River 01-08 P

#### **Published Separately**

Flood Insurance Rate Map (FIRM)

### FLOOD INSURANCE STUDY REPORT HARNEY COUNTY, OREGON

#### **SECTION 1.0 - INTRODUCTION**

#### 1.1 The National Flood Insurance Program

The National Flood Insurance Program (NFIP) is a voluntary Federal program that enables property owners in participating communities to purchase insurance protection against losses from flooding. This insurance is designed to provide an alternative to disaster assistance to meet the escalating costs of repairing damage to buildings and their contents caused by floods.

For decades, the national response to flood disasters was generally limited to constructing flood-control works such as dams, levees, sea-walls, and the like, and providing disaster relief to flood victims. This approach did not reduce losses nor did it discourage unwise development. In some instances, it may have actually encouraged additional development. To compound the problem, the public generally could not buy flood coverage from insurance companies, and building techniques to reduce flood damage were often overlooked.

In the face of mounting flood losses and escalating costs of disaster relief to the general taxpayers, the U.S. Congress created the NFIP. The intent was to reduce future flood damage through community floodplain management ordinances, and provide protection for property owners against potential losses through an insurance mechanism that requires a premium to be paid for the protection.

The U.S. Congress established the NFIP on August 1, 1968, with the passage of the National Flood Insurance Act of 1968. The NFIP was broadened and modified with the passage of the Flood Disaster Protection Act of 1973 and other legislative measures. It was further modified by the National Flood Insurance Reform Act of 1994 and the Flood Insurance Reform Act of 2004. The NFIP is administered by the Federal Emergency Management Agency (FEMA), which is a component of the Department of Homeland Security (DHS).

Participation in the NFIP is based on an agreement between local communities and the Federal Government. If a community adopts and enforces floodplain management regulations to reduce future flood risks to new construction and substantially improved structures in Special Flood Hazard Areas (SFHAs), the Federal Government will make flood insurance available within the community as a financial protection against flood losses. The community's floodplain management regulations must meet or exceed criteria established in accordance with Title 44 Code of Federal Regulations (CFR) Part 60, Criteria for Land Management and Use.

SFHAs are delineated on the community's Flood Insurance Rate Maps (FIRMs). Under the NFIP, buildings that were built before the flood hazard was identified on the community's FIRMs are generally referred to as "Pre-FIRM" buildings. When the NFIP was created, the U.S. Congress recognized that insurance for Pre-FIRM buildings would be prohibitively expensive if the premiums were not subsidized by the Federal Government. Congress also recognized that most of these floodprone buildings were

built by individuals who did not have sufficient knowledge of the flood hazard to make informed decisions. The NFIP requires that full actuarial rates reflecting the complete flood risk be charged on all buildings constructed or substantially improved on or after the effective date of the initial FIRM for the community or after December 31, 1974, whichever is later. These buildings are generally referred to as "Post-FIRM" buildings.

#### 1.2 Purpose of this Flood Insurance Study Report

This Flood Insurance Study (FIS) Report revises and updates information on the existence and severity of flood hazards for the study area. The studies described in this report developed flood hazard data that will be used to establish actuarial flood insurance rates and to assist communities in efforts to implement sound floodplain management.

In some states or communities, floodplain management criteria or regulations may exist that are more restrictive than the minimum Federal requirements. Contact your State NFIP Coordinator to ensure that any higher State standards are included in the community's regulations.

#### 1.3 Jurisdictions Included in the Flood Insurance Study Project

This FIS Report covers the entire geographic area of Harney County, Oregon.

The jurisdictions that are included in this project area, along with the Community Identification Number (CID) for each community and the United States Geological Survey (USGS) 8-digit Hydrologic Unit Code (HUC-8) sub-basins affecting each, are shown in Table 1. The FIRM panel numbers that affect each community are listed. If the flood hazard data for the community is not included in this FIS Report, the location of that data is identified.

Table 1: Listing of NFIP Jurisdictions

NOTICE OF THE PROPERTY OF THE		HUC-8 Sub-	The second secon	If Not Included, Location of Flood Hazard
Community	CID	Basin(s)	Located on FIRM Panel(s)	Data
Burns Paiute Reservation	410281	17120001, 17120002	41025C1402F, 41025C1403E <sup>1</sup> , 41025C1404F, 41025C1406F, 41025C1408F, 41025C1412F, 41025C1440E, 41025C1445E, 41025C1475E, 41025C1500E, 41025C1525E <sup>1</sup> , 41025C1850E	
Burns, City of	410084	17120002	41025C1402F, 41025C1404F, 41025C1406F, 41025C1408F	7 7 7 8 77/21 MAJATA

<sup>1</sup> Panel Not Printed

Table 1: Listing of NFIP Jurisdictions (continued)

	· • • • • • • • • • • • • • • • • • • •	·9 · · · · · · ·	unstictions (continued)	
Community  Harney County, Unincorporated Areas	CID 410083	HUC-8 Sub- Basin(s) 16040201, 16040205, 17050109, 17050116, 17070303, 17120001, 17120002, 17120004, 17120005, 17120007, 17120008, 17120009	Located on FIRM Panel(s)  41025C0025E¹, 41025C0050E¹, 41025C0075E¹, 41025C0100E¹, 41025C0125E¹, 41025C0200E¹, 41025C0225E¹, 41025C0200E¹, 41025C0225E¹, 41025C0300E¹, 41025C0320E, 41025C0325E¹, 41025C0330E, 41025C0325E¹, 41025C0330E, 41025C0335E, 41025C0375E¹, 41025C0345E, 41025C0375E¹, 41025C0400E, 41025C0425E, 41025C0400E¹, 41025C0425E, 41025C0500E¹, 41025C0525E¹, 41025C0500E¹, 41025C0620E, 41025C0615E, 41025C0620E, 41025C0635E, 41025C0630E, 41025C0635E, 41025C0630E, 41025C0635E, 41025C0630E, 41025C0635E, 41025C0630E, 41025C0635E, 41025C06525E¹, 41025C0660E, 41025C06525E¹, 41025C0625E¹, 41025C0650E¹, 41025C0625E¹, 41025C0650E¹, 41025C0625E¹, 41025C0650E¹, 41025C0625E¹, 41025C0700E¹, 41025C0625E¹, 41025C0700E¹, 41025C075E¹, 41025C0800E, 41025C0925E¹, 41025C0900E¹, 41025C0925E¹, 41025C100E¹, 41025C1036F, 41025C1039F, 41025C1036F, 41025C1039F, 41025C1045F¹, 41025C1125E¹, 41025C1100E¹, 41025C1125E¹, 41025C1100E¹, 41025C1125E¹, 41025C1100E¹, 41025C1125E¹, 41025C120E¹, 41025C1225E¹, 41025C120E¹, 41025C1225E¹, 41025C130E¹, 41025C125E¹, 41025C120E¹, 41025C125E¹, 41025C130E¹, 41025C1325E¹, 41025C130E¹, 41025C1325E¹, 41025C1300E¹, 41025C1325E¹, 41025C1300E¹, 41025C1325E¹, 41025C1300E¹,	If Not Included, Location of Flood Hazard Data
			41025C1375E <sup>1</sup> , 41025C1400E <sup>1</sup> , 41025C1401E <sup>1</sup> , 41025C1402F, 41025C1403E <sup>1</sup> , 41025C1404F,	
			41025C1403E , 41025C1404F, 41025C1406F, 41025C1407F, 41025C1408F, 41025C1409F	

<sup>1</sup> Panel Not Printed

Table 1: Listing of NFIP Jurisdictions (continued)

1	THE PARTY OF THE P	Ι''	THE PROPERTY OF THE PROPERTY O	I.E. B. 1 - 4
				If Not Included,
		HUC-8		Location of
		Sub-		Flood Hazard
Community	CID	Basin(s)	Located on FIRM Panel(s)	Data
Harney County, Unincorporated Areas (continued)	410083	16040201, 16040205, 17050109, 17050116, 17070303, 17120002, 17120003, 17120005, 17120007, 17120009	41025C1411E, 41025C1412F, 41025C1415E, 41025C1430E, 41025C1430E, 41025C1440E, 41025C1435E, 41025C1440E, 41025C1435E, 41025C1475E, 41025C1500E, 41025C1525E¹, 41025C1500E¹, 41025C1525E¹, 41025C1500E¹, 41025C1625E¹, 41025C1600E¹, 41025C1625E¹, 41025C1650E¹, 41025C1625E¹, 41025C1600E¹, 41025C1675E¹, 41025C1700E, 41025C1775E, 41025C1700E, 41025C1775E, 41025C1800E, 41025C1875E, 41025C1800E, 41025C1925E, 41025C1900E, 41025C1925E, 41025C1900E, 41025C1975E¹, 41025C2000E¹, 41025C2025E¹, 41025C200E¹, 41025C2025E¹, 41025C200E, 41025C2275E, 41025C200E, 41025C2275E, 41025C2300E, 41025C2275E, 41025C2300E, 41025C2375E¹, 41025C2400E¹, 41025C2375E¹, 41025C2400E¹, 41025C2475E¹, 41025C250E, 41025C250E¹, 41025C3150E¹, 41025C3150E¹, 41025C3150E¹, 41025C3150E¹, 41025C3150E¹, 41025C3155E¹, 41025C3300E¹, 41025C3325E, 41025C3350E, 41025C3325E, 41025C3350E, 41025C3375E, 41025C3350E, 41025C3375E, 41025C3350E, 41025C3375E¹, 41025C3350E, 41025C3375E¹, 41025C3350E, 41025C3375E¹, 41025C3350E, 41025C3375E, 41025C3350E, 41025C3375E¹, 41025C33450E¹, 41025C33456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025C3456E¹, 41025	Data

<sup>&</sup>lt;sup>1</sup> Panel Not Printed

Table 1: Listing of NFIP Jurisdictions (continued)

THE STATE OF THE S			unsuictions (continued)	
Community	CID	HUC-8 Sub- Basin(s)	Located on FIRM Panel(s)	If Not Included, Location of Flood Hazard Data
Harney County, Unincorporated Areas (continued)	410083	16040201, 16040205, 17050109, 17050116, 17070303, 17120001, 17120003, 17120004, 17120005, 17120007, 17120008, 17120009	41025C3500E <sup>1</sup> , 41025C3525E <sup>1</sup> , 41025C3500E <sup>1</sup> , 41025C3625E <sup>1</sup> , 41025C3600E <sup>1</sup> , 41025C3625E <sup>1</sup> , 41025C3650E <sup>1</sup> , 41025C375E <sup>1</sup> , 41025C3700E <sup>1</sup> , 41025C3775E <sup>1</sup> , 41025C3750E <sup>1</sup> , 41025C3825E <sup>1</sup> , 41025C3800E <sup>1</sup> , 41025C3825E <sup>1</sup> , 41025C3850E <sup>1</sup> , 41025C3825E <sup>1</sup> , 41025C3900E <sup>1</sup> , 41025C3925E <sup>1</sup> , 41025C3950E <sup>1</sup> , 41025C3925E <sup>1</sup> , 41025C4000E <sup>1</sup> , 41025C4025E <sup>1</sup> , 41025C4050E <sup>1</sup> , 41025C4025E <sup>1</sup> , 41025C4100E <sup>1</sup> , 41025C4125E <sup>1</sup> , 41025C4200E <sup>1</sup> , 41025C4225E <sup>1</sup> , 41025C4200E <sup>1</sup> , 41025C4225E <sup>1</sup> , 41025C4200E <sup>1</sup> , 41025C4325E <sup>1</sup> , 41025C4300E <sup>1</sup> , 41025C4325E <sup>1</sup> , 41025C4400E <sup>1</sup> , 41025C4325E <sup>1</sup> , 41025C4400E <sup>1</sup> , 41025C4425E <sup>1</sup> , 41025C4400E <sup>1</sup> , 41025C4425E <sup>1</sup> , 41025C4450E <sup>1</sup> , 41025C450E <sup>1</sup> , 41025C450E <sup>1</sup> , 41025C450E <sup>1</sup> , 41025C4675E <sup>1</sup> , 41025C4600E <sup>1</sup> , 41025C4675E <sup>1</sup> , 41025C4600E <sup>1</sup> , 41025C4725E <sup>1</sup> , 41025C4600E <sup>1</sup> , 41025C4725E <sup>1</sup> , 41025C4700E <sup>1</sup> , 41025C4725E <sup>1</sup> , 41025C4800E <sup>1</sup> , 41025C4725E <sup>1</sup> , 41025C4900E <sup>1</sup> , 41025C4925E <sup>1</sup> , 41025C4900E <sup>1</sup> , 41025C4925E <sup>1</sup> , 41025C505050E <sup>1</sup> , 41025C5025E <sup>1</sup> , 41025C5050E <sup>1</sup> , 41025C5025E <sup>1</sup> , 41025C5000E <sup>1</sup> , 41025C5025E <sup>1</sup> , 41025C5050E <sup>1</sup> , 41025C5175E <sup>1</sup> , 41025C5300E <sup>1</sup> , 41025C5175E <sup>1</sup> , 41025C5300E <sup>1</sup> , 41025C5375E <sup>1</sup> , 41025C5500E <sup>1</sup> , 41025C5525E <sup>1</sup> , 41025C5505E <sup>1</sup> , 41025C550E <sup>1</sup>	

<sup>&</sup>lt;sup>1</sup> Panel Not Printed

Table 1: Listing of NFIP Jurisdictions (continued)

Community	CID	HUC-8 Sub- Basin(s)	Located on FIRM Panel(s)	if Not Included, Location of Flood Hazard Data
Harney County, Unincorporated Areas (continued)	410083	16040201, 16040205, 17050109, 17050116, 17070201, 17070303, 17120001, 17120003, 17120004, 17120005, 17120008, 17120008, 17120009	41025C5650E <sup>1</sup> , 41025C5675E <sup>1</sup> , 41025C5700E <sup>1</sup> , 41025C5725E <sup>1</sup>	
Hines, City of	410085	17120002	41025C1404F, 41025C1411E, 41025C1412F	T SPALABINO A

Panel Not Printed

#### 1.4 Considerations for using this Flood Insurance Study Report

The NFIP encourages State and local governments to implement sound floodplain management programs. To assist in this endeavor, each FIS Report provides floodplain data, which may include a combination of the following: 10-, 4-, 2-, 1-, and 0.2-percent annual chance flood elevations (the 1-percent-annual-chance flood elevation is also referred to as the Base Flood Elevation (BFE)); delineations of the 1-percent-annual-chance and 0.2-percent-annual-chance floodplains; and 1-percent-annual-chance floodway. This information is presented on the FIRM and/or in many components of the FIS Report, including Flood Profiles, Floodway Data tables, Summary of Non-Coastal Stillwater Elevations tables, and Coastal Transect Parameters tables (not all components may be provided for a specific FIS).

This section presents important considerations for using the information contained in this FIS Report and the FIRM, including changes in format and content. Figures 1, 2, and 3 present information that applies to using the FIRM with the FIS Report.

 Part or all of this FIS Report may be revised and republished at any time. In addition, part of this FIS Report may be revised by a Letter of Map Revision (LOMR), which does not involve republication or redistribution of the FIS Report, Refer to Section 6.5 of this FIS Report for information about the process to revise the FIS Report and/or FIRM.

It is, therefore, the responsibility of the user to consult with community officials by contacting the community repository to obtain the most current FIS Report components. Communities participating in the NFIP have established repositories of flood hazard data for floodplain management and flood insurance

purposes. Community map repository addresses are provided in Table 30, "Map Repositories," within this FIS Report.

- New FIS Reports are frequently developed for multiple communities, such as entire counties. A countywide FIS Report incorporates previous FIS Reports for individual communities and the unincorporated area of the county (if not jurisdictional) into a single document and supersedes those documents for the purposes of the NFIP.
- The initial Countywide FIS Report for Harney County became effective on April 20, 2022. Refer to Table 27 for information about subsequent revisions to the FIRMs.
- FEMA does not design, build, inspect, operate, maintain, or certify levees. FEMA is responsible for accurately identifying flood hazards and communicating those hazards and risks to affected stakeholders. FEMA has identified one or more levee systems in this jurisdiction summarized in Table 8 of this FIS Report. For FEMA to accredit the identified levee systems, the levee systems must meet the criteria of the Code of Federal Regulations, Title 44, Section 65.10 (44 CFR 65.10), titled "Mapping of Areas Protected by Levee Systems."

Information on the levee systems in this jurisdiction can be obtained from the USACE National Levee Database (<a href="https://levees.sec.usace.army.mil/">https://levees.sec.usace.army.mil/</a>). For additional information, the user should contact the appropriate jurisdiction floodplain administrator and the levee owner or sponsor.

FEMA has developed a Guide to Flood Maps (FEMA 258) and online tutorials to
assist users in accessing the information contained on the FIRM. These include
how to read panels and step-by-step instructions to obtain specific information. To
obtain this guide and other assistance in using the FIRM, visit the FEMA Web site
at <a href="https://www.fema.gov/flood-maps/tutorials">www.fema.gov/flood-maps/tutorials</a>.

The FIRM Index in Figure 1 shows the overall FIRM panel layout within Harney County, and also displays the panel number and effective date for each FIRM panel in the county. Other information shown on the FIRM Index includes community boundaries, flooding sources, watershed boundaries, and USGS HUC-8 codes.



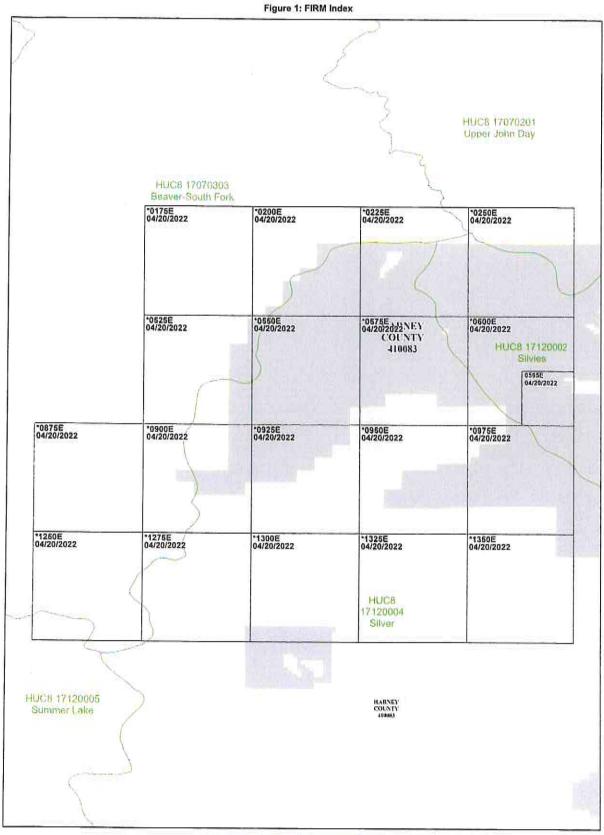




Figure 1: FIRM Index (continued)

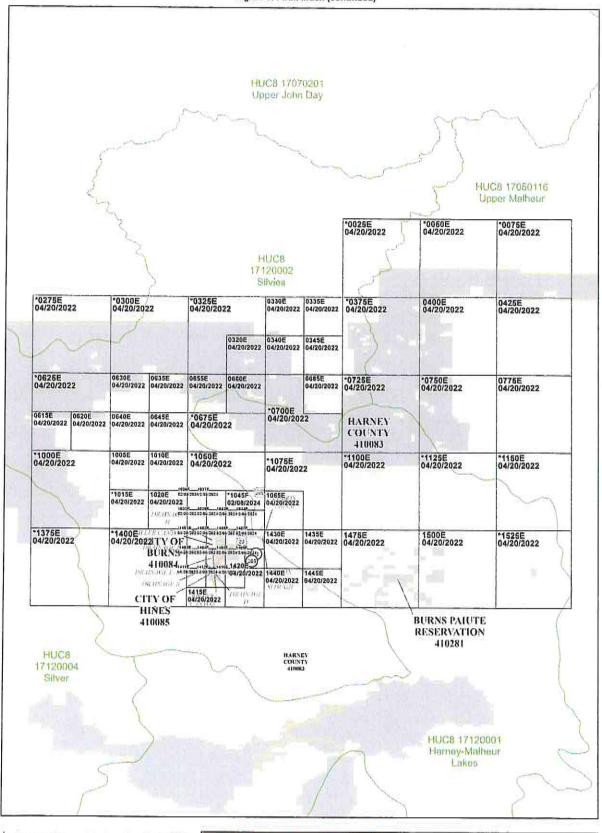



PANEL NOT PRINTED - NO SPECIAL FLOOD HAZARD AREAS

#### NATIONAL FLOOD INSURANCE PROGRAM

HARNEY COUNTY, OREGON AND INCORPORATED AREAS

#### PANELS PRINTED:

0320, 0330, 0330, 0340, 0345, 0400, 0425, 0615, 0320, 0630, 0635, 0640, 0645, 0655, 0860, 0685, 0775, 1005, 1610, 1020, 1036, 1037, 1038, 1039, 1043, 1044, 1065, 1402, 1404, 1408, 1407, 1408, 1409, 1411, 1412, 1415, 1416, 1420, 1430, 1435, 1440, 1445, 1475, 1500




MAP NUMBER 41025CIND2B


FEBRUARY 08, 2024

Figure 1: FIRM Index (continued)

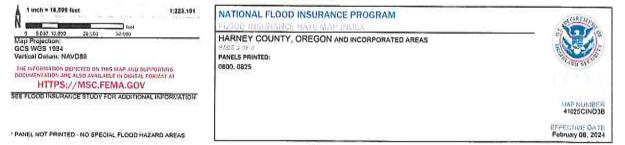	**************************************	*0125E 04/20/2022	*0150E 04/20/2022	
	HARNEY COUNTY 410083			
	*0450E 04/20/2022	*0475E 04/20/2022	*0500E 04/20/2022	
	0800€ 04/20/2022	0825E 04/20/2022	*0850E 04/20/2022	
	*1175E 04/20/2022 HARN COUN	HUC8 17050116 Upper Malheur	*1225E 04/20/2022	
	41000			
1	11650E 04/20/2022 BURNS PARTE RESERVATION 410281	*1575E 04/20/2022	*1600E 04/20/2022	



F1625E	) 1.1650E	HARNEY COUNTY *1675E110983 04/20/2022	11700E	1726F	-
*1625E 04/20/2022	*1650E 04/20/2022	04/20/2022	1700E 04/20/2022	1726E 04/20/2022	
*2000E 04/20/2022	*2025E 04/20/2022	*2050E 04/20/2022	2075E 04/20/2022 HUC8 17120004	2100E 04/20/2022	
*2375E 04/20/2022	*2400E 04/20/2022	*2425E 04/20/2022	*2450E 04/20/2022	*2475E 04/20/2022	
*2750E 04/20/2022 HUC8 1712000 Summer Lake		*2800E 04/20/2022	*2825E 04/20/2022	*2850E 04/20/2022	
*3125E 04/20/2022	*3150E 04/20/2022	*3175E 04/20/2022	*3200E 04/20/2022 COUNTY 410003	*3225E 04/20/2022	
*3600E 04/20/2022	*3525E 04/20/2022	*3550E 04/20/2022	*3575E 04/20/2022	*3600E 04/20/2022	
*3876E 04/20/2022	*3900E 04/20/2022	HUC8 1712000 Warner Lakes 13925E 04/20/2022	73950E 04/20/2022	*3975E 04/20/2022	
		VILLE	5	HUC8 17120008 Guano	

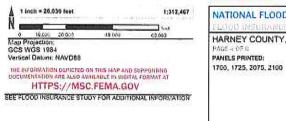

NATIONAL FLOOD INSURANCE PROGRAM


HARNEY COUNTY, OREGON AND INCORPORATED AREAS



PANEL NOT PRINTED - NO SPECIAL FLOOD HAZARD AREAS

Figure 1: FIRM Index (continued)





SEE FLOOD INSURANCE STUDY FOR ADDITIONAL INFORMATION

\* PANEL NOT PRINTED - NO SPECIAL FLOOD HAZARD AREAS

#### NATIONAL FLOOD INSURANCE PROGRAM

HARNEY COUNTY, OREGON AND INCORPORATED AREAS

PANELS PRINTED:

1750, 1775, 1800, 1825, 1850, 1875, 1900, 2125, 2150, 2175, 2200, 2225, 2250, 2275, 2500, 2525, 2550, 2575, 2600, 2650, 2925, 2950, 2975, 3000, 3325, 3350, 3375



MAP NUMBER 41025CINDSB

February 08, 2024

Figure 1: FIRM Index (continued)

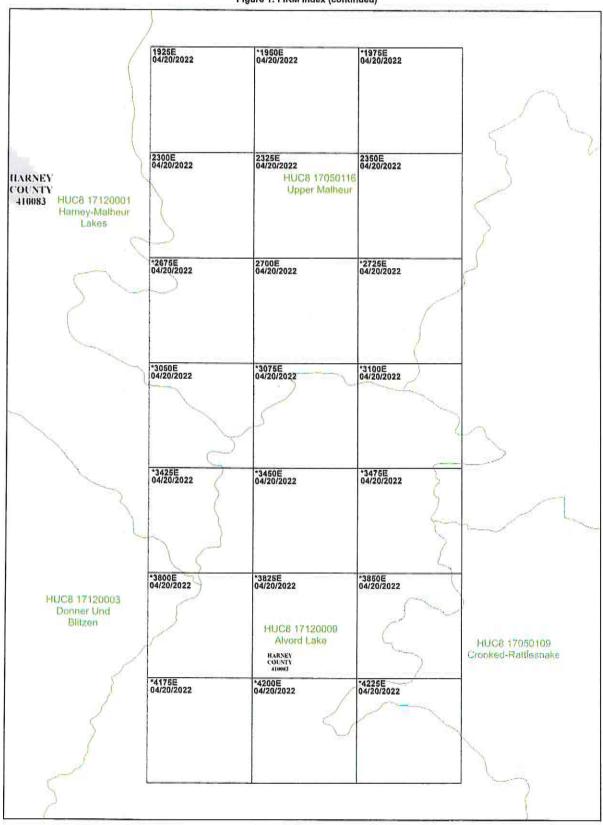
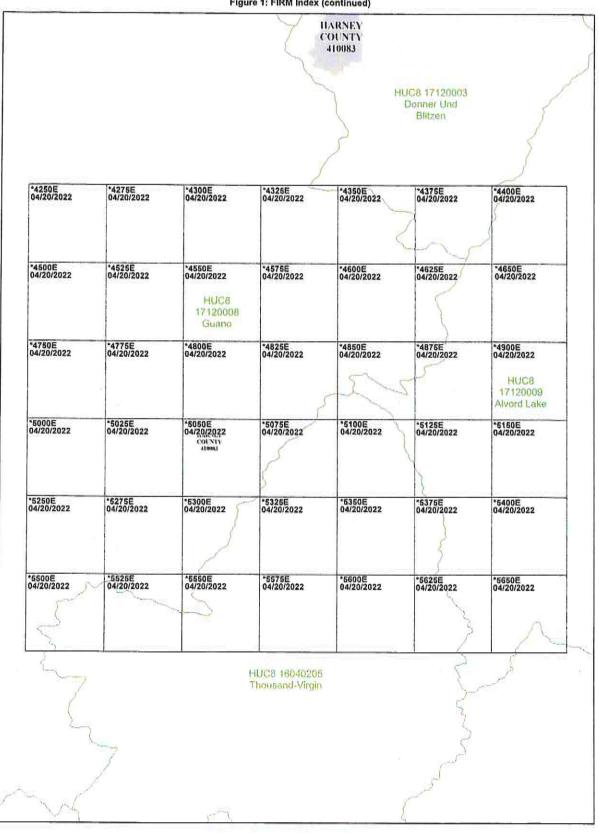
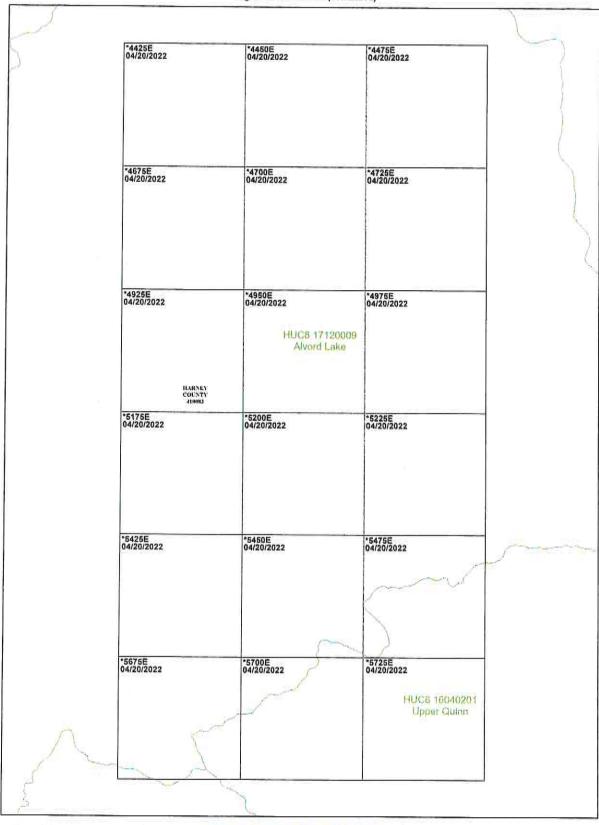


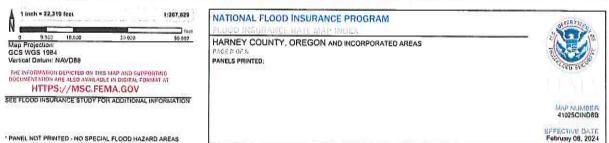


Figure 1: FIRM Index (continued)









Each FIRM panel may contain specific notes to the user that provide additional information regarding the flood hazard data shown on that map. However, the FIRM panel does not contain enough space to show all the notes that may be relevant in helping to better understand the information on the panel. Figure 2 contains the full list of these notes.

Figure 2: FIRM Notes to Users

#### NOTES TO USERS

For information and questions about this Flood Insurance Rate Map (FIRM), available products associated with this FIRM including historic versions of this FIRM, how to order products, or the National Flood Insurance Program in general, please call the FEMA Mapping and Insurance eXchange at 1-877-FEMA-MAP (1-877-336-2627) or visit the FEMA Flood Map Service Center website at <a href="mac.fema.gov">msc.fema.gov</a>. Available products may include previously Issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. Many of these products can be ordered or obtained directly from the website. Users may determine the current map date for each FIRM panel by visiting the FEMA Flood Map Service Center website or by calling the FEMA Mapping and Insurance eXchange.

Communities annexing land on adjacent FIRM panels must obtain a current copy of the adjacent panel as well as the current FIRM Index. These may be ordered directly from the Flood Map Service Center at the number listed above.

For community and countywide map dates, refer to Table 27 in this FIS Report.

To determine if flood insurance is available in the community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

<u>PRELIMINARY FIS REPORT</u>: FEMA maintains information about map features, such as street locations and names, in or near designated flood hazard areas. Requests to revise information in or near designated flood hazard areas may be provided to FEMA during the community review period, at the final Consultation Coordination Officer's meeting, or during the statutory 90-day appeal period. Approved requests for changes will be shown on the final printed FIRM.

The map is for use in administering the NFIP. It may not identify all areas subject to flooding, particularly from local drainage sources of small size. Consult the community map repository to find updated or additional flood hazard information.

BASE FLOOD ELEVATIONS: For more detailed information in areas where Base Flood Elevations (BFEs) and/or floodways have been determined, consult the Flood Profiles and Floodway Data and/or Summary of Non-Coastal Stillwater Elevations tables within this FIS Report. Use the flood elevation data within the FIS Report in conjunction with the FIRM for construction and/or floodplain management.

<u>FLOODWAY INFORMATION</u>: Boundaries of the floodways were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the FIS Report for this jurisdiction.

#### Figure 2: FIRM Notes to Users, continued

FLOOD CONTROL STRUCTURE INFORMATION: Certain areas not in Special Flood Hazard Areas may have reduced flood hazards due to flood control structures. Refer to Section 4.3 "Dams and Other Flood Hazard Reduction Measures" of this FIS Report for information on flood control structures for this jurisdiction.

<u>PROJECTION INFORMATION</u>: The projection used in the preparation of the map was Universal Transverse Mercator (UTM) Zone 11. The horizontal datum was the North American Datum of 1983 (NAD83), GRS 1980 spheroid. Differences in datum, spheroid, projection or State Plane zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of the FIRM,

ELEVATION DATUM: Flood elevations on the FIRM are referenced to the North American Vertical Datum of 1988 (NAVD88). These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <a href="https://www.ngs.noaa.gov">www.ngs.noaa.gov</a>.

Local vertical monuments may have been used to create the map. To obtain current monument information, please contact the appropriate local community listed in Table 30 of this FIS Report.

BASE MAP INFORMATION: Base map information shown on the FIRM panels dated 04/20/2022 was provided in digital format by the Oregon Department of Geology and Mineral Industries, the Oregon Department of Transportation, the Bureau of Land Management, the United States Geological Survey and the United States Department of Agriculture - Farm Service Agency (USDA-FSA) Aerial Photography Field Office as part of the National Agriculture Imagery Program (NAIP). NAIP data was derived from digital orthophotography at a 1-meter resolution from photography dated 2016. Basemap information for FIRM panels dated February 8, 2024 was provided in digital format by the United States Geological Survey (USGS). The basemap shown is the USGS National Map: Orthoimagery. Dates include most recently refreshed data. For information about base maps, refer to Section 6.2 "Base Map" in this FIS Report.

The map reflects more detailed and up-to-date stream channel configurations than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables may reflect stream channel distances that differ from what is shown on the map.

Corporate limits shown on the map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after the map was published, map users should contact appropriate community officials to verify current corporate limit locations.

#### NOTES FOR FIRM INDEX

REVISIONS TO INDEX: As new studies are performed and FIRM panels are updated within Harney County, Oregon, corresponding revisions to the FIRM Index will be incorporated within the FIS Report to reflect the effective dates of those panels. Please refer to Table 27 of this FIS Report to determine the most recent FIRM revision date for each community. The most recent FIRM panel effective date will correspond to the most recent index date.

Figure 2: FIRM Notes to Users, continued

#### SPECIAL NOTES FOR SPECIFIC FIRM PANELS

This Notes to Users section was created specifically for Harney County, Oregon, effective February 8, 2024.

NON-ACCREDITED LEVEE SYSTEM: This panel contains a levee system that has not been accredited and is therefore not recognized as reducing the 1-percent-annual-chance flood hazard.

<u>FLOOD RISK REPORT</u>: A Flood Risk Report (FRR) may be available for many of the flooding sources and communities referenced in this FIS Report. The FRR is provided to increase public awareness of flood risk by helping communities identify the areas within their jurisdictions that have the greatest risks. Although non-regulatory, the information provided within the FRR can assist communities in assessing and evaluating mitigation opportunities to reduce these risks. It can also be used by communities developing or updating flood risk mitigation plans. These plans allow communities to identify and evaluate opportunities to reduce potential loss of life and property. However, the FRR is not intended to be the final authoritative source of all flood risk data for a project area; rather, it should be used with other data sources to paint a comprehensive picture of flood risk.

Each FIRM panel contains an abbreviated legend for the features shown on the maps. However, the FIRM panel does not contain enough space to show the legend for all map features. Figure 3 shows the full legend of all map features. Note that not all of these features may appear on the FIRM panels in Harney County.

#### Figure 3: Map Legend for FIRM

SPECIAL FLOOD HAZARD AREAS: The 1% annual chance flood, also known as the base flood or 100-year flood, has a 1% chance of happening or being exceeded each year. Special Flood Hazard Areas are subject to flooding by the 1% annual chance flood. The Base Flood Elevation is the water surface elevation of the 1% annual chance flood. The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights. See note for specific types. If the floodway is too narrow to be shown, a note is shown.

Special Flood Hazard Areas subject to inundation by the 1% annual chance flood (Zones A, AE, AH, AO, AR, A99, V and VE)

- Zone A The flood insurance rate zone that corresponds to the 1% annual chance floodplains. No base (1% annual chance) flood elevations (BFEs) or depths are shown within this zone.
- Zone AE The flood insurance rate zone that corresponds to the 1% annual chance floodplains. Base flood elevations derived from the hydraulic analyses are shown within this zone.
- Zone AH The flood insurance rate zone that corresponds to the areas of 1% annual chance shallow flooding (usually areas of ponding) where average depths are between 1 and 3 feet. Whole-foot BFEs derived from the hydraulic analyses are shown at selected intervals within this zone.
- Zone AO The flood insurance rate zone that corresponds to the areas of 1% annual chance shallow flooding (usually sheet flow on sloping terrain) where average depths are between 1 and 3 feet. Average whole-foot depths derived from the hydraulic analyses are shown within this zone.
- Zone AR The flood insurance rate zone that corresponds to areas that were formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
- Zone A99 The flood insurance rate zone that corresponds to areas of the 1% annual chance floodplain that will be protected by a Federal flood protection system where construction has reached specified statutory milestones. No base flood elevations or flood depths are shown within this zone.
  - Zone V The flood insurance rate zone that corresponds to the 1% annual chance coastal floodplains that have additional hazards associated with storm waves. Base flood elevations are not shown within this zone.
- Zone VE is the flood insurance rate zone that corresponds to the 1% annual chance coastal floodplains that have additional hazards associated with storm waves. Base flood elevations derived from the coastal analyses are shown within this zone as static whole-foot elevations that apply throughout the zone.

Figure 3: Map Legend for FIRM, continued

	Regulatory Floodway determined in Zone AE.
OTHER AREAS OF FLO	OOD HAZARD
	Shaded Zone X: Areas of 0.2% annual chance flood hazards and areas of 1% annual chance flood hazards with average depths of less than 1 foot or with drainage areas less than 1 square mile.
	Future Conditions 1% Annual Chance Flood Hazard – Zone X: The flood insurance rate zone that corresponds to the 1% annual chance floodplains that are determined based on future-conditions hydrology. No base flood elevations or flood depths are shown within this zone.
	Area with Reduced Flood Hazard due to Accredited or Provisionally Accredited Levee System: Area is shown as reduced flood hazard from the 1-percent-annual-chance or greater flood by a levee system. Overtopping or failure of any levee system is possible.
	Area with Flood Risk due to Levee: Areas where a non-accredited levee, dike, or other flood control structure is shown as providing protection to less than the 1% annual chance flood.
OTHER AREAS	The state of the s
	Zone D (Areas of Undetermined Flood Hazard): The flood insurance rate zone that corresponds to unstudied areas where flood hazards are undetermined, but possible.
NO SCREEN	Unshaded Zone X: Areas of minimal flood hazard.
FLOOD HAZARD AND	OTHER BOUNDARY LINES
(ortho) (vector)	Flood Zone Boundary (white line on ortho-photography-based mapping; gray line on vector-based mapping)
The state of the s	Limit of Study
	Jurisdiction Boundary
<u> </u>	Limit of Moderate Wave Action (LiMWA): Indicates the inland limit of the area affected by waves greater than 1.5 feet
GENERAL STRUCTURE	is
Aqueduct Chennel Culvert Storm Sewer	Channel, Culvert, Aqueduct, or Storm Sewer
Dam Jetty Weir	Dam, Jetty, Weir

Figure 3: Map Legend for FIRM, continued

nonunumanuma.	Levee, Dike, or Floodwall
Bridge	Bridge
REFERENCE MARKERS	
22.0	River mile Markers
CROSS SECTION & TRAN	NSECT INFORMATION
B 20.2	Lettered Cross Section with Regulatory Water Surface Elevation (BFE)
5280 21.1	Numbered Cross Section with Regulatory Water Surface Elevation (BFE)
17.5	Unlettered Cross Section with Regulatory Water Surface Elevation (BFE)
8	Coastal Transect
	Profile Baseline: Indicates the modeled flow path of a stream and is shown on FIRM panels for all valid studies with profiles or otherwise established base flood elevation.
	Coastal Transect Baseline: Used in the coastal flood hazard model to represent the 0.0-foot elevation contour and the starting point for the transect and the measuring point for the coastal mapping.
~~~ 513 ~~~	Base Flood Elevation Line
ZONE AE (EL 16)	Static Base Flood Elevation value (shown under zone label)
ZONE AO (DEPTH 2)	Zone designation with Depth
ZONE AO (DEPTH 2) (VEL 15 FPS)	Zone designation with Depth and Velocity
BASE MAP FEATURES	
Missouri Creek	River, Stream or Other Hydrographic Feature
(234)	Interstate Highway
234	U.S. Highway
234)	State Highway

Figure 3: Map Legend for FIRM, continued

234	County Highway
MAPLE LANE	Street, Road, Avenue Name, or Private Drive if shown on Flood Profile
RAILROAD	Railroad
	Horizontal Reference Grid Line
	Horizontal Reference Grid Ticks
+	Secondary Grid Crosshairs
Land Grant	Name of Land Grant
7	Section Number
R. 43 W. T. 22 N.	Range, Township Number
<sup>42</sup> 76 <sup>000m</sup> E	Horizontal Reference Grid Coordinates (UTM)
365000 FT	Horizontal Reference Grid Coordinates (State Plane)
80° 16′ 52.5″	Corner Coordinates (Latitude, Longitude)

#### SECTION 2.0 - FLOODPLAIN MANAGEMENT APPLICATIONS

#### 2.1 Floodplain Boundaries

To provide a national standard without regional discrimination, the 1-percent-annual-chance (100-year) flood has been adopted by FEMA as the base flood for floodplain management purposes. The 0.2-percent-annual-chance (500-year) flood is employed to indicate additional areas of flood hazard in the community.

Each flooding source included in the project scope has been studied and mapped using professional engineering and mapping methodologies that were agreed upon by FEMA and Harney County as appropriate to the risk level. Flood risk is evaluated based on factors such as known flood hazards and projected impact on the built environment. Engineering analyses were performed for each studied flooding source to calculate its 1-percent-annual-chance flood elevations; elevations corresponding to other floods (e.g. 10-, 4-, 2-, 0.2-percent-annual-chance, etc.) may have also been computed for certain flooding sources. Engineering models and methods are described in detail in Section 5.0 of this FIS Report. The modeled elevations at cross sections were used to delineate the floodplain boundaries on the FIRM; between cross sections, the boundaries were interpolated using elevation data from various sources. More information on specific mapping methods is provided in Section 6.0 of this FIS Report.

Depending on the accuracy of available topographic data (Table 22), study methodologies employed (Section 5.0), and flood risk, certain flooding sources may be mapped to show both the 1-percent and 0.2-percent-annual-chance floodplain boundaries, regulatory water surface elevations (BFEs), and/or a regulatory floodway. Similarly, other flooding sources may be mapped to show only the 1-percent-annual-chance floodplain boundary on the FIRM, without published water surface elevations. In cases where the 1-percent and 0.2-percent-annual-chance floodplain boundaries are close together, only the 1-percent-annual-chance floodplain boundary is shown on the FIRM. Figure 3, "Map Legend for FIRM", describes the flood zones that are used on the FIRMs to account for the varying levels of flood risk that exist along flooding sources within the project area. Table 2 and Table 3 indicate the flood zone designations for each flooding source and each community within Harney County, respectively.

Table 2, "Flooding Sources Included in this FIS Report," lists each flooding source, including its study limits, affected communities, mapped zone on the FIRM, and the completion date of its engineering analysis from which the flood elevations on the FIRM and in the FIS Report were derived. Descriptions and dates for the latest hydrologic and hydraulic analyses of the flooding sources are shown in Table 12. Floodplain boundaries for these flooding sources are shown on the FIRM (published separately) using the symbology described in Figure 3. On the map, the 1-percent-annual-chance floodplain corresponds to the SFHAs. The 0.2-percent-annual-chance floodplain shows areas that, although out of the regulatory floodplain, are still subject to flood hazards.

Small areas within the floodplain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data. The procedures to remove these areas from the SFHA are described in Section 6.5 of this FIS Report.

Table 2: Flooding Sources Included in this FIS Report

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- (streams or Basin(s)		Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Вгоwп Сапуоп	Burns Paiute Reservation; Burns, Confluence v City of, Harney County Silvies River Unincorporated Areas	Confluence with Silvies River	Approximately 6,200 feet upstream of Foley Drive	17120002	∞.		Z	AE	11/30/2021
Cricket Creek	Harney County, Unincorporated Areas	At the confluence with Emigrant Creek	61 feet southwest of centerline of Hines Logging Road	17120002	3.9		z	<	12/10/2012
Drainage B	Harney County, Unincorporated Areas; Hines, City of	Approximately 50 feet west of the intersection of South Hilltop Avenue and Howell Street	Approximately 1,465 feet upstream of outlet	17120002	0.3		z	A/X (Shaded)	12/10/2012
Drainage C	Harney County, Unincorporated Areas; Highway 20 Hines, City of	Highway 20	N Section Avenue	17120002	0.6		z	A / X (Shaded)	1982
Drainage D	Hamey County, Unincorporated Areas; Hines, City of	Hiker/Biker Trail near Sewage Lagoon	Approximately 650 feet upstream of King Avenue	17120002	1.3	- Thirties and the second	z	AE	11/30/2021
Drainage E	Burns, City of; Harney County, Unincorporated Areas; Hines, City of	Confluence with Drainage D	Confluences of Drainage E-1 and Drainage E-2	17120002	Many Lord		z	AE	11/30/2021
Drainage E-1	Burns Paiute Reservation; Burns, Confluence City of, Harney County Drainage E Unincorporated Areas	Confluence with Drainage E	Approximately 3,400 feet upstream of W Monroe Street	17120002	Ø.		Z	AE	11/30/2021
Drainage E-2	Bums, City of	Confluence with Drainage E	Approximately 4,300 feet upstream of confluence with Drainage E	17120002	9.0		Z	ĄĘ	11/30/2021

Table 2: Flooding Sources Included in this FIS Report (continued)

	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Bums Rese Ham Unin	Burns Paiute Reservation; Harney County, Unincorporated Areas	Confluence with Miller Canyon	Approximately 2,000 feet upstream of Pasigo Street	17120002	0.7		Z	4	11/30/2021
East Fork Silvies Harn River Uninc	Harney County, Unincorporated Areas	Confluence with Maiheur Lake	Separation of Silvies River into two forks	17120001, 17120002	37.4		Z	4	06/17/2016
East Harney Rese County Basin Harn	Burns Paiute Reservation; Harney County, Unincorporated Areas	Area east of City of Burns and north of Malheur Lake	Area east of City of Burns and north of Matheur Lake	17120001,		14.2	Z	4	10/15/2020
Emigrant Creek Uninc	Harney County, Unincorporated Areas	At the confluence with the Silvies River	1,943 feet upstream of the confluence of Little Emigrant Creek	17120002	19.4		Z	- A	12/10/2012
Foley Stough Uninc	Harney County, Unincorporated Areas	At Fry Road	At West Loop Road	17120002	4		<b>&gt;</b>	A	11/30/2021
Foley Stough Uninc	Hamey County, Unincorporated Areas	At West Loop Road	Divergence from Silvies River	17120002	0.2		2	4	11/30/2021
Foley Slough Flow Harne Split 1	Harney County, Unincorporated Areas	Convergence with Silvies River East Overbank Flow Split	Divergence from Foley Slough	17120002	2.8		>	A Ti	11/30/2021
Foley Slough Flow Hame Split 2 Uninc	Harney County, Unincorporated Areas	Convergence with Foley Slough Flow Split 1	Divergence from Foley Slough	17120002	£.	Marie Arthur (1907) - This (1907) A Million (1907) - Million (1907) A Million (1907) - Mill	<b>*</b>	AE	11/30/2021
Foley Slough Flow Harne Split 3	Harney County, Unincorporated Areas	Convergence with Foley Slough Flow Split 1	Divergence from Foley Slough Flow Split 1	17120002	6.8		<b>&gt;</b>	AE	11/30/2021

Table 2: Flooding Sources Included in this FIS Report (continued)

			,	(papilipa) madan an a	iaal a ladar.	(manual)			
Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub- Basin(s)	Length (mi) (streams or coastlines)	Area (mi²) (estuaries or ponding)	Floodway (Y/N)	Zone shown on FIRM	Date of Analysis
Foley Slough Flow Split 4	Harney County, Unincorporated Areas	Convergence with Foley Slough Flow Split 3	Divergence from Foley Slough Flow Split 2	17120002	0.5		>	Æ	11/30/2021
Foley Slough Flow To Silvies River	Harney County, Unincorporated Areas	Convergence with Silvies River	Divergence from Foley Slough	17120002	0.5	11000	>-	AE	11/30/2021
Hay Creek	Harney County, Unincorporated Areas	At the confluence with Emigrant Creek	4,846 feet upstream of the confluence of West Fork Hay Creek	17120002	4		Z	<<	12/10/2012
Malheur River	Hamey County, Unincorporated Areas	In the vicinity of Drewsey	In the vicinity of Drewsey	17050116	2.0	TOTAL TRACT VALUE THAT A CAPTALAN	Z	ď	1982
Miller Canyon	Burns Paiute Reservation; Harney County, Unincorporated Areas	Confluence with Silvies River	Approximately 4,600 feet upstream of Radar Lane	17120002	ć.		Z	4	11/30/2021
Poison Creek	Harney County, Unincorporated Areas	Confluence with Poison Creek Slough at Highway 20	Approximately 8,600 feet north of Highway 20	17120001	1.7		Z	4	06/17/2016
Poison Creek	Harney County, Unincorporated Areas	Approximately 4,200 feet north of Highway 20	Approximately 200 feet east of Highway 395	17120001	2.0	THE RESERVE AND ADDRESS OF PROBLEMS AND ADDRESS OF PRO	2	∢	06/17/2016
Poison Creek Slough	Hamey County, Unincorporated Areas	Approximately 15,500 feet east of Highway 78 along Rye Grass Lane	Confluence of Poison Creek at Highway 20	17120001	14.2		z	V V	06/17/2016

Table 2: Flooding Sources Included in this FIS Report (continued)

Flooding Source	Community	Downstream Limit	Upstream Limit	HUC-8 Sub-	Length (mi) (streams or coastlines)	Area (ml²) (estuaries or ponding)	Floodway	Zone shown on	Date of
Silvies River	Harney County, Unincorporated Areas	Separation of Silvies River into two forks	Approximately 2,700 feet downstream from Highway 78	17120002	1	Ď.	Z	A	06/17/2016
Silvies River	Burns Paiute Reservation; Burns, City of; Harney County, Unincorporated Areas	Approximately 2,700 feet downstream from At West Loop Road Highway 78	At West Loop Road	17120002	හ		<b>&gt;</b>	A	11/30/2021
Silvies River	Harney County, Unincorporated Areas	At West Loop Road	Approximately 19,300 feet upstream of West Loop Road	17120002	3.7		Z	<b>A</b>	11/30/2021
Silvies River	Harney County, feet upstream of Unincorporated Areas; West Loop Road	,300	4,903 feet upstream from the confluence with Charlie Creek	17120002	2.9	THE PART OF THE PA	z	A	12/10/2012
Silvies River Reach Harney County, 2 Unincorporated	Areas	4,903 feet upstream from the confluence with Charlie Creek	6,027 feet south of the intersection of Highway 395 and Silvies Hopper Lane	17120002	40.8		z	A	12/10/2012
Silvies River East Overbank Flow Split	Harney County, Unincorporated Areas	Approximately 2,900 feet downstream of Highway 78	Divergence from Silvies River	17120002	2.3		<b>&gt;</b>	AE	11/30/2021
Silvies River Flow Split To Foley Slough 1	Harney County, Unincorporated Areas	Convergence with Foley Slough	At West Loop Road	17120002	7.0		>	Æ	11/30/2021
Silvies River Flow Split To Foley Slough 1	Hamey County, Unincorporated Areas	At West Loop Road	Divergence from Silvies River	17120002	0.3		Z	4	11/30/2021

Table 2: Flooding Sources Included in this FIS Report (continued)

			מייים ככמי ככ מייסומת או ייווס ו יכן ויכלאון (כסוווווממן)	200	lion) sinday	manin			
Flooding Source	Community	Downstream   mit	medisal	HUC-8 Sub- (streams or Basin's)			Floodway	Zone shown on	Date of
Silvies River Flow Split To Foley Stough 2	Harney County, Unincorporated Areas	Convergence with Foley Stough	At West Loop Road	17120002	0.3		<b>X</b>	AE	11/30/2021
Silvies River Flow Split To Foley Slough 2	Harney County, Unincorporated Areas	At West Loop Road	Divergence from Silvies River	17120002	6.0		Z	4	11/30/2021
Silvies River Flow Split To Foley Slough 3	Hamey County, Unincorporated Areas	Convergence with Foley Slough	At West Loop Road	17120002	9.6		; <b>&gt;</b> -	Æ	11/30/2021
Silvies River Flow Split To Foley Slough 3	Harney County, Unincorporated Areas	At West Loop Road	Divergence from Silvies River	17120002	0.3	The state of the s	Z	4	11/30/2021
Silvies River Flow Split To Foley Slough 4	Harney County, Unincorporated Areas	Convergence with Foley Slough	Divergence from Silvies River	17120002	20		>-	AE	11/30/2021
Trout Creek	Harney County, Unincorporated Areas	At the confluence with the Silvies River	2,820 feet upstream of King Mountain Lookout Road	17120002	10.4		Z	<	12/10/2012
West Fork Silvies River	Натеу County, Unincorporated Areas	Confluence with Matheur Lake	Separation of Silvies River into two forks	17120001, 17120002	33.4		Z	A	06/17/2016

#### 2.2 Floodways

Encroachment on floodplains, such as structures and fill, reduces flood-carrying capacity, increases flood heights and velocities, and increases flood hazards in areas beyond the encroachment itself. One aspect of floodplain management involves balancing the economic gain from floodplain development against the resulting increase in flood hazard.

For purposes of the NFIP, a floodway is used as a tool to assist local communities in balancing floodplain development against increasing flood hazard. With this approach, the area of the 1-percent-annual-chance floodplain on a river is divided into a floodway and a floodway fringe based on hydraulic modeling. The floodway is the channel of a stream, plus any adjacent floodplain areas, that must be kept free of encroachment in order to carry the 1-percent-annual-chance flood. The floodway fringe is the area between the floodway and the 1-percent-annual-chance floodplain boundaries where encroachment is permitted. The floodway must be wide enough so that the floodway fringe could be completely obstructed without increasing the water surface elevation of the 1-percent-annual-chance flood more than 1 foot at any point. Typical relationships between the floodway and the floodway fringe and their significance to floodplain development are shown in Figure 4.

To participate in the NFIP, Federal regulations require communities to limit increases caused by encroachment to 1.0 foot, provided that hazardous velocities are not produced. Regulations for Oregon require communities in Harney County to limit increases caused by encroachment to 1.0 foot and several communities have adopted additional restrictions. The floodways in this project are presented to local agencies as minimum standards that can be adopted directly or that can be used as a basis for additional floodway projects.

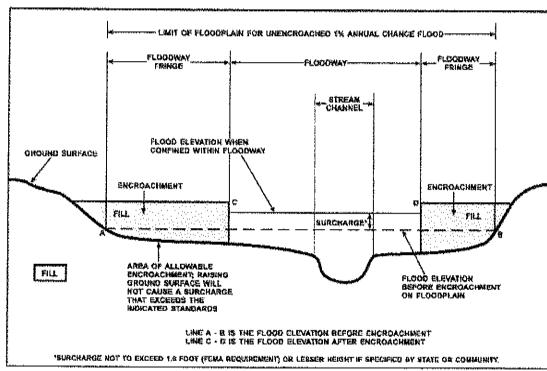


Figure 4: Floodway Schematic

Floodway widths presented in this FIS Report and on the FIRM were computed at cross sections. Between cross sections, the floodway boundaries were interpolated. For certain stream segments, floodways were adjusted so that the amount of floodwaters conveyed on each side of the floodplain would be reduced equally. The results of the floodway computations have been tabulated for selected cross sections and are shown in Table 23, "Floodway Data."

All floodways that were developed for this Flood Risk Project are shown on the FIRM using the symbology described in Figure 3. In cases where the floodway and 1-percent-annual-chance floodplain boundaries are either close together or collinear, only the floodway boundary has been shown on the FIRM. For information about the delineation of floodways on the FIRM, refer to Section 6.3.

## 2.3 Base Flood Elevations

The hydraulic characteristics of flooding sources were analyzed to provide estimates of the elevations of floods of the selected recurrence intervals. The Base Flood Elevation (BFE) is the elevation of the 1-percent-annual-chance flood. These BFEs are most commonly rounded to the whole foot, as shown on the FIRM, but in certain circumstances or locations they may be rounded to 0.1 foot. Cross section lines shown on the FIRM may also be labeled with the BFE rounded to 0.1 foot. Whole-foot BFEs derived from engineering analyses that apply to coastal areas, areas of ponding, or other static areas with little elevation change may also be shown at selected intervals on the FIRM.

BFEs are primarily intended for flood insurance rating purposes. Cross sections with BFEs shown on the FIRM correspond to the cross sections shown in the Floodway Data table and Flood Profiles in this FIS Report. For construction and/or floodplain management purposes, users are cautioned to use the flood elevation data presented in this FIS Report in conjunction with the data shown on the FIRM. For example, the user may use the FIRM to determine the stream station of a location of interest and then use the profile to determine the 1-percent-annual-chance elevation at that location. Because only selected cross sections may be shown on the FIRM for riverine areas, the profile should be used to obtain the flood elevation between mapped cross sections. Additionally, for riverine areas, whole-foot elevations shown on the FIRM may not exactly reflect the elevations derived from the hydraulic analyses; therefore, elevations obtained from the profile may more accurately reflect the results of the hydraulic analysis.

## 2.4 Non-Encroachment Zones

This section is not applicable to this Flood Risk Project.

### 2.5 Coastal Flood Hazard Areas

This section is not applicable to this Flood Risk Project.

#### 2.5.1 Water Elevations and the Effects of Waves

This section is not applicable to this Flood Risk Project.

# Figure 5: Wave Runup Transect Schematic [Not Applicable to this Flood Risk Project]

# 2.5.2 Floodplain Boundaries and BFEs for Coastal Areas

This section is not applicable to this Flood Risk Project.

## 2.5.3 Coastal High Hazard Areas

This section is not applicable to this Flood Risk Project.

# Figure 6: Coastal Transect Schematic [Not Applicable to this Flood Risk Project]

#### 2.5.4 Limit of Moderate Wave Action

This section is not applicable to this Flood Risk Project.

# **SECTION 3.0 – INSURANCE APPLICATIONS**

## 3.1 National Flood Insurance Program Insurance Zones

For flood insurance applications, the FIRM designates flood insurance rate zones as described in Figure 3, "Map Legend for FIRM." Flood insurance zone designations are assigned to flooding sources based on the results of the hydraulic or coastal analyses. Insurance agents use the zones shown on the FIRM and depths and base flood elevations in this FIS Report in conjunction with information on structures and their contents to assign premium rates for flood insurance policies.

The 1-percent-annual-chance floodplain boundary corresponds to the boundary of the areas of special flood hazards (e.g. Zones A, AE, V, VE, etc.), and the 0.2-percent-annual-chance floodplain boundary corresponds to the boundary of areas of additional flood hazards.

Table 3 lists the flood insurance zones in Harney County.

Table 3: Flood Zone Designations by Community

Community	Flood Zone(s)
Burns Paiute Reservation	A, AE, X
Burns, City of	A, AE, X
Harney County, Unincorporated Areas	A, AE, X
Hines, City of	A, AE, X

## **SECTION 4.0 – AREA STUDIED**

### 4.1 Basin Description

Table 4 contains a description of the characteristics of the HUC-8 sub-basins within which each community falls. The table includes the main flooding sources within each basin, a brief description of the basin, and its drainage area.

Table 4: Basin Characteristics

HUC-8 Sub- Basin Name	HUC-8 Sub-Basin Number	Primary Flooding Source	Description of Affected Area	Drainage Area (square miles)
Alvord Lake	17120009	Alvord Lake	Affecting the southeastern corner of Harney County	2,132
Beaver-South Fork	17070303	Beaver-South Fork	Affecting a very small northwest portion of Harney County	1,549
Crooked- Rattlesnake	17050109	Crooked- Rattiesnake	Affecting a very small eastern portion of Harney County	1,337

Table 4: Basin Characteristics (continued)

HUC-8 Sub- Basin Name	HUC-8 Sub-Basin Number	Primary Flooding Source	Description of Affected Area	Drainage Area (square miles)
Donner Und Blitzen	17120003	Donner Und Blitzen	Begins at mouth of Donner Und Blitzen River, extends southeast, affecting a center portion of Harney County	758
Guano	17120008	Guano	Affecting the southwestern corner of Harney County	3,007
Harney- Malheur Lakes	17120001	Harney- Malheur Lakes	A large watershed affecting the center portion of Harney County	1,434
Silver	17120004	Silver	Begins along Buzzard Creek, extends northwest, affecting the northwest corner of Harney County	1,682
Silvies	17120002	Silvies	Begins approximately 8,500 feet upstream from Malheur Lake, extends northwest, affecting one eighth of Harney County	1,320
Summer Lake	17120005	Summer Lake	Affecting a small western portion of Harney County	4,147
Thousand- Virgin	16040205	Thousand- Virgin	Affecting a southern portion of Harney County	1,168
Upper John Day	17070201	Upper John Day	Affecting a very small northwest portion of Harney County	2,136
Upper Malheur	17050116	Upper Malheur	Affecting the northeast corner of Harney County	2,453
Upper Quinn	16040201	Upper Quinn	Affecting a very small southeastern corner of Harney County	3,526
Warner Lakes	17120007	Warner Lakes	Affecting a small southwestern corner of Harney County	1,912

# 4.2 Principal Flood Problems

Table 5 contains a description of the principal flood problems that have been noted for Harney County by flooding source.

Table 5: Principal Flood Problems

Flooding Source	Description of Flood Problems
Brown Canyon/ Drainage F	There are eight distinct drainages in the foothills west and northwest of Burns, Burns Paiute Reservation, and Hines; Brown Canyon is among the most significant. Thunderstorm floods can cause major flood damage to the small, local drainage areas in the foothills. The eight drainages, separately or together, have the potential of flooding a common floodplain between the base of the hills and the Silvies River. Brown Canyon does not have a direct channel across the floodplain to the Silvies River; in addition, the gradients of its meandering ditches are very flat, thereby causing overflow along its route.  There is little information concerning the flood history of this drainage.
Drainages B, C, and D	Flooding occurs regularly in the Burns-Hines area and cannot be viewed separately as isolated phenomenon in either of the jurisdictions. Runoff occurs from the relatively steep mountains immediately west of the City of Hines. Drainages B, C, and D present flooding problems to Hines. A flooding potential ponding area between the cities of Burns and Hines is an area called the Sump, which is a collection point for several of the side-hill drainages.  Besides the runoff flooding that occurs rather regularly in spring, the worst type of flooding event is a major rainstorm combined with warm weather conditions on frozen ground.  The channels that carry the floodwater from Drainages B, C, and D all have separate routes across the higher portion of the floodplain, and each is subject to overflow. There is little information concerning the flood history of these drainages.
Drainages D, E-1, and E-2	There are eight distinct drainages in the foothills west and northwest of Burns, Burns Paiute Reservation, and Hines; Drainages D, E-1, and E-2 are among the most significant. Thunderstorm floods can cause major flood damage to small, local drainage areas in the foothills. Besides the runoff flooding that occurs rather regularly in spring, the worse type of flooding event is a major rainstorm combined with warm weather conditions on frozen ground. The eight drainages, separately or together, have the potential of flooding a common floodplain between the base of the hills and the Silvies River. The channels that carry the floodwater from the drainages all have separate routes across the higher portion of the floodplain, and each is subject to overflow.  There is little information concerning the flood history of these drainages.
Silvies River	Floods on the Silvies River and its tributaries are generally classified as winter floods; spring floods, which result from rapid snowmelt augmented by rainfall; and thunderstorm floods. Spring floods generate both widespread and prolonged flooding of the Silvies River, accounting for most of the annual flood damage. Flooding occurs on the Silvies River because of an inadequate natural channel capacity to contain spring floodflows.  Historical and eyewitness accounts indicate that flooding from the Silvies River spreads out like a fan as it flows southerly and westerly into Malheur Lake. The flooding ranges upward from 20 to 30 miles through the swampy valley floor. During high-water periods, the area appears as a large lake.  Floods of significant size have occurred in 1897, 1904, 1921, 1943, 1952, 1957, 1964, 1983, 1984, 1986, and 2011. The flood of 1897 is the largest known flood on the Silvies River. It occurred before any stream gages were installed. Although little historical data are available, the flood is estimated to have had a flow of approximately 9,000 cubic feet per second (cfs) and an occurrence probability of approximately once in 300 years.

Table 5: Principal Flood Problems (continued)

Flooding Source	Description of Flood Problems
East Harney County Basin	Historical and eyewitness accounts indicate that flooding from the Silvies River spread out like a fan as it flows southerly and westerly into Malheur Lake. The flooding ranges upward from 20 to 30 miles through the swampy valley floor. During high-water periods, the area appears as a large lake.

Table 6 contains information about historic flood elevations in the communities within Harney County.

**Table 6: Historic Flooding Elevations** 

Flooding Source	Location	Historic Peak (Feet NAVD88)	Event Date	Approximate Recurrence Interval (years)	Source of Data
Malheur Lake	3,300 feet east from the intersection of State Highway 78 and S. Newton Road	4,105.5	1986	*	USFWS
Silvies River	18,994 feet upstream of Charlie Creek	4,214.1	1952	•	USGS gage

<sup>\*</sup>Not provided

## 4.3 Dams and Other Flood Hazard Reduction Measures

Table 7 contains information about non-levee flood hazard reduction measures within Harney County such as dams or jettles. Levee systems are addressed in Section 4.4 of this FIS Report.

Table 7: Dams and Other Flood Hazard Reduction Measures
[Not Applicable to this Flood Risk Project]

#### 4.4 Levee Systems

For purposes of the NFIP, FEMA only recognizes levee systems that meet, and continue to meet, minimum design, operation, and maintenance standards that are consistent with comprehensive floodplain management criteria. The Code of Federal Regulations, Title 44, Section 65.10 (44 CFR 65.10) describes the information needed for FEMA to determine if a levee system reduces the flood hazard from the 1-percent-annual-chance flood. This information must be supplied to FEMA by the community or other party when a flood risk study or restudy is conducted, when FIRMs are revised, or upon FEMA request. FEMA reviews the information for the purpose of establishing the appropriate flood hazard zone.

Levee systems that are determined to reduce the hazard from the 1-percent-annualchance flood are accredited by FEMA. FEMA can also grant provisional accreditation to a levee system that was previously accredited on an effective FIRM and for which FEMA is awaiting data and/or documentation to demonstrate compliance with 44 CFR 65.10. These levee systems are referred to as Provisionally Accredited Levees, or PALs. Provisional accreditation provides communities and levee owners with a specified timeframe to obtain the necessary data to confirm the levee system's accreditation status. Accredited levee systems and PALs are shown on the FIRM using the symbology shown in Figure 3. If the required information for a PAL is not submitted within the required timeframe, or if information indicates that a levee system no longer meets 44 CFR 65.10, FEMA will consider the levee system as non-accredited and issue an effective FIRM showing the levee-impacted area as a SFHA or Zone D.

FEMA coordinated with the USACE, the local communities, and other organizations to compile a list of levee systems that exist within Harney County, Table 8 "Levee Systems," lists all accredited levee systems, PALs, and non-accredited levee systems shown on the FIRM for this FIS Report. Other categories of levees may also be included in the table. The Levee ID shown in this table may not match numbers based on other identification systems that were listed in previous FIS Reports. Levee systems identified in the table are displayed on the FIRM with notes to users to indicate their flood hazard mapping status.

Please note that the information presented in Table 8 is subject to change at any time. For that reason, the latest information regarding the levee systems presented in the table may be obtained by accessing the National Levee Database. For additional information, contact the levee owner/sponsor or the local community shown in Table 30.

Levee NLD System Levee Status on Levee Flooding NLD Levee Effective System Owner(s) / Community Source(s) System ID Name FIRM FIRM Panel(s) Sponsor(s) Burns Paiute Reservation; 41025C1406F. Burns, City of; Burns Silvies Non-Harney 41025C1408F 490005000004 Harney Levee River Accredited County County, System Unincorporated Areas

Table 8: Levee Systems

#### SECTION 5.0 - ENGINEERING METHODS

For the flooding sources in the community, standard hydrologic and hydraulic study methods were used to determine the flood hazard data required for this study. Flood events of a magnitude that are expected to be equaled or exceeded at least once on the average during any 10-, 25-, 50-, 100-, or 500-year period (recurrence interval) have been selected as having special significance for floodplain management and for flood insurance rates. These events, commonly termed the 10-, 25-, 50-, 100-, and 500-year floods, have a 10-, 4-, 2-, 1-, and 0.2-percent-annual-chance, respectively, of being equaled or exceeded during any year.

Although the recurrence interval represents the long-term, average period between floods of a specific magnitude, rare floods could occur at short intervals or even within the same year. The risk of experiencing a rare flood increases when periods greater than 1 year are considered. For example, the risk of having a flood that equals or exceeds the 100-year flood (1-percent chance of annual exceedance) during the term of a 30-year mortgage is approximately 26 percent (about 3 in 10); for any 90-year period, the risk increases to approximately 60 percent (6 in 10). The analyses reported herein reflect flooding potentials based on conditions existing in the community at the time of completion of this study. Maps and flood elevations will be amended periodically to reflect future changes.

## 5.1 Hydrologic Analyses

Hydrologic analyses were carried out to establish the peak elevation-frequency relationships for floods of the selected recurrence intervals for each flooding source studied. Hydrologic analyses are typically performed at the watershed level. Depending on factors such as watershed size and shape, land use and urbanization, and natural or man-made storage, various models or methodologies may be applied. A summary of the hydrologic methods applied to develop the discharges used in the hydraulic analyses for each stream is provided in Table 12. Greater detail (including assumptions, analysis, and results) is available in the archived project documentation.

A summary of the discharges is provided in Table 9. Frequency Discharge-Drainage Area Curves used to develop the hydrologic models may also be shown in Figure 7 for selected flooding sources. A summary of stillwater elevations developed for non-coastal flooding sources is provided in Table 10. Stream gage information is provided in Table 11.

Table 9: Summary of Discharges

					Peak Discharge (cfs)	fs)	
		•					0.29%
Flooding Source	Location	Drainage Area (Square Miles)	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance	Annual Chance
Brown Canyon	At outlet of Brown Canyon near Foley Drive	<del>د</del> ر	45	83	108	\$2	347
Cricket Creek	At the confluence with Emigrant Creek.	49	4.	*	**	879	*
Drainage B	50 West of the intersection of S Hilltop Avenue And Howell Street.	1.0	*	*	*	46	*
Drainage D	At outlet of Drainage D Above City of Hines	2.2	7	177	263	383	469
Drainage E	Downstream of confluence with Drainage E-1 And Drainage E-2	<u>o</u>	88	123	157	275	450
Drainage E-1	Above confluence with Drainage E	1.3	49	28	102	212	310
Drainage E-2	Above confluence with Drainage E	9.0	22	36	49	79	138
East Fork Silvies River	Discharge of East Fork Silvies Into Maiheur Lake	91.7	*	*	#	1333	44
East Fork Silvies River	Inflow to East Fork Silvies River	51.9	er en	41	*	1,585	*
East Fork Silvies River	Upstream Most Point East Fork Silvies	29.4	•	*	*	1,163	*
Emigrant Creek	At the confluence with the Silvies River.	259	*	- WESTERNA AND AND AND AND AND AND AND AND AND A	- 4	3,066	*
Hay Creek	At the confluence with Emigrant Creek.	33.4	*	*	*	099	*
Poison Creek	Confluence of Poison Creek into Poison Creek Slough	85.5	*	*	4	2,627	*

\*Not calculated for this Flood Risk Project

Table 9: Summary of Discharges (continued)

		•		,			
		-man-curat		Peak	Peak Discharge (cfs)	(s)	- Control of the Cont
							0.2%
Flooding Source	Location	Drainage Area (Square Miles)	10% Annual Chance	4% Annual Chance	2% Annual Chance	1% Annual Chance	Annual Chance
Poison Creek	16 feet South of the Centerline of Highway 20.	79.9	*	*	*	1,269	*
Poison Creek Slough	Third outlet Poison Creek Slough	89.2	*	*	<b>24</b>	547	*
Poison Creek Slough	First outlet Poison Creek Slough	7.1	*x	<b>4</b> 1	*	283	*
Poison Creek Slough	Second outlet Poison Creek Slough	4,	*	<b>†</b>	**	09	*
Silvies River <sup>1</sup>	At USGS Gage 10393500	934	2,809	3,732	4,453	5,196	7,012
Silvies River Reach 2	4,903 feet Upstream From the confluence with Charlie Creek.	889	*	*	×	4,826	*
Frout Creek	At the confluence with the Silvies River.	58.6	*	*	*	1,006	*
West Fork Silvies River	Discharge of West Fork Silvies River into Malheur Lake	261.3	<b>♣</b>	*	*	6,776	*
West Fork Silvies River	Downstream Location of West Fork Silvies River	254.6	#	ħ	*	6,814	41
West Fork Silvies River	Inflow From Northwest of West Fork Silvies River	234.1	*	*	*	6,832	<b>-</b> **
West Fork Silvies River	Upstream Most Point West Fork Silvies River	83	garante de la companya de la company	*	*	7,133	*

1See Table 12 for information regarding discharges for Foley Slough, Foley Slough Flow Splits and Silvies River Flow Splits \*Not calculated for this Flood Risk Project

# Figure 7: Frequency Discharge-Drainage Area Curves [Not Applicable to this Flood Risk Project]

# Table 10: Summary of Non-Coastal Stillwater Elevations [Not Applicable to this Flood Risk Project]

Table 11: Stream Gage Information used to Determine Discharges

	11 11 11 11 11 11 11 11 11 11 11 11 11	Agency		Drainage	Period o	of Record
Flooding Source	Gage Identifier	that Maintains Gage	Site Name	Area (Square Miles)	From	To
Silvies River Near Burns, OR	10393500	OWRD	OWDR/USGS gage on Silvies River near Burns, OR	934	4/11/2010	5/21/2015
Silvies River Near Burns, OR	10393500	USGS	OWDR/USGS gage on Silvies River near Burns, OR	934	6/1/1903	9/30/2012

## 5.2 Hydraulic Analyses

Analyses of the hydraulic characteristics of flooding from the sources studied were carried out to provide estimates of the elevations of floods of the selected recurrence intervals. Base flood elevations on the FIRM represent the elevations shown on the Flood Profiles and in the Floodway Data tables in the FIS Report. Rounded whole-foot elevations may be shown on the FIRM in coastal areas, areas of ponding, and other areas with static base flood elevations. These whole-foot elevations may not exactly reflect the elevations derived from the hydraulic analyses. Flood elevations shown on the FIRM are primarily intended for flood insurance rating purposes. For construction and/or floodplain management purposes, users are cautioned to use the flood elevation data presented in this FIS Report in conjunction with the data shown on the FIRM. The hydraulic analyses for this FIS were based on unobstructed flow. The flood elevations shown on the profiles are thus considered valid only if hydraulic structures remain unobstructed, operate properly, and do not fail.

For streams for which hydraulic analyses were based on cross sections, locations of selected cross sections are shown on the Flood Profiles (Exhibit 1). For stream segments for which a floodway was computed (Section 6.3), selected cross sections are also listed in Table 23, "Floodway Data."

A summary of the methods used in hydraulic analyses performed for this project is provided in Table 12. Roughness coefficients are provided in Table 13. Roughness

coefficients are values representing the frictional resistance water experiences when passing overland or through a channel. They are used in the calculations to determine water surface elevations. Greater detail (including assumptions, analysis, and results) is available in the archived project documentation.

Table 12: Summary of Hydrologic and Hydraulic Analyses

			•	,			
Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Brown Carlyon	Confluence with Silvies River	Approximately 6,200 feet upstream of Foley Drive	HEC-HMS version 4.6.1 (USACE 2020) HEC-RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	AE	Discharges were computed using 2D rain-on-grid methodologies applying excess rainfall from HEC-HMS into a HEC-RAS model. Stream was modeled hydraulically using 2D methodologies. Profiles were not produced. Areas with average depths less than 1-foot are mapped as Zone X (shaded). A reach of this stream was named 'Drainage F' in previous FIS versions.
Cricket Creek	At the confluence with Emigrant Creek	61 feet southwest of centerline of Hines Logging Road	Regression Equations	HEC-RAS 3.1.1 and up	12/10/2012	4	
Drainage B	Approximately 50 feet west of the intersection of South Hilltop Avenue and Howell Street	Approximately 1,465 feet upstream of outlet	Regression Equations	HEC-RAS 3.1.1 and up	12/10/2012	A/X (Shaded)	
Drainage C	Highway 20	N Section Avenue	Other	Other	1982	A/X (Shaded)	Zone A delineations within Harney County Unincorporated Areas were maintained from prior FIS versions.

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

i able 12. Summary of nyarologic and ryoraulic Analyses (continued)	Study Limits Study Limits Model or Model or Downstream Limit Upstream Limit Method Used Completed FIRM Special Considerations	HEC-HMS version 4.6.1 Hiker/Biker Trail Approximately Lagoon Avenue HEC-RAS (USACE Avenue Avenue HEC-RAS (USACE Avenue  Avenue  HEC-RAS (USACE Avenue  (USACE Avenue (USACE 2019)  HEC RAS (USACE Avenue Avenue  HEC RAS (USACE Avenue Avenue  (USACE 2019)  Discharges were computed using 2D rain-on-grld methodologies applying excess rainfall from HEC-HMS into a HEC-RAS model. Drainages D, E, E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as 2019)  Produced.	HEC-HMS version 4.6.1 Confluence with Drainage E-2 version 5.0.7 USACE Drainage E-2 version 5.0.7 Confluence with Drainage E-1 and HEC-RAS Confluence with Drainage E-2 version 5.0.7 Confluence with Drainage E-1 and HEC-RAS Confluence with Drainage E-2 version 5.0.7 Confluence with Drainage E-1 and HEC-RAS model. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Area E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-2 version 5.0.7 Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-2 version 5.0.7 Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies. Confluence with Drainage E-1 and E-2 were assessed in a single hydraulic model with a sing	HEC-HMS version 4.6.1 Approximately Confluence with upstream of W Monroe Street (USACE Drain-on-grid methodologies 2020) Version 5.0.7  Monroe Street (USACE Drain-on-grid methodologies 2020) Version 5.0.7  Monroe Street (USACE Monroe Street (USACE Monroe Street (USACE Monroe Street 2019)  Discharges were computed using 2D rain-on-grid methodologies 2020) Version 5.0.7  AE Approximately (USACE Monroe Street (USACE Monroe Street (USACE (USACE Monroe Street 2019)  AE Approximately (USACE Monroe Street Approximately (USACE (USACE Monroe Street Approximately (USACE (USACE Monroe Street Approximately (USACE (USACE Approximately (USACE (USACE Approximately Approximately Approximately (USACE Approximately Approxima
	Study Limits Downstream L	Hiker/Biker Tra near Sewage Lagoon	Confluence with	Confluence with

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

			and a second of the second in the second sec	Acade and repo	tioning of the state of the sta	mison) poe	
Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Drainage E-2	Confluence with Drainage E	Approximately 4,300 feet upstream of confluence with Drainage E	HEC-HMS version 4.6.1 (USACE 2020) HEC-RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	AE	Discharges were computed using 2D rain-on-grid methodologies applying excess rainfall from HEC-HMS into a HEC-RAS model.  Drainages D, E, E-1 and E-2 were assessed in a single hydraulic model using 2D methodologies.  Profiles were not produced. Areas with average depths less than 1-foot are mapped as Zone X (shaded).
Drainage H	Confluence with Miller Canyon	Approximately 2,000 feet upstream of Pasigo Street	HEC-HMS version 4.6.1 (USACE 2020) HEC-RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	٧	Discharges were computed using 2D rain-on-grid methodologies applying excess rainfall from HEC-HMS into a HEC-RAS model. Brown Canyon and Drainage H were assessed in a single hydraulic model using 2D methodologies. Profiles were not produced. Areas with average depths less than 1-foot are mapped as Zone X (shaded).
East Fork Silvies River	Confluence with Maiheur Lake	Separation of Silvies River into two forks	HEC-HMS 3.0 and up (Dec 2005)	FLO-2D v. 2007.06 and 2009.06	06/17/2016	∢	Effects of hydraulic structures were not considered in the models.
East Harney County Basin	Area east of City of Burns and north of Malheur Lake	Area east of City of Burns and north of Malheur Lake	HEC-HMS version 4.3	HEC-RAS 5.0.7 (USACE 2019)	10/15/2020	∢	Rain-on-grid methodologies were used to transform rainfall into overland flooding.

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( ) ( )	Special Considerations		USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded).	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded), Profiles were not produced.
minal and	Flood Zone on FIRM	¥	AE w/ Floodway	¥	AE w/ Floodway
	Date Analyses Completed	12/10/2012	11/30/2021	11/30/2021	11/30/2021
	Hydraulic Model or Method Used	HEC-RAS 3.1.1 and up	HEC RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)
from mice) coefing to the first of the first	Hydrologic Model or Method Used	Regression Equations	HEC-SSP version 2.1.1 (USACE 2017)	HEC-SSP version 2.1.1 (USACE 2017)	HEC-SSP version 2.1.1 (USACE 2017)
	Study Limits Upstream Limit	1,943 feet upstream of the confluence with Little Emigrant Creek	At West Loop Road	Divergence from Silvies River	Divergence from Foley Stough
olits ence es		At Fry Road	At West Loop Road	Convergence with Silvies River East Overbank Flow Split	
	Flooding Source	Emigrant Creek	Foley Stough	Foley Slough	Foley Slough Flow Split 1

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

green and a second				
Special Considerations	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.
Flood Zone on FIRM	AE w/ Floodway	AE w/ Floodway	AE w/ Floodway	AE w/ Floodway
Date Analyses Completed	11/30/2021	11/30/2021	11/30/2021	11/30/2021
Hydraulic Model or Method Used	HEC RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7(USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)
Hydrologic Model or Method Used	HEC-SSP version 2.1.1 (USACE 2017)	HEC-SSP version 2.1.1 (USACE 2017)	HEC-SSP version 2.1.1(USACE 2017)	HEC-SSP version 2.1.1 (USACE 2017)
Study Limits Upstream Limit	Divergence from Foley Slough	Divergence from Foley Slough Flow Split 1	Divergence from Foley Slough Flow Split 2	Divergence from Foley Slough
Study Limits Downstream Limit	Convergence with Foley Slough Flow Split 1	Convergence with Foley Slough Flow Split 1	Convergence with Foley Skough Flow Split 3	Convergence with Silvies River
Flooding Source	Foley Slough Flow Split 2	Foley Slough Flow Split 3	Foley Slough Flow Split 4	Foley Slough Flow To Silvies River

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

				,	· · · · · · · · · · · · · · · · · · ·		
Flooding	Study Limits Downstream Limit	Study Limits	Hydrologic Model or	Hydraulic Model or	Date Analyses	Flood Zone on	
Hay Creek	At the confluence with Emigrant Creek	4,846 feet upstream of the confluence with West Fork Hay Creek	Regression Equations	HEC-RAS 3.1.1 and up	12/10/2012	A	
Maiheur River	in the vicinity of Drewsey	In the vicinity of Drewsey	Other	Other	1982	Æ	Approximate flood elevations along the Malheur River at Drewsey were developed using normal-depth calculations. The 100-year approximate flood plain boundary was developed from aerial photographs (USACE, 1979b).
Miller Canyon	Confluence with Silvies River	Approximately 4,600 feet upstream of Radar Lane	HEC-HMS version 4.6.1 (USACE 2020) HEC-RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	A	Discharges were computed using 2D rain-on-grid methodologies applying excess rainfall from HEC-HMS into a HEC-RAS model. Miller Canyon and Drainage H were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded).
Poison Creek	Confluence with Poison Creek Slough at Highway 20	Approximately 8,600 feet north of Highway 20	HEC-HMS 3.0 and up (Dec 2005)	FLO-2D v. 2007.06 and 2009.06	06/17/2016	Ą	Effects of hydraulic structures were not considered in the models.
Poison Creek	Approximately 4,200 feet north of Highway 20	Approximately 200 feet east of Highway 395	HEC-HMS 3.0 and up (Dec 2005)	FLO-2D v. 2007.06 and 2009.06	06/17/2016	Ą	Effects of hydraulic structures were not considered in the models.

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

	Special Considerations		USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Stough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded).
	Flood Zone on FIRM	¥	AE w/ Floodway	AE w/ Floodway	∢
•	Date Analyses Completed	12/10/2012	11/30/2021	11/30/2021	11/30/2021
	Hydraulic Model or Method Used	HEC-RAS 3.1.1 and up	HEC RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)	HEC RAS version 5.0.7 (USACE 2019)
	Hydrologic Model or Method Used	Regression Equations	HEC-SSP version 2.1.1 (USACE 2017)	HEC-SSP version 2.1.1 (USACE 2017)	HEC-SSP version 2.1.1 (USACE 2017)
	Study Limits Upstream Limit	6,027 feet south of the intersection of Highway 395 and Silvies Hopper Lane	Divergence from Silvies River	At West Loop Road	Divergence from Silvies River
	Study Limits Downstream Limit	4,903 feet upstream from the confluence with Charlie Creek	Approximately 2,900 feet downstream of Highway 78	Convergence with Foley Slough	At West Loop Road
	Flooding Source	Silvies River Reach 2	Silvies River East Overbank Flow Spilt	Silvies River Flow Split To Foley Slough 1	Silvies River Flow Split To Foley Slough 1

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

					•	•	•
Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Silvies River Flow Spilt To Foley Slough 2	Convergence with Foley Slough	At West Loop Road	HEC-SSP version 2.1.1 (USACE 2017)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	AE w/ Floodway	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.
Silvies River Flow Split To Foley Slough 2	At West Loop Road	Divergence from Silvies River	HEC-SSP version 2.1.1 (USACE 2017)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	∢	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraujic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded).
Silvies River Flow Split To Foley Slough 3	Convergence with Foley Slough	At West Loop Road	HEC-SSP version 2.1.1 (USACE 2017)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	AE w/ Floodway	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.
Silvies River Flow Split To Foley Slough 3	At West Loop Road	Divergence from Silvies River	HEC-SSP version 2.1.1 (USACE 2017)	HEC RAS version 5.0.7 (USACE 2019)	11/30/2021	٧	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a single hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded).

Table 12: Summary of Hydrologic and Hydraulic Analyses (continued)

				(manusca) castinus amanatu nua aise ne fe e e	francis i albania	מבי להבנונוו	
Flooding Source	Study Limits Downstream Limit	Study Limits Upstream Limit	Hydrologic Model or Method Used	Hydraulic Model or Method Used	Date Analyses Completed	Flood Zone on FIRM	Special Considerations
Silvies River Flow Split To Foley Slough 4	Convergence with Foley Slough	Divergence from Silvies River	HEC-SSP version 2.1.1(USACE 2017)	HEC RAS version 5.0.7(USACE 2019)	11/30/2021	AE w/ Floodway	USGS stream gage 10393500 was used in the hydrologic analyses. All Silvies River and Foley Slough reaches were assessed in a slngle hydraulic model using 2D methodologies. Areas with average depths less than 1-foot are mapped as Zone X (shaded). Profiles were not produced.
Trout Creek	At the confluence with the Silvies River	2,820 feet upstream of King Mountain Lookout Road	Regression Equations	HEC-RAS 3.1.1 and up	12/10/2012	Ą	
West Fork Silvies River	Confluence with Malheur Lake	Separation of Silvies River into two forks	HEC-HMS 3.0 and up (Dec 2005)	FLO-2D v. 2007.06 and 2009.06	06/17/2016	A	Effects of hydraulic structures were not considered in the models.

**Table 13: Roughness Coefficients** 

Flooding Source	Channel "n"	Overbank "n"
Brown Canyon	0.040	0.030 - 0.120
Cricket Creek	0.040	0.040
Drainage B	0.040	0.040
Drainage D	0.040	0.030 - 0.120
Drainage E	0.040	0.030 - 0.120
Drainage E-1	0.040	0.030 - 0.120
Drainage E-2	0.040	0.030 - 0.120
Drainage H	0.040	0.030 - 0.120
East Fork Silvies River	N/A	0.030 - 0.100
Emigrant Creek	0.040	0.040
Foley Slough	0.040	0.030 - 0.120
Foley Slough Flow Split 1	N/A	0.030 - 0.120
Foley Slough Flow Split 2	N/A	0.030 - 0.120
Foley Slough Flow Split 3	N/A	0.030 - 0.120
Foley Slough Flow Split 4	N/A	0.030 - 0.120
Foley Slough Flow To Silvies River	N/A	0.030 - 0.120
Hay Creek	0.040	0.040
Miller Canyon	0.040	0.030 - 0.120
Poison Creek Segment 1	N/A	0.030 - 0.100
Poison Creek Segment 2	N/A	0.030 - 0.100
Poison Creek Slough	N/A	0.030 - 0.100
Silvies River	0.025 - 0.055	0.030 - 0.120
Silvies River East Overbank Flow Split	N/A	0.030 - 0.120
Silvies River Flow Split To Foley Slough 1	N/A	0.030 - 0.120
Silvies River Flow Split To Foley Slough 2	N/A	0.030 - 0.120
Silvies River Flow Split To Foley Slough 3	N/A	0.030 - 0.120
Silvies River Flow Split To Foley Slough 4	N/A	0.030 - 0.120
Trout Creek	0.040	0.040
West Fork Silvies River	N/A	0.030 - 0.100

## 5.3 Coastal Analyses

This section is not applicable to this Flood Risk Project.

Table 14: Summary of Coastal Analyses [Not Applicable to this Flood Risk Project]

#### 5.3.1 Total Stillwater Elevations

This section is not applicable to this Flood Risk Project.

# Figure 8: 1-Percent-Annual-Chance Total Stillwater Elevations for Coastal Areas [Not Applicable to this Flood Risk Project]

Table 15: Tide Gage Analysis Specifics [Not Applicable to this Flood Risk Project]

### 5.3.2 Waves

This section is not applicable to this Flood Risk Project.

#### 5.3.3 Coastal Erosion

This section is not applicable to this Flood Risk Project.

# 5.3.4 Wave Hazard Analyses

This section is not applicable to this Flood Risk Project.

Table 16: Coastal Transect Parameters
[Not Applicable to this Flood Risk Project]

Figure 9: Transect Location Map
[Not applicable to this Flood Risk Project]

### 5.4 Alluvial Fan Analyses

This section is not applicable to this Flood Risk Project.

Table 17: Summary of Alluvial Fan Analyses
[Not Applicable to this Flood Risk Project]

# Table 18: Results of Alluvial Fan Analyses [Not Applicable to this Flood Risk Project]

## **SECTION 6.0 – MAPPING METHODS**

#### 6.1 Vertical and Horizontal Control

All FIS Reports and FIRMs are referenced to a specific vertical datum. The vertical datum provides a starting point against which flood, ground, and structure elevations can be referenced and compared. Until recently, the standard vertical datum used for newly created or revised FIS Reports and FIRMs was the National Geodetic Vertical Datum of 1929 (NGVD29). With the completion of the North American Vertical Datum of 1988 (NAVD88), many FIS Reports and FIRMs are now prepared using NAVD88 as the referenced vertical datum.

Flood elevations shown in this FIS Report and on the FIRMs are referenced to NAVD88. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between NGVD29 and NAVD88 or other datum conversion, visit the National Geodetic Survey website at <a href="https://www.ngs.noaa.gov">www.ngs.noaa.gov</a>.

Temporary vertical monuments are often established during the preparation of a flood hazard analysis for the purpose of establishing local vertical control. Although these monuments are not shown on the FIRM, they may be found in the archived project documentation associated with the FIS Report and the FIRMs for this community. Interested individuals may contact FEMA to access these data.

To obtain current elevation, description, and/or location information for benchmarks in the area, please visit the NGS website at <a href="https://www.ngs.noaa.gov">www.ngs.noaa.gov</a>.

The datum conversion locations and values that were calculated for Harney County are provided in Table 19.

# Table 19: Countywide Vertical Datum Conversion [Not applicable to this Flood Risk Project]

A countywide conversion factor could not be generated for Harney County because the maximum variance from average exceeds 0.25 feet. Calculations for the vertical offsets on a stream by stream basis are depicted in Table 20.

Table 20: Stream-Based Vertical Datum Conversion

Flooding Source	Average Vertical Datum Conversion Factor (feet)
Brown Canyon	. 3.920
Drainage D	3.946
Drainage D Split to King Avenue	3.940
Drainage E-1	3.928
Drainage E-2	3.928
Drainage F	3,940
Silvies River	3.891

## 6.2 Base Map

The FIRMs and FIS Report for this project have been produced in a digital format. The flood hazard information was converted to a Geographic Information System (GIS) format that meets FEMA's FIRM Database specifications and geographic information standards. This information is provided in a digital format so that it can be incorporated into a local GIS and be accessed more easily by the community. The FIRM Database includes most of the tabular information contained in the FIS Report in such a way that the data can be associated with pertinent spatial features. For example, the information contained in the Floodway Data table and Flood Profiles can be linked to the cross sections that are shown on the FIRMs. Additional information about the FIRM Database and its contents can be found in FEMA's Guidelines and Standards for Flood Risk Analysis and Mapping, www.fema.gov/flood-maps/guidance-partners/guidelines-standards.

Base map information shown on the FIRM was derived from the sources described in Table 21.

Table 21: Base Map Sources

Data Type	Data Provider	Data Date	Data Scale	Data Description
2011 Silvies River High Water Marks	U.S. Army Corps of Engineers	2011		Spatial attributes and features contributing to High Water Marks. (USACE, 2011)
911 Emergency Transportation Layer (Geosolve)	Harney County, Oregon	2011	1:24,000	Spatial and attribute information for roads. (GEOSOLVE, 2011)
911 Emergency Transportation Layer (Harney County)	Harney County, Oregon	2013	1:24,000	Spatial and attribute information for roads (HARNEY COUNTY, 2013b)

Table 21: Base Map Sources (continued)

ſ				up-naamuuvuvuvu araamuu
Data Type	Data Provider	Data Date	Data Scale	Data Description
911 Emergency Transportation Layer (Harney County)	Harney County, Oregon	2021	1:6,000	Spatial and attribute information for roads (HARNEY COUNTY, 2021b)
Aerial Photograph Burns Paiute indian Reservation, Scale 1:4,800	U.S. Army Corps of Engineers	1975	1:4,800	Aerial photo used in delineating flood plain boundaries (USACE, 1975)
Aerial Photograph, Scale 1:2,400, Flown September 11, 1979	U.S. Army Corps of Engineers	1979	1:2,400	Aerial photo used in delineating flood plain boundaries (USACE, 1979a)
Aerial Photographs, City of Burns, Scale 1:6,000, Flown November 8, 1979	U.S. Army Corps of Engineers	1979	1:6,000	Aerial photo used in delineating flood plain boundaries (USACE, 1979b)
Aerial Photos, Scale 1:12,000	U.S. Army Corps of Engineers	1979	1:12,000	Aerial photo used in delineating flood plain boundaries (USACE, 1979c)
Airport Tarmacs Digitized On Lidar Collected in 2011	Oregon Department of Geology and Mineral Industries	2012	1:2,500	Spatial and attribute information for roads (DOGAMI, 2012)
Datum Conversions Derived from Lidar Collected in 2011	Oregon Department of Geology and Minerat Industries	2011		Spatial and attribute information for points used to determine datum conversion factors (DOGAMI, 2011)
DOGAMI DFIRM Task	Oregon Department of Geology and Mineral Industries	2016	1:24,000	Spatial and attribute information for FIRM panels (DOGAMI, 2016a)
Harney County Basemap Submittal	Federal Emergency Management Agency	2016	W 100 100 100 100 100 100 100 100 100 10	Basemap submittal for Harney County (DOGAMI, 2016b)
Harney County City and Reservation Limits	Harney County, Oregon	2021	1:6,000	Spatial and attribute information for municipal and reservation boundaries (HARNEY COUNTY, 2021c)

Table 21: Base Map Sources (continued)

		•		
Data Type	Data Provider	Data Date	Data Scale	Data Description
Harney County City Limits	Harney County, Oregon	2013	1:24,000	Spatial and attribute information for municipal boundaries (HARNEY COUNTY, 2013a)
Harney County Water Lines	Harney County, Oregon	2021	1:6,000	Spatial and attribute information for streams (HARNEY COUNTY, 2021b)
NHD Data	United States Geological Survey	2020	1:24,000	Spatial and attribute information for lakes, reservoirs, and creeks (USGS, 2020)
Oregon/Washington Surface Management Ownership	Bureau of Land Management	2011	1:24,000	Spatial and attribute information for county boundaries (BLM, 2011a)
Pacific Northwest Hydrography Framework	U.S. Geological Survey	2011	1:24,000	Spatial and attribute information for lakes, reservoirs, and creeks (USGS, 2011)
Public Land Survey System from BLM Geographic Coordinate Database	Bureau of Land Management	2011	1:24,000	Spatial and attribute information for PLSS data on FIRM panels (BLM, 2011b)
Streams Digitized from Lidar Collected in 2011 and 2015 and 2011 NAIP Imagery	Oregon Department of Geology and Mineral Industries	2015	1:2,500	Spatial and attribute information for lakes and ponds (DOGAMI, 2015b)
USDA-FPAC-BC Digital Ortho Mosaic for FIRM panels dated April 22, 2022	U.S. Department of Agriculture- Farm Service Agency	2016	1 Meter	NAIP basemap orthoimagery and spatial and attribute information for raster base map tile index (USDA, 2016)
USGS National Map: Orthoimagery for FIRM panels dated February 8, 2024	United States Geological Survey National Map	2020*	Not Provided	Orthorectified digital aerial photographs and satellite images of 1-meter (m) pixel resolution or finer (USGS National Map)

<sup>\*</sup>Most recently refreshed data

Table 21: Base Map Sources (continued)

Data Type	Data Provider	Data Date	Data Scale	Data Description
Water Bodies Digitized from Lidar Collected in 2011 and 2015 and 2011 NAIP Imagery	Oregon Department of Geology and Mineral Industries	2015	1:2,500	Spatial and attribute information for lakes and ponds (DOGAMI, 2015a)

## 6.3 Floodplain and Floodway Delineation

The FIRM shows tints, screens, and symbols to indicate floodplains and floodways as well as the locations of selected cross sections used in the hydraulic analyses and floodway computations.

For riverine flooding sources studied with 1D analysis, the mapped floodplain boundaries shown on the FIRM have been delineated using the flood elevations determined at each cross section; between cross sections, the boundaries were interpolated using the topographic elevation data described in Table 22. For riverine flooding sources studied with 2D analysis, the mapped floodplain boundaries shown on the FIRM have been delineated using the mesh developed during the hydraulic tasks.

In cases where the 1- and 0.2-percent-annual-chance floodplain boundaries are close together, only the 1-percent-annual-chance floodplain boundary has been shown. Small areas within the floodplain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data.

The floodway widths presented in this FIS Report and on the FIRM were computed for certain stream segments on the basis of equal conveyance reduction from each side of the floodplain. Floodway widths were computed at cross sections. Between cross sections, the floodway boundaries were interpolated. Table 2 indicates the flooding sources for which floodways have been determined. The results of the floodway computations for those flooding sources have been tabulated for selected cross sections and are shown in Table 23, "Floodway Data."

Table 22: Summary of Topographic Elevation Data used in Mapping

100 100° 10 10 10 10 10 10 10 10 10 10 10 10 10		Source	for Topogra	ohic Elevation	Data
Community	Flooding Source	Description	Vertical Accuracy	Horizontal Accuracy	Citation
Burns Paiute Reservation; Burns, City of; Harney County; Hines, City of	Cricket Creek, Brown Canyon, Drainage B (Zone A), Drainage D, Drainage E, Drainage E-1, Drainage E-2, Drainage H, East Fork Silvies River, Emigrant Creek, Foley Slough, Foley Slough Flow Split 1, Foley Slough Flow Split 2, Foley Slough Flow Split 3, Foley Slough Flow Split 4, Foley Slough Flow To Silvies River, Hay Creek, Miller Canyon, Poison Creek, Poison Creek Slough, Silvies River, Silvies River East Overbank Flow Split To Foley Slough 1, Silvies River Flow Split To Foley Slough 2, Silvies River Flow Split To Foley Slough 3, Silvies River Flow Split To Foley Slough 4, Trout Creek, West Fork Silvies River	2015 LIDAR, 2011 LIDAR, and 10m DEM mosaic	0.06m RMSE	*	DOGAMI, 2015c
Harney County, Unincorporated Areas; Hines, City of	Drainage B (Zone X [Shaded]) and Drainage C	7.5-Minute Series Topographic Map, Scale 1:24,000, Contour Interval 20 feet	1.85 m RMSE	+/- 40 ft at 90% confidence	USGS, 1960b

<sup>\*</sup>Not provided

BFEs shown at cross sections on the FIRM represent the 1-percent-annual-chance water surface elevations shown on the Flood Profiles and in the Floodway Data tables in the FIS Report. Rounded whole-foot elevations may be shown on the FIRM in areas of ponding and other areas with static base flood elevations.

SIC			FLOODWAY		1% ANNU	1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	.OOD WATER S EET NAVD88)	URFACE
	DISTANCE1	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/ SECOND)	REGULATORY	WITHOUT	WITH	INCREASE
	687	263	2.521	1,6	4.158.4	4 158 4	4 158 8	70
7	1,155	104	1,050	2.3	4,158.8	4,158.8	4,159.5	0.7
V VI	2,139	262	2,733	2.1	4,159.6	4,159,6	4,160,4	8.0
	2,570	215	2,342	2.0	4,160.0	4,160.0	4,160.9	6.0
	2,723	237	2,538	1.9	4,160.2	4,160.2	4,161.0	0.8
	3,229	220	2,520	<u>.</u> .	4,160.9	4,160.9	4,161.7	8.0
	3,826	321	3,637	9,5	4,162.0	4,162.0	4,162.7	0.7
٧-	4,853	173	2,217	2.0	4,163.0	4,163.0	4,163.6	0.6
	5,581	229	2,640	2.2	4,164.0	4,164.0	4,164.5	0.5
	3,583	364	4,099	ব	4,164.6	4,164.6	4,165.2	9.0
	9,092	688	6,235	ć.	4,165.9	4,165.9	4,166.5	0.6
	9,778	667	5,646	2.6	4,166.4	4,166.4	4,167.0	0.6
	10,395	617	5,176	ō,	4,167.0	4,167.0	4,167.9	0.9
<b>*</b>	10,875	1,474	11,732	<u>ئ</u>	4,167.5	4,167.5	4,168.4	6.0
	11,089	1,872	14,764	ļ~.	4,167.9	4,167.9	4,168.6	0.7
•	12,424	695	5,826	33.	4,168.9	4,168.9	4,169.6	0.7
<b>*</b>	13,255	511	5,839	<u>,,</u>	4,172.0	4,172.0	4,172.9	0.9
••••	14,199	978	1,041	<del></del>	4,172.2	4,172.2	4,173.1	6.0
•	14,857	1,155	12,542	<u>,,</u>	4,172.4	4,172.4	4,173.2	0.8
	15,494	1364	14,782	<b>,</b>	4,172.6	4,172.6	4,173.3	0.7
-	16,997	1294	13,141	Ţ.	4,172.8	4,172.8	4,173.4	0.6
****	17,552	1088	10,807	<u>t.</u>	4,173.0	4,173.0	4,173.6	0.6
	17,949	942	9,407	9.1	4,173.2	4,173.2	4,173.7	0.5
	18,324	843	8,487	1,9	4,173.4	4,173.4	4,174.0	9.0

<sup>&#</sup>x27;Feet above Fry Road

Ploodway computed by 2D or hybrid 1D/2D model at this location

FLOODWAY DATA	FLOODING SOURCE: FOLEY SLOUGH	
FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY,	OREGON AND INCORPORATED AREAS	
TAB	LE 23	

Table 23: Floodway Data (continued)

				, , , , , ,	
URFACE	INCREASE	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0			нэпот
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH	4,174.2 4,174.4 4,174.8 4,175.1 4,177.7 4,178.2 4,178.2		FLOODWAY DATA	FLOODING SOURCE: FOLEY SLOUGH
JAL CHANCE FI ELEVATION (F	WITHOUT FLOODWAY	4,173.6 4,174.0 4,174.2 4,174.4 4,176.9 4,177.4 4,177.5		FLOOD	ODING SOUR
1% ANNE	REGULATORY	4,173.6 4,174.0 4,174.0 4,174.4 4,177.4 4,177.5			FLO
	MEAN VELOCITY (FEET/ SECOND)	0.0.00.00.00.00.00.00.00.00.00.00.00.00		<u></u> .	
FLOODWAY	SECTION AREA (SQ. FEET)	8,699 8,371 7,305 6,787 2,343 2,618 1,680	model at this location	IENT AGENC f,	EAS
	WIDTH (FEET)	856 823 775 705 656 225 231 244 142		Y COUNTY,	OREGON AND INCORPORATED AREAS
NOI	DISTANCE <sup>1</sup>	18,649 19,070 19,296 19,678 22,403 23,021 23,106	đ 1 by 2D or hybrid	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY,	OR AND INCOR
LOCATION	CROSS SECTION <sup>2</sup>	> 2 & & & & & & & & & & & & & & & & & &	¹ Feet above Fry Road ² Floodway computed by 2D or hybrid 1D/2D	FEDERA	
•				TAB	LE 23

				•	•	•									<del></del>	<del>•</del>	·····						 	
URFACE	INCREASE	2.0	0.7	0.4	0.4	0.4	0.4	0.4	0.4	0.3	0.5	9.0	9.0	9.0	0.5	9.0	9.0	7.0	8.0	6.8	0.8	0.7	 	
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH	4 (53.9	4,154.1	4,154.4	4,154.8	4,155.3	4,156.3	4,156.9	4,157.2	4,157.5	4,157.9	4,158.2	4,158.4	4,158.8	4,159.6	4,160.3	4,163.0	4,163.1	4,163.4	4,163.7	4,164.8	4,165.3		
JAL CHANCE FLOOD WATER ELEVATION (FEET NAVD88)	WITHOUT FLOODWAY	4 153 2	4,153.4	4,154.0	4,154.4	4,154.9	4,155.9	4,156.5	4,156.8	4,157.2	4,157.4	4,157.6	4,157.8	4,158.2	4,159.1	4,159.7	4,162.4	4,162.4	4,162.6	4,162.9	4,164.0	4,164.6		
1% annu	REGULATORY	4 153 2	4,153,4	4,154.0	4,154.4	4,154.9	4,155.9	4,156.5	4,156.8	4,157.2	4,157.4	4,157.6	4,157.8	4,158.2	4,159.1	4,159.7	4,162.4	4,162.4	4,162.6	4,162.9	4,164.0	4,164.6		
	MEAN VELOCITY (FEET/ SECOND)	0.0	8.0	Ţ.	1.2	1,4	1.3	1.6	<u>"</u>	4.	2.0	€.	φ.	7.	2.5	8.	1.9	1.2	2.0	2.7	2.4	2.2		#
FLOODWAY	SECTION AREA (SQ. FEET)	3.258	3,691	3,794	4,601	4,376	4,007	2,986	3,705	3,651	2,171	2,226	1,286	2,715	2,431	2,114	1,294	1,221	1,188	599	1,194	994		East Overbank Flow Split
<b>U.</b> .	WIDTH (FEET)	1 238	1,636	1,491	1,543	1,312	1,155	686	835	734	401	392	224	455	348	285	168	157	161	87	163	133		
NOI	DISTANCE1	030	1.420	2,882	3,181	4,094	4,848	5,477	5,772	6,345	6,636	6,891	7 139	8,005	8,397	8,874	9,088	9,354	10,791	11,183	11,857	12,461	 	gence with Silvies
LOCATION	CROSS SECTION <sup>2</sup>	٧	( 100	O	۵	m	11	တ	<b>=</b>		7	*		Ä	_	0	α	ø	~	တ	<b> </b>	<b>_</b>	 	Feet above convergence with Silvies River

Peet above convergence with Silvies River East Overbank How Split Proodway computed by 2D or hybrid 1D/2D model at this location

TABLE 23

AND INCORPORATED AREAS

FOLEY SL	FLOODING SOURCE:	FOLEY SLOUGH FLOW SPLIT 1
----------	------------------	---------------------------

FLOODWAY DATA

FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY, OREGON

Table 23: Floodway Data (continued)

				, , , , , , , , , , , , , , , , , , ,		
URFACE	INCREASE	0.5 0.7 0.6 0.0 7.0 0.7 0.8 0.8			117.2	7
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH FLOODWAY	4,154.5 4,155.0 4,155.6 4,156.7 4,156.9 4,156.9 4,159.4 4,159.4		FLOODWAY DATA	FLOODING SOURCE:	10110
AL CHANCE FLOOD WATER ELEVATION (FEET NAVD88)	WITHOUT	4, 154.0 4, 155.0 4, 155.0 4, 156.0 4, 156.0 4, 158.0 6, 158.0 6, 158.0	and	FLOOD	FLOODIN	OFF.1 9500
1% ANNU	REGULATORY	4, 4, 4, 4, 4, 154.0 4, 156.0 6, 156.0 6, 156.0 6, 156.0 7, 156.0 8, 156.0 8, 156.0 8, 156.0				
	MEAN VELOCITY (FEET/ SECOND)	1. 1. 2. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0.		<b>*</b>		
FLOODWAY	SECTION AREA (SQ. FEET)	462 343 297 472 812 525 525 368 368	Flow Split 1 model at this location	IENT AGENC Y.	, u	ERO
<b>L</b>	WIDTH (FEET)	246 233 203 316 268 195 123	Slough Flow Spil 1D/2D model at	MERGENCY MANAGEMEI HARNEY COUNTY.	OREGON OND INCORPORATED APERS	POKA JED AK
NO	DISTANCE1	1,376 1,942 2,257 2,862 3,867 4,380 4,994 5,841 6,838 7,244	gence with Foley d by 2D or hybrid	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY.	AO CAN CHAN	AND INCOR
LOCATION	CROSS SECTION <sup>2</sup>	∢в∪ошцот— ¬	Feet above convergence with Foley Stough Flow Split 1 Floodway computed by 2D or hybrid 1D/2D model at th	FEDERA		
				TAE	3LE 23	3

Table 23: Floodway Data (continued)

	1. 11. 11				
URFACE	INCREASE	0.2 0.5 0.7			LIT 3
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH FLOODWAY	4,157.3 4,158.5 4,158.5 7,159.7		FLOODWAY DATA	FLOODING SOURCE: FOLEY SLOUGH FLOW SPLIT 3
JAL CHANCE FLOOD WATER ELEVATION (FEET NAVD88)	WITHOUT	4,157.1 4,158.0 4,159.0		FLOOD	FLOODII
1% ANNU	REGULATORY	4,157.1 4,158.0 4,159.0			
	MEAN VELOCITY (FEET/ SECOND)	1. 5. 5. 5. 5. 5. 5. 5. 5. 5. 5. 5. 5. 5.		<u> </u>	
FLOODWAY	SECTION AREA (SQ. FEET)	1,721 1,549 208 388	Flow Split 1 model at this focation	IENT AGEN	, EAS
	WIDTH (FEET)	655 409 48 73	Slough Flow Split 1	MERGENCY MANAGEME!	OREGON AND INCORPORATED AREAS
NOI	DISTANCE <sup>1</sup>	1,195 1,948 2,466 3,356	gence with Foley d by 2D or hybrid	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNFY COLINTY	OF AND INCOR
LOCATION	CROSS SECTION <sup>2</sup>	<b>∢</b> ຫ∪⊡	Feet above convergence with Foley Slough	FEDER	
			100000000000000000000000000000000000000	TAI	BLE 23

Table 23: Floodway Data (continued)

FACE	NCREASE	0.1 0.4 0.6			Π 4
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH FLOODWAY	4,157.7 4,157.8 4,158.4 4,159.6		FLOODWAY DATA	FLOODING SOURCE: FOLEY SLOUGH FLOW SPLIT
AL CHANCE FLOOD WATER ELEVATION (FEET NAVD88)	WITHOUT FLOODWAY	4,157.6 4,157.7 4,158.0 4,159.0		FLOOD	FLOODII
1% ANNU	REGULATORY	4,157.5 4,157.7 4,158.0 4,159.0			
	MEAN VELOCITY (FEET/ SECOND)	0.9 1.1 1.3		ر	
FLOODWAY	SECTION AREA (SQ. FEET)	470 344 889 466	Flow Split 3	MENT AGEN	r, REAS
<b>14.</b>	WIDTH (FEET)	255 247 286 165		CY MANAGEME	OREGON AND INCORPORATED AREAS
NO.	DISTANCE <sup>1</sup>	348 844 1,462 1,955	gence with Foley	FEDERAL EMERGENCY MANAGEMENT AGENCY	AND INCOF
LOCATION	CROSS SECTION <sup>2</sup>	< m ∪ □	Feet above convergence with Foley Slough Flow Split 3	FEDER	
				TA	BLE 23

Table 23: Floodway Data (continued)

			 			····	ı
URFACE	INCREASE	0.2			4	: /ies river	
.OOD WATER S :EET NAVD88)	WITH FLOODWAY	4,172.5			FLOODWAY DATA	FLOODING SOURCE: OUGH FLOW TO SILV	
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITHOUT FLOODWAY	4,171.7			FLOOD	FOLEY SLOUGH FLOW TO SILVIES RIVER	
1% ANNU	REGULATORY	4,171.7 4,171.8				FOLE	
	MEAN VELOCITY (FEET/ SECOND)	£. r.			≿		99
FLOODWAY	SECTION AREA (SQ. FEET)	364 551		model at this location	MENT AGEN Y.	REAS	
<u>"</u>	WIDTH (FEET)	127		s River I 1D/2D model a	EMERGENCY MANAGEME HARNEY COUNTY	OREGON AND INCORPORATED AREAS	
No	DISTANCE	1,434 2,199		gence with Silvie d by 2D or hybri	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY.	OI AND INCOR	
LOCATION	CROSS SECTION <sup>2</sup>	<b>∢</b> ໝ		<sup>1</sup> Feet above convergence with Silvies River <sup>2</sup> Floodway computed by 2D or hybrid 1D/2D	FEDER		
L	<u>, , , , , , , , , , , , , , , , , , , </u>				TAE	BLE 23	

																									 4
URFACE	INCREASE	0	0.1	0.2	0.2	0.3	0.3	0.3	0.4	9.0	0.8	6.0	1.0	6.0	6.0	1.0	0.8	0.7	0.3	0.4	0.3	9.4	0.3	0.3	
OOD WATER S EET NAVD88)	WITH	4 154 0	4.154.2	4,154.7	4,155.7	4,156.8	4,157.8	4,158.3	4,159.6	4,160.5	4,161.4	4,163.3	4,164.0	4,164.6	4,166.1	4,167.5	4,168.4	4,169.0	4,172.1	4,172.4	4,172.6	4,173.0	4,173.7	4,174.3	
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITHOUT	4 153 9	4,154.1	4,154.5	4,155.5	4,156.5	4,157.5	4,158.0	4,159.2	4,159.9	4,160.6	4,162.4	4,163.0	4,163.7	4,165.2	4,166.5	4,167.6	4,168.3	4,171.8	4,172.0	4,172.3	4,172.6	4,173.4	4,174.0	
1% ANNU	REGULATORY	4 153 0	4,154.1	4,154.5	4,155.5	4,156.5	4,157.5	4,158.0	4,159.2	4,159.9	4,160.6	4,162.4	4,163.0	4,163.7	4,165.2	4,166.5	4,167.6	4,168.3	4,171.8	4,172.0	4,172.3	4,172.6	4,173.4	4,174.0	
	MEAN VELOCITY (FEET/ SECOND)	17	. c.	2.1	2.9	3.5	2.1	2.5	4.2	4.3	4.0	3.1	2.7	3.4	3.9	3.1	8;	2.3	1.9	1.8	1,9	2.2	2.2	2.6	
FLOODWAY	SECTION AREA (SQ. FEET)	361	319	342	293	244	510	453	370	362	417	648	757	604	528	652	1,166	891	765	786	738	644	684	578	West Fork Silvies River
ъ.	WIDTH (FEET)	75	78	83	20	41	91	90	58	44	90	112	74	83	74	7.1	187	150	72	29	77	63	79	09	River / West Fo
ION	DISTANCE <sup>1</sup>	8 307	8,978	10,211	12,094	13,304	15,086	16,325	17,965	18,479	19,135	21,481	22,571	23,463	25,515	27,317	30,134	32,519	36,392	38,024	39,668	41,285	43,929	45,942	Fast Fork Silvies
LOCATION	CROSS SECTION	ব	. ω	ပ	۵	ш	ш	ტ	I	_	٠,	×		M	z	0	Δ.	ø	œ	S	<b>}</b>	<b>&gt;</b>	^	W	 * Foot above soft of East Fork Silving River

eet above split of East Fork Silvies River / West Fork Silvies River

EI OODWAY DATA		EL CODING SOURCE: SU VIES RIVER	
FEDERAL EMERGENCY MANAGEMENT AGENCY	HARNEY COUNTY,	OREGON	AND INCORPORATED AREAS
T	ΑB	LE :	23

Table 23: Floodway Data (continued)

	O-000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000 - 000				
URFACE	INCREASE	0 0 0 4		_	S RIVER
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH	4,175.0 4,176.6 4,176.6		FLOODWAY DATA	FLOODING SOURCE: SILVIES RIVER
IAL CHANCE FI ELEVATION (F	WITHOUT	4,174.6 4,175.4 4,176.2		FLOOD	OODING SOU
1% ANNL	REGULATORY	4,174.6 4,175.4 4,176.2			FL(
	MEAN VELOCITY (FEET/ SECOND)	2 2 2 8 8 <del>1</del>		<u></u>	
FLOODWAY	SECTION AREA (SQ. FEET)	569 532 552	West Fork Silvies River	MENT AGENO Y,	EAS
<b></b>	WIDTH (FEET)	<b>छ</b> श्र	River / West Fo	EMERGENCY MANAGEME HARNEY COUNTY,	OREGON AND INCORPORATED AREAS
NOI	DISTANCE <sup>†</sup>	47,714 50,004 51,316	East Fork Silvies	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY,	OF AND INCOR
LOCATION	CROSS SECTION	××N	Feet above split of East Fork Silvies River #	FEDER	
		-		TAE	LE 23

URFACE	NCREASE	0.9 0.7 0.7 0.3 0.5 0.3 0.3 0.3 0.3	
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH FLOODWAY	4,151.8 4,152.7 4,152.9 4,153.9 4,153.9 4,156.3 4,156.3 4,156.3 4,156.3 4,156.3 4,156.3 4,156.3 4,160.1 4,160.1	
IAL CHANCE FLOOD WATER ELEVATION (FEET NAVD88)	WITHOUT FLOODWAY	4,150.9 4,152.0 4,152.0 4,152.9 4,153.0 4,153.4 4,153.4 4,155.6 4,156.0 4,156.0 4,159.3 4,159.3 4,159.9	
1% ANNU	REGULATORY	4 150.9 4 152.0 51.4 4 4 152.0 51.52.0 51.53.2 51.53.2 51.53.2 51.53.2 51.53.2 51.53.2 51.53.2 51.53.2 51.53.2 51.53.2 51.53.0 51.53.2 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0 51.53.0	
	MEAN VELOCITY (FEET/ SECOND)	7.1.00 7.00 7.00 7.00 7.00 7.00 7.00 7.0	
FLOODWAY	SECTION AREA (SQ. FEET)	6,580 12,472 8,046 10,654 10,042 7,267 3,270 1,743 4,618 5,363 5,363 5,363 5,363 5,363 5,363 5,363	
Ŧ	WIDTH (FEET)	1,098 2,505 2,239 2,472 2,996 2,918 3,130 2,565 1,031 992 2,728 2,728 1,772 557 557 558 413	
Noi	DISTANCE <sup>1</sup>	572 1,960 2,658 3,108 4,093 5,754 6,444 7,725 8,769 8,902 9,757 10,641 11,288 11,474	
LOCATION	CROSS SECTION <sup>2</sup>	<b>人因ひひヨドロエーシベーMNOPG</b>	

\*Feet above a point approximately 2,900 feet downstream of Highway 78 Ploodway computed by 2D or hybrid 1D/2D model at this location

FLOODING SOURCE:	SILVIES RIVER EAST OVERBANK FLOW SPLIT	
------------------	----------------------------------------	--

FLOODWAY DATA

AND INCORPORATED AREAS

OREGON

TABLE 23

FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY,

Table 23: Floodway Data (continued)

1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	REGULATORY FLOODWAY FLOODWAY	4,175.0 4,175.6 0.6 4,175.3 4,175.3 4,175.7 0.4 4,176.0 4,176.0 0.3		FLOODWAY DATA	FLOODING SOURCE: SILVIES RIVER FLOW SPLIT TO FOLEY SLOUGH 1
_	MEAN VELOCITY (FEET/ SECOND)	0: 1 0: 2 1: 4, 4, 4			SIL
FLOODWAY	SECTION VE AREA (SQ. FEET) SE	4, 4, 4, 4, 4, 4, 4, 4, 4, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,	model at this location	NAGEMENT AGENCY	r, REAS
•	WIDTH (FEET)	784 305 1,190	Slough 1 D/2D model	CY MANAGEME	111 ( ) 1
NOI	DISTANCE <sup>1</sup>	463 2,008 3,543	Jence with Foley by 2D or hybrid	FEDERAL EMERGENCY MAI	OI AND INCOF
LOCATION	CROSS SECTION <sup>2</sup>	<b>∢</b> ထ ∪	Feet above convergence with Foley Slough	FEDER	
				TA	BLE 23

Table 23: Floodway Data (confinued)

***************		, , ,				·	7
JRFACE	INCREASE	9 O O				FLOODING SOURCE: SII VIES RIVER FLOW SPLIT TO FOLEY SLOUGH 2	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH FLOODWAY	4,176.6 4,177.7 4,178.2			FLOODWAY DATA	FLOODING SOURCE:	
IAL CHANCE FLOOD WATER ELEVATION (FEET NAVD88)	WITHOUT	4,176.0 4,176.8 4,177.4			FLOOD	FLOODII	
1% ANNU	REGULATORY	4,176.0 4,176.8 4,177.4				SII VIES R	200
	MEAN VELOCITY (FEET/ SECOND)	2.3 3.2 1.1			ζλ		7.4
FLOODWAY	SECTION AREA (SQ. FEET)	907 723 862		model at this location	MENT AGENI Y.	, EAS	25
<b>14.</b> ,	WIDTH (FEET)	206 112 122	Slough	1D/2D model a	MERGENCY MANAGEMI HARNEY COUNTY	OREGON AND INCORPORATED AREAS	LONA ED A
NOI	DISTANCE <sup>1</sup>	1,193 1,529 1,672	ence with Foley	d by 2D or hybrid	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY.	OF CANDINA	AND INCOM
LOCATION	CROSS SECTION <sup>2</sup>	∢ a ∪	Feet above convergence with Foley Slough	² Floodway computed by 2D or hybrid 1D/2D	FEDER		
					TAE	3LE 23	

Table 23: Floodway Data (continued)

					, m
URFACE	INCREASE	ဖ တ ဝ င			FLOODING SOURCE: SILVIES RIVER FLOW SPLIT TO FOLEY SLOUGH 3
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)	WITH FLOODWAY	4,175.5 9,176.9		FLOODWAY DATA	FLOODING SOURCE: R FLOW SPLIT TO FOL
JAL CHANCE FI ELEVATION (F	WITHOUT FLOODWAY	4,174.9 4,176.0		FLOOD	FLOODII IVER FLOW (
1% ANNL	REGULATORY	4,174.9 4,176.0			SILVIES R
	MEAN VELOCITY (FEET/ SECOND)	2.6 		λć	
FLOODWAY	SECTION AREA (SQ. FEET)	908 905	model at this location	rent agen( Y,	EAS
<u>.                                    </u>	WIDTH (FEET)	146 176	Slough 1D/2D model at	Y COUNTY,	OREGON AND INCORPORATED AREAS
NOI	DISTANCE'	2,783	jence with Foley d by 2D or hybrid	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY,	OF AND INCOR
LOCATION	CROSS SECTION <sup>2</sup>	<b>∢</b> ∞	<sup>1</sup> Feet above convergence with Foley Slough <sup>2</sup> Floodway computed by 2D or hybrid 1D/2D	FEDER	
				TAE	LE 23

Table 23: Floodway Data (continued)

			 	<sup>1</sup> -1				4	
URFACE	INCREASE	0.8	100 Maria (100 Maria (					EY SLOUGH	
1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD83)	WITH	4,175.2 4,175.2 4,175.4			01 30 110 + (50 100 <b>1 x 1</b> 01		FLOODWAY DATA	FLOODING SOURCE: SILVIES RIVER FLOW SPLIT TO FOLEY SLOUGH 4	
JAL CHANCE FI ELEVATION (F	WITHOUT FLOODWAY	4,174,4 4,174,5 4,175.0					FLOOD	FLOODIN	
1% ANNL	REGULATORY	4,174.4 4,174.5 4,175.0						SILVIES RI	
	MEAN VELOCITY (FEET/ SECOND)	0.7 1.1 0.6					<u>*</u>		
FLOODWAY	SECTION AREA (SQ. FEET)	530 496 1,271				model at this location	IENT AGENC Y,	EAS	
<b>-</b>	WIDTH (FEET)	148 141 340					EMERGENCY MANAGEMEI HARNEY COUNTY,	OREGON AND INCORPORATED AREAS	
NO	DISTANCE <sup>1</sup>	1,315 1,695 2,111				ence with Foley a	FEDERAL EMERGENCY MANAGEMENT AGENCY HARNEY COUNTY,	OF AND INCOR	
LOCATION	CROSS SECTION <sup>2</sup>	≪m∪				<sup>1</sup> Feet above convergence with Foley Slough <sup>2</sup> Floodway computed by 2D or hybrid 1D/2D	FEDERA		

TABLE 23

# Table 24: Flood Hazard and Non-Encroachment Data for Selected Streams [Not Applicable to this Flood Risk Project]

#### 6.4 Coastal Flood Hazard Mapping

This section is not applicable to this Flood Risk Project.

# Table 25: Summary of Coastal Transect Mapping Considerations [Not Applicable to this Flood Risk Project]

#### 6.5 FIRM Revisions

This FIS Report and the FIRM are based on the most up-to-date information available to FEMA at the time of its publication; however, flood hazard conditions change over time. Communities or private parties may request flood map revisions at any time. Certain types of requests require submission of supporting data. FEMA may also initiate a revision. Revisions may take several forms, including Letters of Map Amendment (LOMAs), Letters of Map Revision Based on Fill (LOMR-Fs), Letters of Map Revision (LOMRs) (referred to collectively as Letters of Map Change (LOMCs)), Physical Map Revisions (PMRs), and FEMA-contracted restudies. These types of revisions are further described below. Some of these types of revisions do not result in the republishing of the FIS Report. To assure that any user is aware of all revisions, it is advisable to contact the community repository of flood-hazard data (shown in Table 30, "Map Repositories").

#### 6.5.1 Letters of Map Amendment

A LOMA is an official revision by letter to an effective NFIP map. A LOMA results from an administrative process that involves the review of scientific or technical data submitted by the owner or lessee of property who believes the property has incorrectly been included in a designated SFHA. A LOMA amends the currently effective FEMA map and establishes that a specific property is not located in a SFHA.

To obtain an application for a LOMA, visit <a href="www.fema.gov/flood-maps/change-your-flood-zone">www.fema.gov/flood-maps/change-your-flood-zone</a> and download the form "MT-1 Application Forms and Instructions for Conditional and Final Letters of Map Amendment and Letters of Map Revision Based on Fill". Visit the "Flood Map-Related Fees" section to determine the cost, if any, of applying for a LOMA.

FEMA offers a tutorial on how to apply for a LOMA. The LOMA Tutorial Series can be accessed at <a href="https://www.fema.gov/flood-maps/tutorials">www.fema.gov/flood-maps/tutorials</a>.

For more information about how to apply for a LOMA, call the FEMA Mapping and Insurance eXchange; toll free, at 1-877-FEMA MAP (1-877-336-262).

### 6.5.2 Letters of Map Revision Based on Fill

A LOMR-F is an official revision by letter to an effective NFIP map. A LOMR-F states FEMA's determination concerning whether a structure or parcel has been elevated on fill above the base flood elevation and is, therefore, excluded from the SFHA.

Information about obtaining an application for a LOMR-F can be obtained in the same manner as that for a LOMA, by visiting <a href="www.fema.gov/flood-maps/change-your-flood-zone">www.fema.gov/flood-maps/change-your-flood-zone</a> for the "MT-1 Application Forms and Instructions for Conditional and Final Letters of Map Amendment and Letters of Map Revision Based on Fill" or by calling the FEMA Mapping and Insurance eXchange, toll free, at 1-877-FEMA MAP (1-877-336-2627). Fees for applying for a LOMR-F, if any, are listed in the "Flood Map-Related Fees" section.

A tutorial for LOMR-F is available at <a href="https://www.fema.gov/flood-maps/tutorials">www.fema.gov/flood-maps/tutorials</a>.

#### 6.5.3 Letters of Map Revision

A LOMR is an official revision to the currently effective FEMA map. It is used to change flood zones, floodplain and floodway delineations, flood elevations and planimetric features. All requests for LOMRs should be made to FEMA through the chief executive officer of the community, since it is the community that must adopt any changes and revisions to the map. If the request for a LOMR is not submitted through the chief executive officer of the community, evidence must be submitted that the community has been notified of the request.

To obtain an application for a LOMR, visit <a href="www.fema.gov/flood-maps/change-your-flood-zone">www.fema.gov/flood-maps/change-your-flood-zone</a> and download the form "MT-2 Application Forms and Instructions for Conditional Letters of Map Revision and Letters of Map Revision". Visit the "Flood Map-Related Fees" section to determine the cost of applying for a LOMR. For more information about how to apply for a LOMR, call the FEMA Mapping and Insurance eXchange; toll free, at 1-877-FEMA MAP (1-877-336-2627) to speak to a Map Specialist.

Previously issued mappable LOMCs (including LOMRs) that have been incorporated into the Harney County FIRM are listed in Table 26. Please note that this table only includes LOMCs that have been issued on the FIRM panels updated by this map revision. For all other areas within this county, users should be aware that revisions to the FIS Report made by prior LOMRs may not be reflected herein and users will need to continue to use the previously issued LOMRs to obtain the most current data.

# Table 26: Incorporated Letters of Map Change [Not Applicable to this Flood Risk Project]

#### 6.5.4 Physical Map Revisions

A Physical Map Revisions (PMR) is an official republication of a community's NFIP map to effect changes to base flood elevations, floodplain boundary delineations, regulatory floodways and planimetric features. These changes typically occur as a result of structural works or improvements, annexations resulting in additional flood hazard areas or correction to base flood elevations or SFHAs.

The community's chief executive officer must submit scientific and technical data to FEMA to support the request for a PMR. The data will be analyzed and the map will be revised if warranted. The community is provided with copies of the revised information and is afforded a review period. When the base flood elevations are changed, a 90-day

appeal period is provided. A 6-month adoption period for formal approval of the revised map(s) is also provided.

For more information about the PMR process, please visit <u>www.fema.gov</u> and visit the Floods & Maps "Change Your Flood Zone Designation" section.

#### 6.5.5 Contracted Restudies

The NFIP provides for a periodic review and restudy of flood hazards within a given community. FEMA accomplishes this through a national watershed-based mapping needs assessment strategy, known as the Coordinated Needs Management Strategy (CNMS). The CNMS is used by FEMA to assign priorities and allocate funding for new flood hazard analyses used to update the FIS Report and FIRM. The goal of CNMS is to define the validity of the engineering study data within a mapped inventory. The CNMS is used to track the assessment process, document engineering gaps and their resolution, and aid in prioritization for using flood risk as a key factor for areas identified for flood map updates. Visit <a href="www.fema.gov">www.fema.gov</a> to learn more about the CNMS or contact the FEMA Regional Office listed in Section 8 of this FIS Report.

#### 6.5.6 Community Map History

The current FIRM presents flooding information for the entire geographic area of Harney County. Previously, separate FIRMs, Flood Hazard Boundary Maps (FHBMs) and/or Flood Boundary and Floodway Maps (FBFMs) may have been prepared for the incorporated communities and the unincorporated areas in the county that had identified SFHAs. Current and historical data relating to the maps prepared for the project area are presented in Table 27, "Community Map History." A description of each of the column headings and the source of the date is also listed below.

- Community Name includes communities falling within the geographic area shown
  on the FIRM, including those that fall on the boundary line, nonparticipating
  communities, and communities with maps that have been rescinded.
  Communities with No Special Flood Hazards are indicated by a footnote. If all
  maps (FHBM, FBFM, and FIRM) were rescinded for a community, it is not listed
  in this table unless SFHAs have been identified in this community.
- Initial Identification Date (First NFIP Map Published) is the date of the first NFIP map that identified flood hazards in the community. If the FHBM has been converted to a FIRM, the initial FHBM date is shown. If the community has never been mapped, the upcoming effective date or "pending" (for Preliminary FIS Reports) is shown. If the community is listed in Table 27 but not identified on the map, the community is treated as if it were unmapped.
- Initial FHBM Effective Date is the effective date of the first FHBM. This date may
  be the same date as the Initial NFIP Map Date.
- FHBM Revision Date(s) is the date(s) that the FHBM was revised, if applicable.
- Initial FIRM Effective Date is the date of the first effective FIRM for the community.

FIRM Revision Date(s) is the date(s) the FIRM was revised, if applicable. This is
the revised date that is shown on the FIRM panel, if applicable. As countywide
studies are completed or revised, each community listed should have its FIRM
dates updated accordingly to reflect the date of the countywide study. Once the
FIRMs exist in countywide format, as PMRs of FIRM panels within the county are
completed, the FIRM Revision Dates in the table for each community affected by
the PMR are updated with the date of the PMR, even if the PMR did not revise all
the panels within that community.

The initial effective date for the Harney County FIRMs in countywide format was 04/20/2022.

**Table 27: Community Map History** 

Community Name	Initial Identification Date	Initial FHBM Effective Date	FHBM Revision Date(s)	Initial FIRM Effective Date	FIRM Revision Date(s)
Burns Palute Reservation	07/18/1978	07/18/1978	N/A	09/28/1984	02/08/2024 04/20/2022
Burns, City of	11/30/1973	11/30/1973	01/30/1976	08/15/1984	02/08/2024 04/20/2022 12/22/1998 11/03/1989
Harney County, Unincorporated Areas	04/18/1978	04/18/1978	N/A	04/17/1984	02/08/2024 04/20/2022 12/22/1998
Hines, City of	11/30/1973	11/30/1973	05/21/1976	09/28/1984	02/08/2024 04/20/2022 11/03/1989

# SECTION 7.0 - CONTRACTED STUDIES AND COMMUNITY COORDINATION

### 7.1 Contracted Studies

Table 28 provides a summary of the contracted studies, by flooding source, that are included in this FIS Report.

Table 28: Summary of Contracted Studies Included in this FIS Report

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Brown Canyon	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns Paiute Reservation; Burns, City of; Harney County, Unincorporated Areas

Table 28: Summary of Contracted Studies Included in this FIS Report (continued)

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Brown Canyon	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns Palute Reservation; Burns, City of; Harney County, Unincorporated Areas
Cricket Creek	4/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas
Drainage B	04/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas; Hines, City of
Drainage C	12/22/1998	USACE, Walla Walla District	IAA-H-9- 79	1982	Harney County, Unincorporated Areas; Hines, City of
Drainage D	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas; Hines, City of
Drainage E	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns, City of; Harney County, Unincorporated Areas; Hines, City of
Drainage E-1	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns Paiute Reservation; Burns, City of; Harney County, Unincorporated Areas
Drainage E-2	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns, City of
Drainage H	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns Palute Reservation; Harney County, Unincorporated Areas

Table 28: Summary of Contracted Studies Included in this FIS Report (continued)

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
East Fork Silvies River	04/20/2022	STARR II	HSFEHQ- 09-D-0370	June 2016	Harney County, Unincorporated Areas
East Harney County Basin	4/20/2022	STARR	HSFEHQ- 09-D-0370	October 2020	Burns Paiute Reservation; Harney County, Unincorporated Areas
Emigrant Creek	4/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas
Foley Slough	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Foley Slough Flow Split 1	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Foley Slough Flow Split 2	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Foley Slough Flow Split 3	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Foley Slough Flow Split 4	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Foley Slough Flow to Silvles River	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Hay Creek	4/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas
Malheur River	12/22/1998	USACE, Walla Walla District	IAA-H-9- 79	1982	Harney County, Unincorporated Areas

Table 28: Summary of Contracted Studies Included in this FIS Report (continued)

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Miller Canyon	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns Paiute Reservation; Harney County, Unincorporated Areas
Poison Creek	04/20/2022	STARR II	HSFEHQ- 09-D-0370	June 2016	Harney County, Unincorporated Areas
Poison Creek	04/20/2022	STARR II	HSFEHQ- 09-D-0370	June 2016	Harney County, Unincorporated Areas
Poison Creek Slough	04/20/2022	STARR II	HSFEHQ- 09-D-0370	June 2016	Harney County, Unincorporated Areas
Silvies River	04/20/2022	STARR II	HSFEHQ- 09-D-0370	June 2016	Harney County, Unincorporated Areas
Silvies River	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Burns Paiute Reservation; Burns, City of; Harney County, Unincorporated Areas
Silvies River	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Silvies River	04/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas
Silvies River Reach 2	4/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas
Silvies River East Overbank Flow Split	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Silvies River Flow Split to Foley Slough 1	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas

Table 28: Summary of Contracted Studies Included in this FIS Report (continued)

Flooding Source	FIS Report Dated	Contractor	Number	Work Completed Date	Affected Communities
Silvies River Flow Split to Foley Slough 2	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Silvies River Flow Split to Foley Slough 3	02/08/2024	STARR II	ARR II 15-D-0005 2021 Unincorporate Areas		Harney County, Unincorporated Areas
Silvies River Flow Split to Foley Slough 3	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Silvies River Flow Split to Foley Slough 4	02/08/2024	STARR II	HSFE60- 15-D-0005	November 2021	Harney County, Unincorporated Areas
Trout Creek	4/20/2022	Oregon Department of Geology and Mineral Industries (DOGAMI)	HSFEHQ- 09-D-0370	December 2012	Harney County, Unincorporated Areas
West Fork Silvies River	04/20/2022	STARR II	HSFEHQ- 09-D-0370	June 2016	Harney County, Unincorporated Areas

### 7.2 Community Meetings

The dates of the community meetings held for this Flood Risk Project and previous Flood Risk Projects are shown in Table 29. These meetings may have previously been referred to by a variety of names (Community Coordination Officer (CCO), Scoping, Discovery, etc.), but all meetings represent opportunities for FEMA, community officials, study contractors, and other invited guests to discuss the planning for and results of the project.

Table 29: Community Meetings

Community	FIS Report Dated	Date of Meeting	Meeting Type	Attended By
Burns Paiute	7006180160	09/16/2021	Flood Risk Review	Representatives of Burns Paiute Tribe, Oregon Department of Land Conservation & Development, FEMA, Hamey County, OR, STARR II
Reservation	+303,003,0	06/23/2022	Final CCO	Representatives of Burns Palute Reservation, City of Burns, City of Hines, FEMA, Harney County, Resilience Action Partners, STARR II, U.S. Army Corps of Engineers
		09/15/2021	Flood Risk Review	Representatives of City of Burns, Oregon Department of Land Conservation & Development, FEMA, STARR II
Burns, City of	02/08/2024	06/23/2022	Final CCO	Representatives of Burns Paiute Reservation, City of Burns, City of Hines, FEMA, Harney County, Resilience Action Partners, STARR II, U.S. Army Corps of Engineers
Harney County,	i cuci a di cu	09/16/2021	Flood Risk Review	Representatives of Burns Paiute Tribe, Oregon Department of Land Conservation & Development, FEMA, Harney County, OR, STARR II
Unincorporated Areas	17070070	06/23/2022	Final CCO	Representatives of Burns Paiute Reservation, City of Burns, City of Hines, FEMA, Harney County, Resilience Action Partners, STARR II, U.S. Army Corps of Engineers
Line Other St	7000100100	09/15/2021	Flood Risk Review	Representatives of City of Hines, Oregon Department of Land Conservation & Development, FEMA, STARR II
niies, city o	+202/00/20	06/23/2022	Final CCO	Representatives of Burns Paiute Reservation, City of Burns, City of Hines, FEMA, Harney County, Resilience Action Partners, STARR II, U.S. Army Corps of Engineers

## **SECTION 8.0 -- ADDITIONAL INFORMATION**

Information concerning the pertinent data used in the preparation of this FIS Report can be obtained by submitting an order with any required payment to the FEMA Engineering Library. For more information on this process, see www.fema.gov.

The additional data that was used for this project includes the FIS Report and FIRM that were previously prepared for Harney County, Unincorporated Areas (Harney Co. FIS, 1998), the FIS Report and FIRM previously prepared for the City of Burns (City of Burns FIS, 1998), the FIS Report and FIRM previously prepared for the Burns Paiute Reservation (Burns Paiute FIS, 1984), and the FIS Report and FIRM previously prepared for the City of Hines (City of Hines FIS, 1989).

Table 30 is a list of the locations where FIRMs for Harney County can be viewed. Please note that the maps at these locations are for reference only and are not for distribution. Also, please note that only the maps for the community listed in the table are available at that particular repository. A user may need to visit another repository to view maps from an adjacent community.

Table 30: Map Repositories

Community	Address	City	State	Zip Code
Burns Paiute Reservation	Burns Paiute Tribal Office 100 Pasigo Street	Burns	OR	97720
Burns, City of	City Hall 242 South Broadway Avenue	Burns	OR	97720
Harney County, Unincorporated Areas	Harney County Planning Department 360 North Alvord Avenue	Burns	OR	97720
Hines, City of	City Hall 101 East Barnes Avenue	Hines	OR	97738

The National Flood Hazard Layer (NFHL) dataset is a compilation of effective FIRM Databases and LOMCs. Together they create a GIS data layer for a State or Territory. The NFHL is updated as studies become effective and extracts are made available to the public monthly. NFHL data can be viewed or ordered from the website shown in Table 31.

Table 31 contains useful contact information regarding the FIS Report, the FIRM, and other relevant flood hazard and GIS data. In addition, information about the State NFIP Coordinator and GIS Coordinator is shown in this table. At the request of FEMA, each Governor has designated an agency of State or territorial government to coordinate that State's or territory's NFIP activities. These agencies often assist communities in developing and adopting necessary floodplain management measures. State GIS Coordinators are knowledgeable about the availability and location of State and local GIS data in their state.

Table 31: Additional Information

	FEMA and the NFIP
FEMA and FEMA Engineering Library website	www.fema.gov/national-flood-insurance-program-flood-hazard-mapping/engineering-library
NFIP website	www.fema.gov/national-flood-insurance-program
NFHL Dataset	msc.fema.gov
FEMA Region 10	Federal Regional Center 130 228th Street SW Bothell, WA 98021-9796 (425) 487-4657
	Other Federal Agencies
USGS website	www.usgs.gov
Hydraulic Engineering Center website	www.hec.usace.army.mil
	State Agencies and Organizations
Oregon NFIP Coordinator	Celinda Adair, CFM Oregon Dept. of Land Conservation and Development 635 Capitol Street NE, Suite 150 Salem, OR 97301-2540 Phone: (503) 934-0069 celinda.adair@state.or.us
Interim Oregon Risk MAP Coordinator	Matthew Crall Oregon Dept. of Land Conservation and Development 635 Capitol Street NE, Suite 150 Salem, OR 97301-2540 Phone: (503) 934-0046 matthew.crall@state.or.us

# SECTION 9.0 - BIBLIOGRAPHY AND REFERENCES

Table 32 includes sources used in the preparation of and cited in this FIS Report as well as additional studies that have been conducted in the study area.

Table 32: Bibliography and References

Link	https://www.blm.gov/or/gis/ data- details.php?data=ds00001	https://www.geocommunic ator.gov/GeoComm/Isis h ome/home/index.htm	https://www.fema.gov/	https://www.fema.gov/	https://www.fema.gov/	https://www.fema.gov/	https://www.fema.gov/
Publication Date/ Date of Issuance	September, 2011	September, 2011	September, 1984	March, 1984	December, 1998	December, 1998	November, 1989
Place of Publication	Washington, D.C.	Washington, D.C.	Oakton, Virginia	Oakton, Virginia	Oakton, Virginia	Oakton, Virginia	Oakton, Virginia
Author/Editor	Bureau of Land Management	Bureau of Land Management	Federal Emergency Management Agency	Federal Emergency Management Agency	Federal Emergency Management Agency	Federal Emergency Management Agency	Federal Emergency Management Agency
Publication Title, "Article," Volume, Number, etc.	Oregon/Washington Surface Management Ownership	Public Land Survey System from Blm Geographic Coordinate Database	Burns Paiute indian Reservation, Oregon, Flood Insurance Rate Map 1984	Burns Paiute indian Reservation, Oregon, Flood Insurance Study 1984	City of Burns, Oregon, Flood Insurance Rate Map 1998	City of Burns, Oregon, Flood Insurance Study 1998	City of Hines, Oregon, Flood Insurance Study 1989
Publisher/ Issuer	Bureau of Land Management	Bureau of Land Management	Federal Emergency Management Agency	Federal Emergency Management Agency	Federal Emergency Management Agency	Federal Emergency Management Agency	Federal Emergency Management Agency
Citation in this FIS	BLM, 2011a	BLM, 2011b	BURNS PAIUTE, 1984a	BURNS PAIUTE, 1984b	CITY OF BURNS, 1998a	CITY OF BURNS, 1998b	CITY OF HINES, 1989

Table 32: Bibliography and References (continued)

	Link		https://www.oregongeolog y.org/	https://www.oregongeolog y.org/	https://www.oregongeolog y.org/	https://www.oregongeolog v.org/	https://www.oregongeolog y.org/sub/projects/olc/defa ult.htm
(non	Publication Date/ Date of Issuance	August, 2011	2012	December, 2012	May, 2015	May, 2015	May, 2015
(	Place of Publication	Portland, Oregon	Portland, Oregon	Portland, Oregon	Portland, Oregon	Portland, Oregon	Portland, Oregon
	Author/Editor	Oregon Lidar Consortium; Watershed Sciences Inc.	Oregon Department of Geology and Mineral	Oregon Department of Geology and Mineral Industries	Oregon Department of Geology and Mineral Industries	Oregon Department of Geology and Mineral Industries	Oregon Lidar Consortium; Watershed Sciences Inc.
	Publication Title, "Article," Volume, Number, etc.	Datum Conversions Derived from Lidar Collected in 2011	Airport Tarmacs Digitized On Lidar Collected in 2011	DOGAMI Hydrologic Study for A Zones	Water Bodies Digitized from Lidar Collected in 2011 and 2015 and 2011 NIAP Imagery	Streams Digitized from Lidar Collected in 2011 and 2015 and 2011 NIAP Imagery	Terrain Submission for Harney County
	Publisher/ Issuer	Oregon Department of Geology and Mineral industries	Oregon Department of Geology and Mineral industries	Oregon Department of Geology and Mineral industries			
	Citation in this FIS	DOGAMI, 2011	DOGAMI, 2012	DOGAMI, 2013	DOGAMI, 2015a	DOGAMI, 2015b	DOGAMI, 2015c

Table 32: Bibliography and References (continued)

Link	https://www.oregongeolog y.org/	https://www.fema.gov/		https://www.geosolveinc.c	https://www.fema.gov/	https://www.fema.gov/	https://www.co.harney.or.u	https://www.co.harney.or.u
Publication Date/ Date of Issuance	April, 2016	April, 2016	October, 1973	December, 2011	April, 1984	December, 1998	August, 2013	August, 2013
Place of Publication	Portland, Oregon	Oakton, Virginia	Ontario, Oregon	Burns, Oregon	Oakton, Virginia	Oakton, Virginia	Burns, Oregon	Burns, Oregon
Author/Editor	Oregon Department of Geology and Mineral Industries	Oregon Department of Geology and Mineral Industries	G&W Engineering	GEOSOLVE, Inc.	Federal Emergency Management Agency	Federal Emergency Management Agency	Harney County Planning Department	Harney County Planning Department
Publication Title, "Article," Volume, Number, etc.	DOGAMI DFIRM Task	Harney County Basemap Submittal	Topographic Maps, City of Burns, Scale 1:1,200, Contour interval 2 Feet	911 Emergency Transportation Layer (Geosolve)	Harney County, Oregon, Flood Insurance Rate Map 1984	Harney County, Oregon, Flood Insurance Study 1998	Harney County City Limits	911 Emergency Transportation Layer (Harney County)
Publisher/ Issuer	Oregon Department of Geology and Mineral industries	Federal Emergency Management Agency	G&W Engineering	Harney County, Oregon	Federal Emergency Management Agency	Federal Emergency Management Agency	Harney County, Oregon	Harney County, Oregon
Citation in this FIS	DOGAMI, 2016a	DOGAMI, 2016b	G&W, 1973	GEOSOLVE, 2011	HARNEY COUNTY, 1984	HARNEY COUNTY, 1998	HARNEY COUNTY, 2013a	HARNEY COUNTY, 2013b

Table 32: Bibliography and References (continued)

Link	https://www.co.harney.or.u	https://www.co.harney.or.u	https://www.co.harney.or.u			
Publication Date/ Date of Issuance	April, 2021	April, 2021	April, 2021	April, 1978	December, 2001	August, 2018
Place of Publication	Burns, Oregon	Burns, Oregon	Burns, Oregon		Silver Spring, Maryland	Laurel, Maryland
Author/Editor	Harney County GIS	Harney County GIS	Harney County GIS	U.S. Department of Housing and Urban Development- Federal Insurance	NOAA/National Weather Service/office of Hydrologic Development/H ydrometeorolog ical Design Studies Center (HDSC)	Strategic Alliance For Risk Reduction
Publication Title, "Article," Volume, Number, etc.	Harney County City and Reservation Limits	Harney County Water Lines	911 Emergency Transportation Layer (Harney County)	Flood Hazard Boundary Map, Harney County, Oregon	NOAA Atlas 2 - Precipitation-Frequency Atlas for The Western United States All-Season Series	Incorporation of Floodplain Mapping information To The Harney Countywide Study
Publisher/ Issuer	Harney County, Oregon	Harney County, Oregon	Harney County, Oregon	U.S. Department of Housing and Urban Development-Federal Insurance Administration	NOAA / National Weather Service	Strategic Alliance for Risk Reduction II
Citation in this FIS	HARNEY COUNTY, 2021a	HARNEY COUNTY, 2021b	HARNEY COUNTY, 2021c	HUD, 1978	NOAA, 2001	STARR II, 2015

Table 32: Bibliography and References (continued)


(0.00)	her/ Publication Title, "Article," Volume, Number, etc. Author/Editor Publication Date of Issuance Link	gic Alliance STARR II Hydrologic Study Alliance For Laurel, June, 2016  Risk Reduction Maryland II	gic Alliance East Harney Valley Alliance For Laurel, October, 2020 Il Maryland Approximate Analyses	gic Alliance DFIRM Database Strategic Raleigh, Submission for Harney Risk Reduction County II Carolina	lency Harney County Phase II Alliance For Washington May 2022 https://hazards.fema.gov	rmy Corps Aerial Photograph Burns U.S. Army Corps of March, 1975 Ineers Scale 1:4,800 Engineers	rmy Corps Aerial Photograph, Scale U.S. Army September Corps of September, 1979 Engineers	Imy Corps Burns, Scale 1:6,000, Corps of Flown November 8, 1979 Engineers	Imy Corps Aerial Photos, Scale
	Publisher/ Publication Issuer Volume, N	Strategic Alliance STARR II I for Risk Reduction for A Zone	Strategic Alliance East Harns for Risk Reduction Approxima	Strategic Alliance DFIRM Da for Risk Reduction Submission II	Federal Emergency Harney Co Management Riverine SI	U.S. Army Corps Aerial Pholo of Engineers Scale 1:4,8	U.S. Army Corps Aerial Pholof 1:2,400, Floof final Pholof Engineers 11, 1979	U.S. Army Corps Burns, Sca of Engineers Flown Nov	U.S. Army Corps Aerial Phot
	Citation in this FIS	STARR II, 2016	STARR II, 2020	STARR II, 2022a	STARR II, 2022b	USACE, 1975	USACE, 1979a	USACE, 1979b	USACE,


Table 32: Bibliography and References (continued)


						-	,	
<u></u>		https://www.hec.usace.ar my.mil/software/hec- ras/documentation.aspx					https://sdmdataaccess.sc.	
Publication Date/	April, 2011	2019	2019	September, 2020	1986	September, 2016	2019	September, 2020
Place of Publication	Portland, Oregon	Davis, California	Davis, California	Davis, California	Washington D.C.	Salt Lake City, Utah	Lincoln, Nebraska	Salt Lake City, Utah
Author/Editor	U.S. Army Corps of Engineers	The Hydrologic Engineering Center	Brunner, G. W.	U.S. Army Corps of Engineers	U.S. Department of Agriculture	USDA-FSA Aerial Photography Field office	USDA/NRCS Soil Survey Center	USDA-Farm Production and Conservation Business Center
Publication Title, "Article," Volume, Number, etc.	2011 Silvies River High Water Marks	HEC-RAS Version 5.0.7	HEC-RAS Version 5.0.7	HEC-HMS Version 4.6.1	Urban Hydrology for Small Watersheds, Technical Release 55 (Tr-55), (Second Ed.).	USDA-FSA-APFO Digital Ortho Mosaic	Gridded Soil Survey Geographic (GSSURGO) by State	NAIP basemap orthoimagery used to inform flood hazard delineations
Publisher/ Issuer	U.S. Army Corps of Engineers	U.S. Army Corps of Engineers	U.S. Army Corps of Engineers	U.S. Army Corps of Engineers	U.S. Department of Agriculture- Farm Service Agency	U.S. Department of Agriculture- Farm Service Agency	U.S. Department of Agriculture- Farm Service Agency	U.S. Department of Agriculture- Farm Service Agency
Citation in this FIS	USACE, 2011	USACE, 2019a	USACE, 2019b	USACE, 2020	USDA, 1986	USDA, 2016	USDA, 2019	USDA, 2020


Table 32: Bibliography and References (continued)

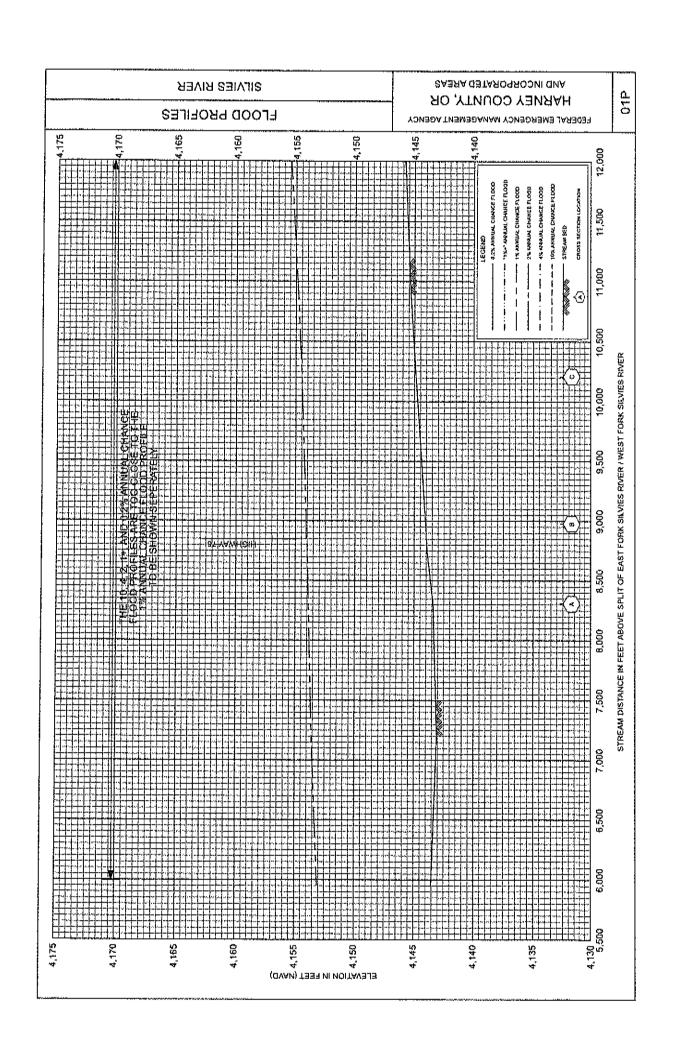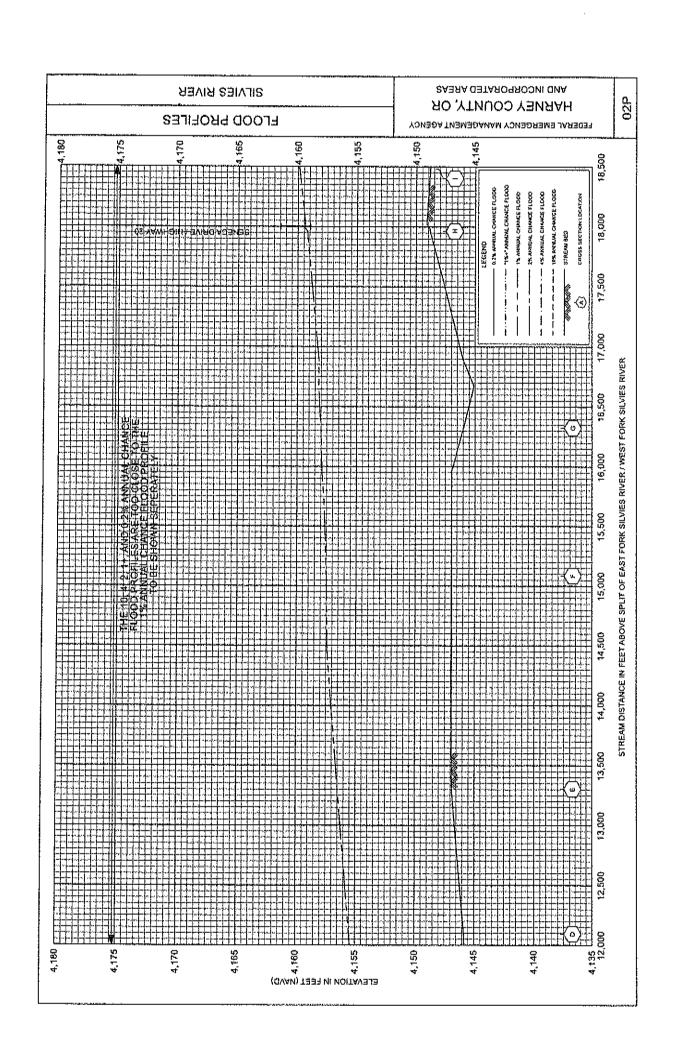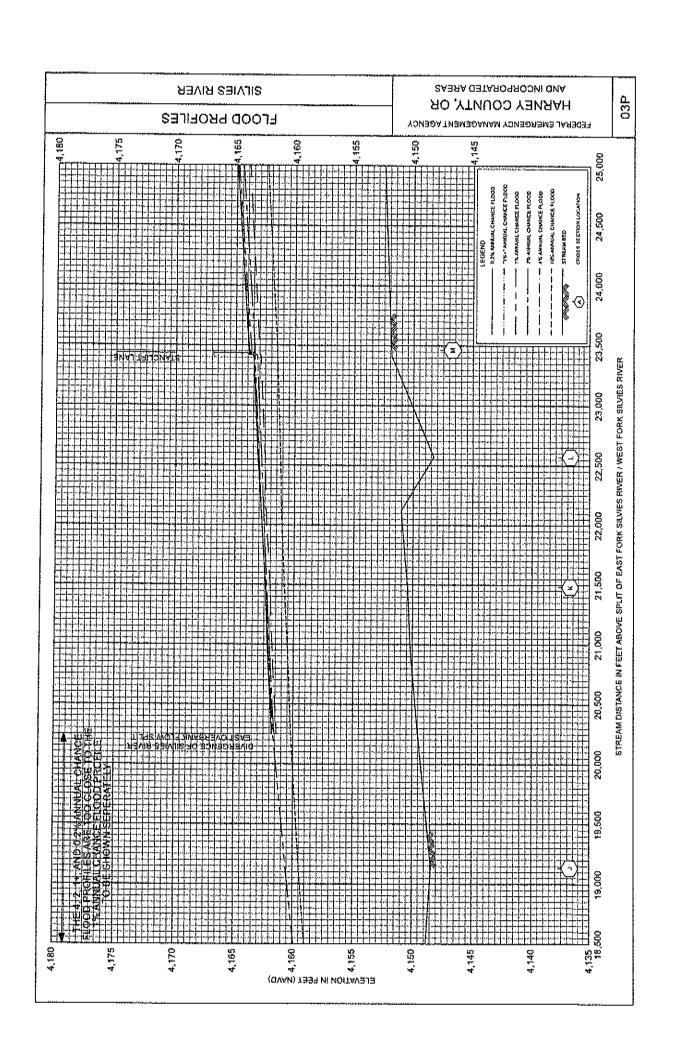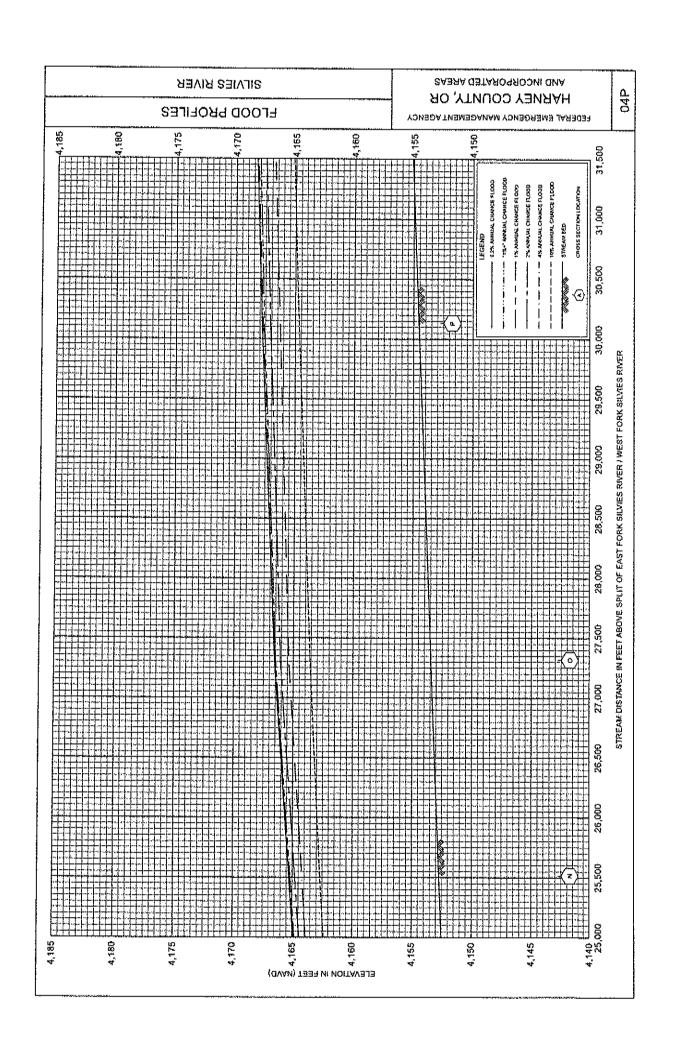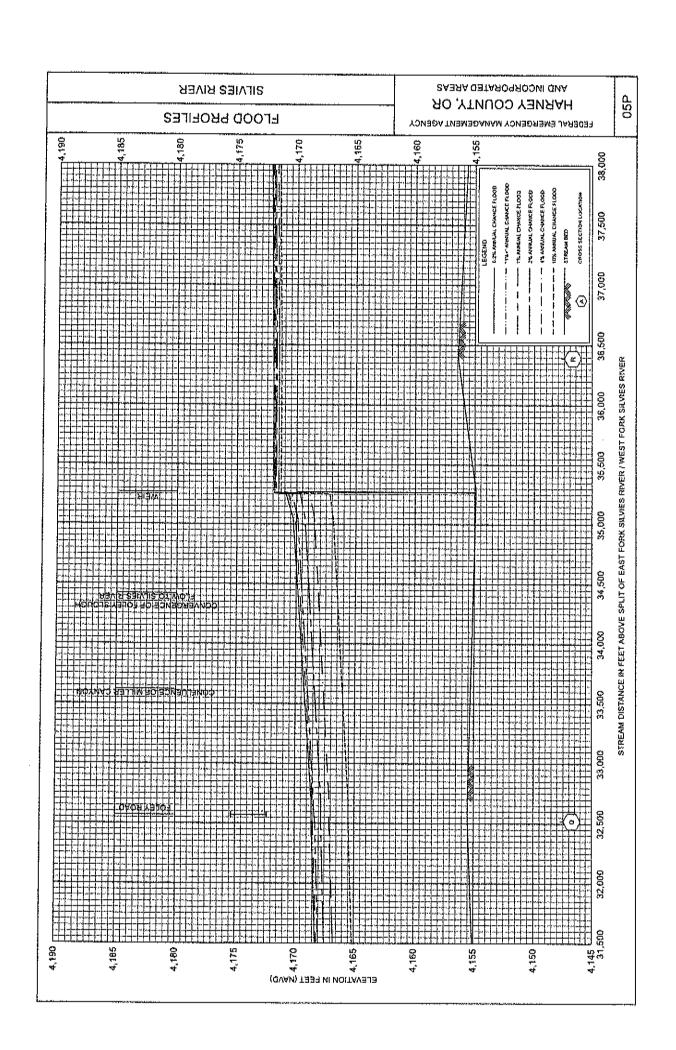
						14
Link	https://www.usgs.gov/		15	https://nhd.usgs.gov/		https://apps.nationalmap.g ov/downloader/#/
Publication Date/ Date of Issuance	02/08/2024	1960	1960	July, 2011	2019	June, 2020
Place of Publication	Reston, Virginia			Denver, Colorado		Washington, D.C.
Author/Editor	U.S. Geological Survey	U.S. Geological Survey	U.S. Geological Survey	Pacific Northwest Hydrography Framework	U.S. Geological Survey	U.S. Geological Survey
Publication Title, "Article," Volume, Number, etc.	USGS National Map: Orthoimagery for FIRM Panels Dated 02/08/2024	15-Minute Series Topographic Maps, Scale 1:62,500, Contour intervals 10, 20, and 40 Feet: Dog Mountain, Oregon (1959); Lowen, Oregon (1960); Crane, Oregon (1960);	7.5-Minute Series Topographic Maps, Scale 1:24,000, Contour interval 20 Feet	Pacific Northwest Hydrography Framework	NLCD 2016 Land Cover Conterminous United States	NHD Data
Publisher/ Issuer	United States Geological Survey National Map	United States Geological Survey	United States Geological Survey	United States Geological Survey	United States Geological Survey	United States Geological Survey
Citation in this FIS	USGS National Map	USGS, 1960a	USGS, 1960b	USGS, 2011	USGS, 2019	USGS, 2020

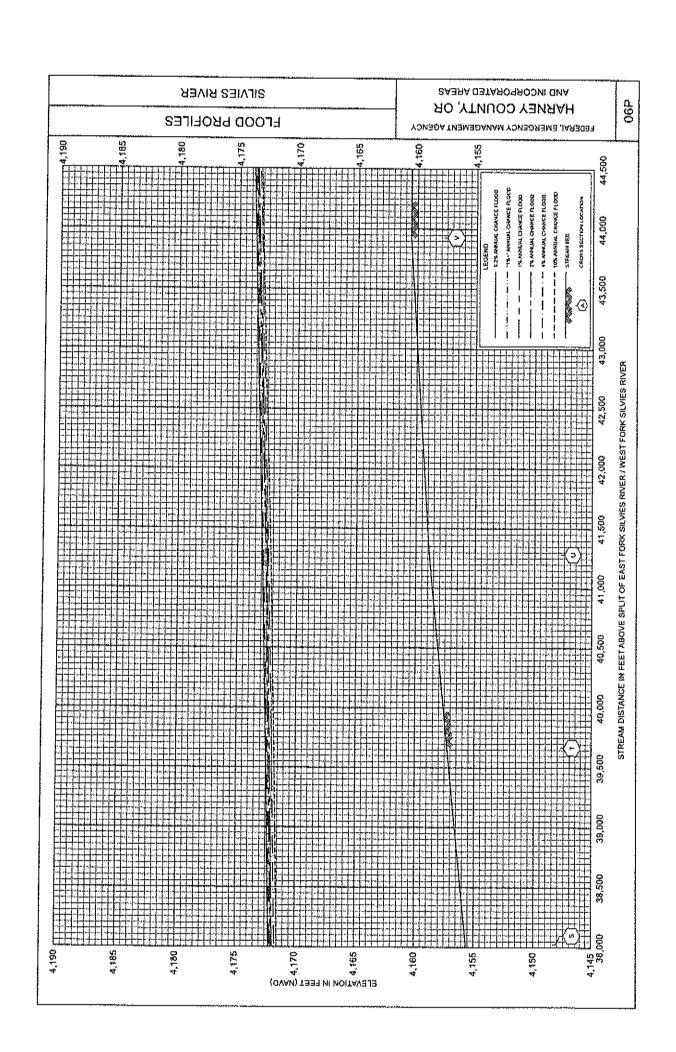


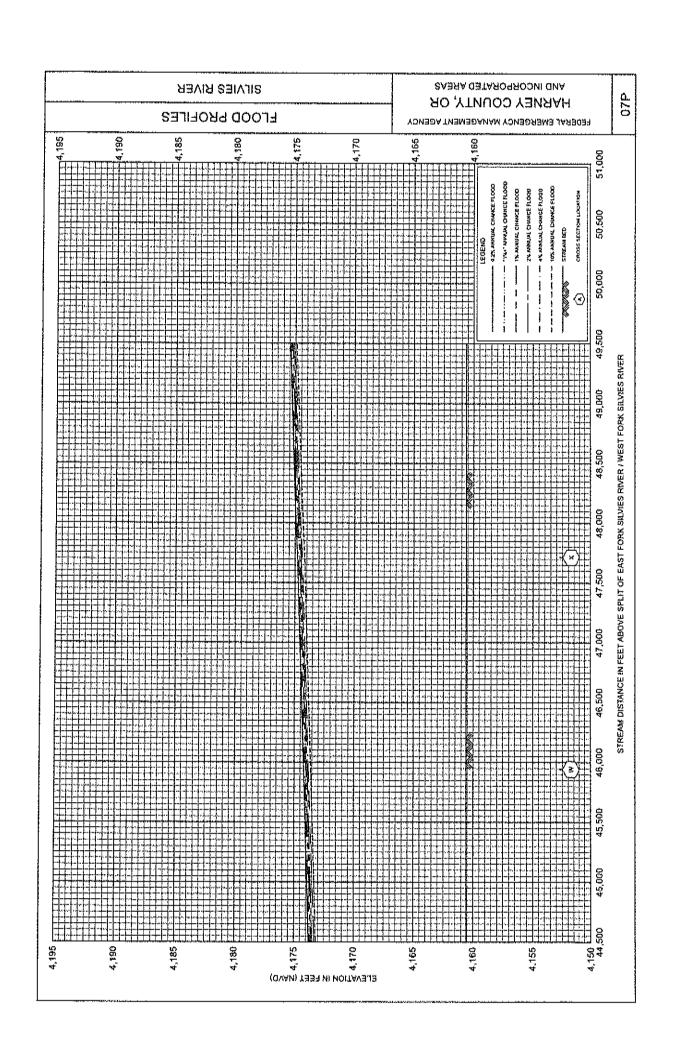


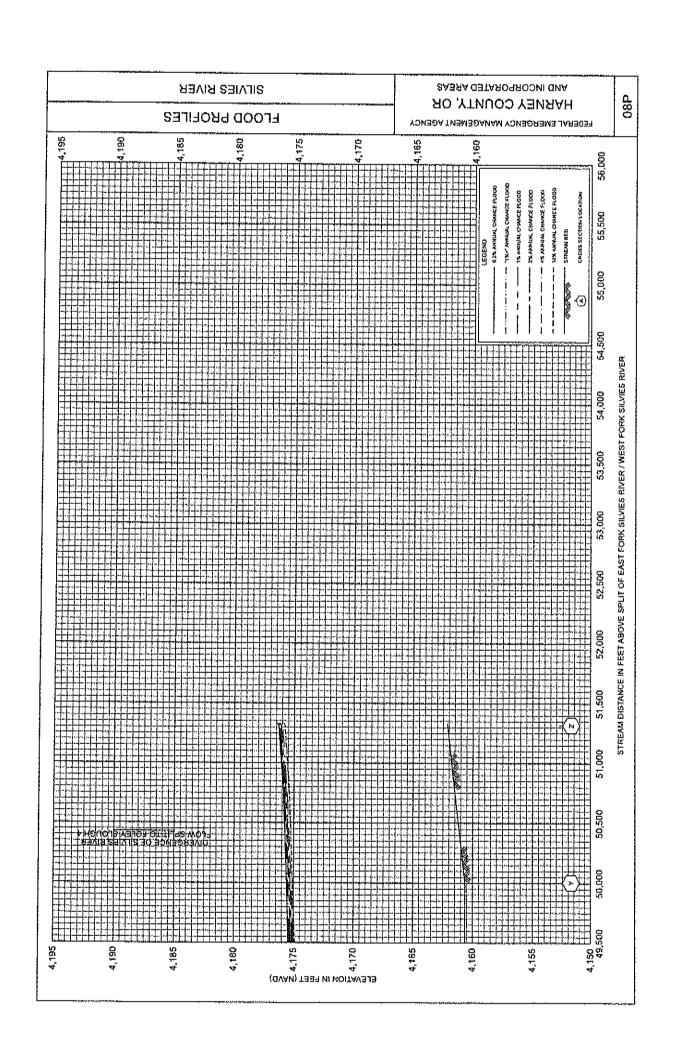


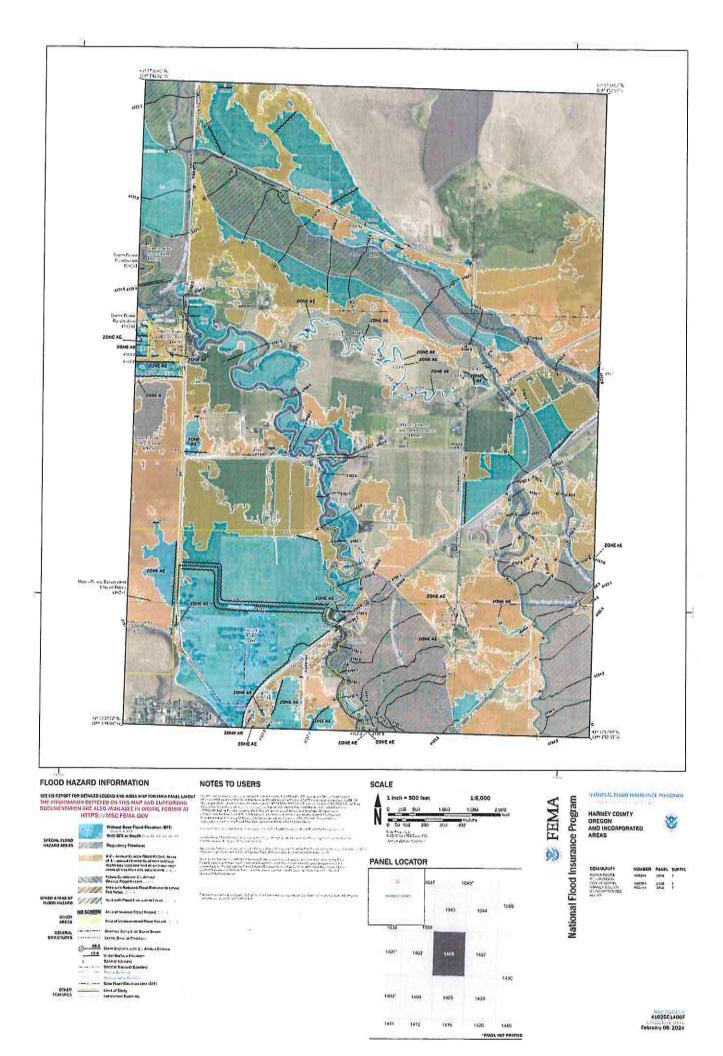


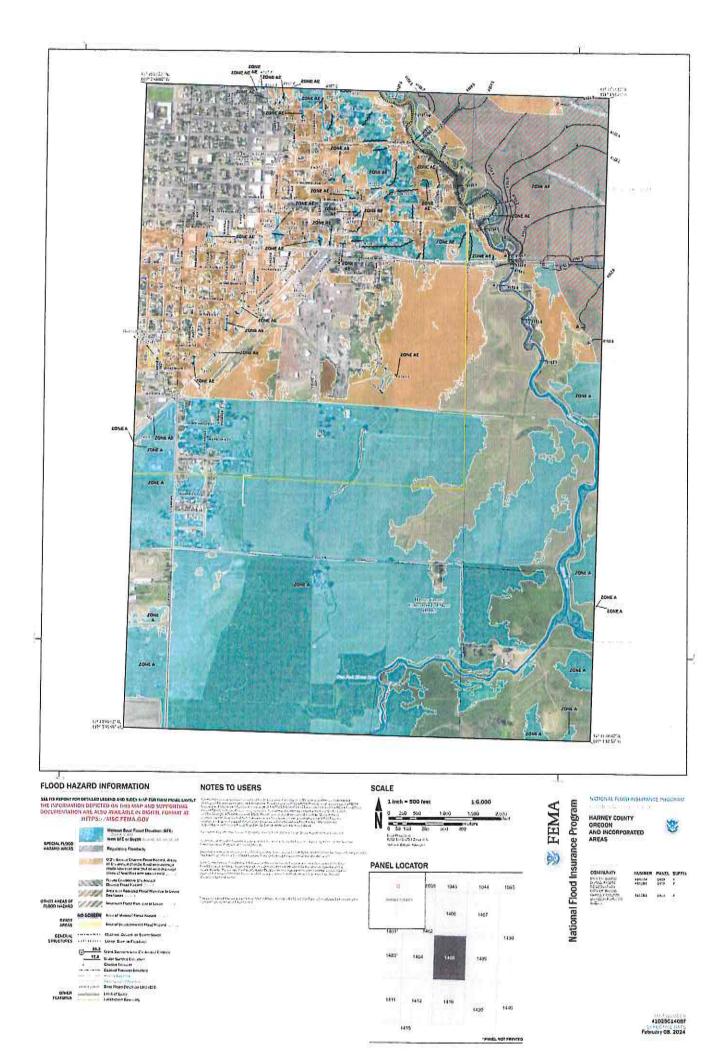


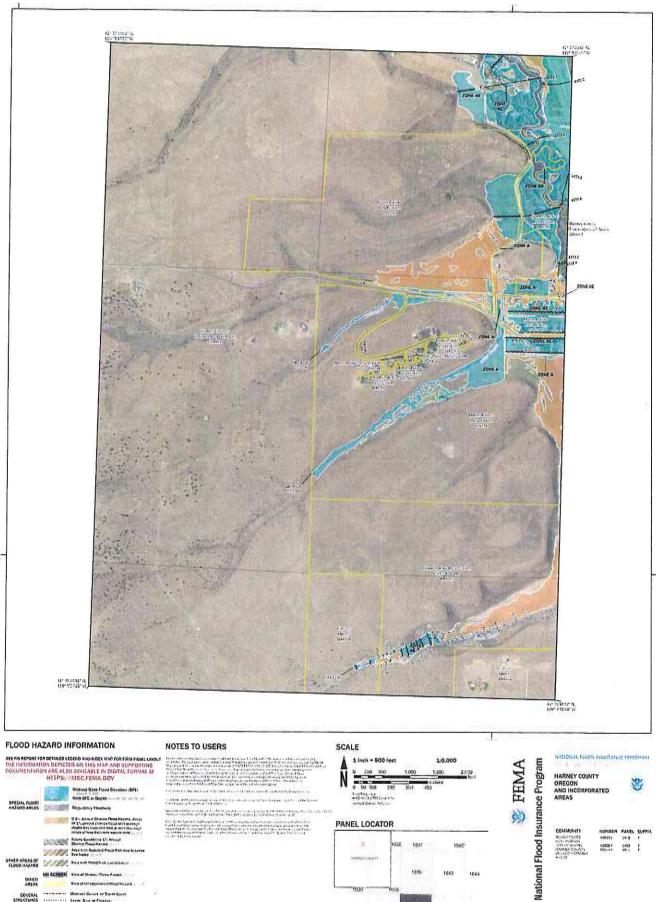
















has been been realised that a similar product of a month of the control of the similar product of the similar prod



COMMUNITY BURES CAUTE INFO FAMILE INFO FAMILE HANCE TO FAMILE MARKETO FOR THE FAMILE

NUMBER PARE, SUPPLY URST: 18-2 F 110021 18-2 F

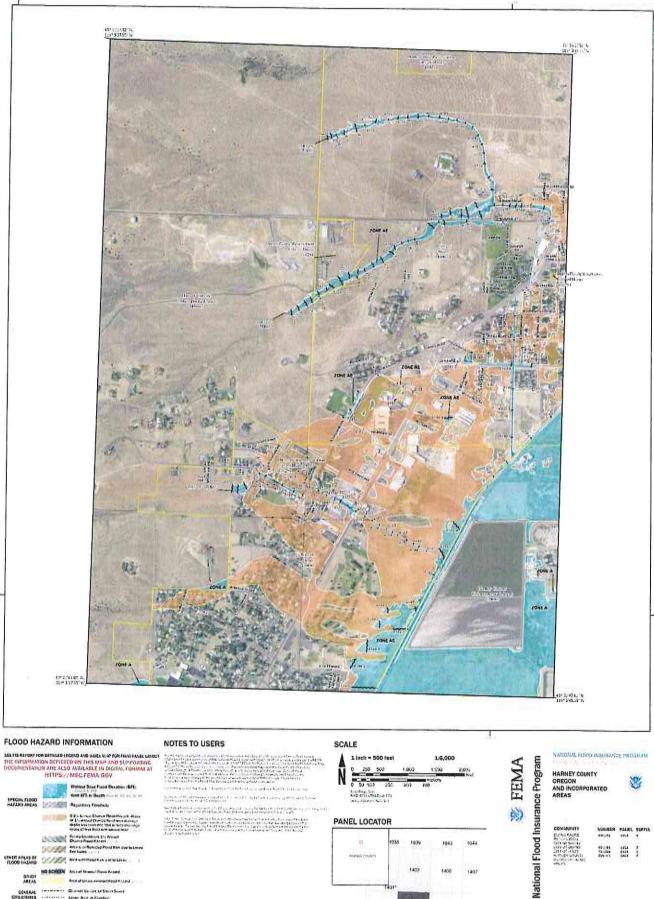
41025C1402F February 08, 2024





Service Medical Conditions of the most of the service great analysis.

Control of the second of the s (A) Fig. 1, and (a) Decreased a proper security of a control of a c



NEL LO	CATOR			
а	1938	1039	1043	1044
37272.0	Gov	1402	1400	140
1400*	14031	1404	1408	1409
	(4))	1412	1416	1420
	1419			10407
			PANEL NOT PRO	

HARNEY COUNTY OREGON AND INCORPORATED AREAS



11:01 101 1

41025C1404F February 08, 2024

## City of Burns Zoning Ordinance

18.30.300 Overlay Zones.

\*\*\*\*

#### 18.30.325 Flood Hazard Area

- 1. Purpose. It is the purpose of this section to promote the public health, safety, and general welfare, and to minimize public and private losses due to flood conditions in specific areas by provisions designed:
  - A. To protect human life and health;
  - B. To minimize expenditure of public money and costly flood control projects;
  - C. To minimize the need for rescue and relief efforts associated with flooding and generally undertaken at the expense of the general public;
  - **D.** To minimize prolonged business interruptions:
  - E. To minimize damage to public facilities and utilities such as water and gas mains, electric, telephone and sewer lines, streets, and bridges located in areas of special flood hazard;
  - F. To help maintain a stable tax base by providing for the sound use and development of areas of special flood hazard so as to minimize future flood blight areas;
  - G. To ensure that potential buyers are notified that property is in an area of special flood hazard;
  - H. To ensure that those who occupy the areas of special flood hazard assume responsibility for their actions.
- 2. Definitions Specific to the City of Burns Flood Hazard Regulations. Unless specifically defined below, words or phrases used in this section shall be interpreted so as to give them the meaning they have in common usage. The defined terms below are specific to administration of the City of Burns flood hazard regulations. The definitions in this section do not apply generally to the balance of the City of Burns Zoning Ordinance.

"Area of shallow flooding" means a designated Zone AO, AH, AR/AO or AR/AH on a community's flood insurance rate map (FIRM) with a one percent or greater annual chance of flooding to an average depth of one to three feet where a clearly defined channel does not exist, where the path of flooding is unpredictable, and where velocity flow may be evident. Such flooding is characterized by ponding or sheet flow.

"Area of special flood hazard" means the land in the floodplain area within a community subject to a one percent or greater chance of flooding in any given year. It is shown on the flood insurance rate map (FIRM) as Zone A, AO, AH, A1-30, AE, A99, AR. "Special flood hazard area" is synonymous in meaning and definition with the phrase "area of special flood hazard."

"Base flood" means the flood having a one percent chance of being equaled or exceeded in any given year.

"Base flood elevation (BFE)" means the elevation to which floodwater is anticipated to rise during the base flood.

"Basement" means any area of the building having its floor subgrade (below ground level) on all sides.

"Critical facility" means a facility for which even a slight chance of flooding might be too great. Critical facilities include, but are not limited to, schools, nursing homes, hospitals, police, fire and emergency response installations, installations which produce, use, or store hazardous materials or hazardous waste.

"Development" means a building or mining operation, making a material change in the use or appearance of a structure or land, dividing land into two or more parcels, including partitions and subdivisions as provided in ORS 92.010 to 92.285, and creating or terminating a right of access. "Development" also means any manmade change to improved real estate, including but not limited to buildings or other structures, mining, dredging, filling, grading, paving, excavation, or drilling operations.

"Elevated building" means, for insurance purposes, a non-basement building which has its lowest elevated floor raised above ground level by foundation walls, shear walls, posts, piers, pilings, or columns.

"Flood" or "flooding" means:

- A. A general and temporary condition of partial or complete inundation of normally dry land areas from:
  - (1) The overflow of inland or tidal waters.
  - (2) The unusual and rapid accumulation or runoff of surface waters from any source.
  - (3) Mudslides (i.e., mudflows) which are proximately caused by flooding as defined in subsection (A)(2) of this definition and are akin to a river of liquid and flowing mud on the surfaces of normally dry land areas, as when earth is carried by a current of water and deposited along the path of the current.

B. The collapse or subsidence of land along the shore of a lake or other body of water as a result of crosion or undermining caused by waves or currents of water exceeding anticipated cyclical levels or suddenly caused by an unusually high water level in a natural body of water, accompanied by a severe storm, or by an unanticipated force of nature, such as flash flood or an abnormal tidal surge, or by some similarly unusual and unforesceable event which results in flooding as defined in subsection (A)(1) of this definition.

Flood Elevation Study. See "flood insurance study (FIS)."

"Flood insurance rate map (FIRM)" means the official map of a community, on which the Federal Insurance Administrator has delineated both the special hazard areas and the risk premium zones applicable to the community. A FIRM that has been made available digitally is called a digital flood insurance rate map (DFIRM).

"Flood insurance study (FIS)" means an examination, evaluation and determination of flood hazards and, if appropriate, corresponding water surface elevations, or an examination, evaluation and determination of mudslide (i.e., mudflow) and/or flood-related erosion hazards.

"Floodplain variance" means a grant of relief by the City of Burns from the terms of a floodplain area management regulation.

"Floodplain violation" means the failure of a structure or other development to be fully compliant with the community's floodplain area management regulations. A structure or other development without the elevation certificate, other certifications, or other evidence of compliance required in this section is presumed to be in violation until such time as that documentation is provided.

"Floodproofing" means any combination of structural and nonstructural additions, changes, or adjustments to structures which reduce or eliminate risk of flood damage to real estate or improved real property, water and sanitary facilities, structures, and their contents.

"Floodway" means the channel of a river or other watercourse and the adjacent land areas that must be reserved in order to discharge the base flood without cumulatively increasing the water surface elevation more than a designated height. Also referred to as "regulatory floodway."

"Functionally dependent use" means a use which cannot perform its intended purpose unless it is located or carried out in close proximity to water. The term includes only docking facilities, port facilities that are necessary for the loading and unloading of cargo or passengers, and ship building and ship repair facilities, and does not include long-term storage or related manufacturing facilities.

"Highest adjacent grade" means the highest natural elevation of the ground surface prior to construction next to the proposed walls of a structure.

"Historic structure" means any structure that is:

- A. Listed individually in the National Register of Historic Places (a listing maintained by the Department of the Interior) or preliminarily determined by the Secretary of the Interior as meeting the requirements for individual listing on the National Register;
- **B.** Certified or preliminarily determined by the Secretary of the Interior as contributing to the historical significance of a registered historic district or a district preliminarily determined by the Secretary to qualify as a registered historic district;
- C. Individually listed on a state inventory of historic places in states with historic preservation programs which have been approved by the Secretary of the Interior; or
- **D.** Individually listed on a local inventory of historic places in communities with historic preservation programs that have been certified either:
  - (1) By an approved state program as determined by the Secretary of the Interior; or
  - (2) Directly by the Secretary of the Interior in states without approved programs.
- E. A structure designated as a historic structure in the City of Burns Comprehensive Plan, pursuant to Statewide Planning Goal 5.

"Lowest floor" means the lowest floor of the lowest enclosed area (including basement). An unfinished or flood resistant enclosure, usable solely for parking of vehicles, building access or storage in an area other than a basement area is not considered a building's lowest floor; provided, that such enclosure is not built so as to render the structure in violation of the applicable non-elevation design requirements of this section.

"Manufactured dwelling" means a structure, transportable in one or more sections, which is built on a permanent chassis and is designed for use with or without a permanent foundation when attached to the required utilities. The term "manufactured dwelling" does not include a "recreational vehicle" and is synonymous with "manufactured home."

"Mean sea level" means, for purposes of the National Flood Insurance Program, the National Geodetic Vertical Datum (NGVD) of 1929 or other datum, to which base flood elevations shown on a community's flood insurance rate map are referenced.

Special Flood Hazard Area. See "area of special flood hazard" for this definition.

"Start of construction" includes substantial improvement as defined herein below, and means, for floodplain management purposes, the date the building permit was issued, provided that the actual start of construction, repair, reconstruction, rehabilitation, addition, placement, or other improvement was within 180 days from the date of the permit. The actual start means either the first placement of permanent construction of a structure on a site, such as the pouring of slab or footings, the installation of piles, the construction of columns, or any work beyond the stage of excavation; or the placement of a manufactured dwelling on a foundation. Permanent construction does not include land preparation, such as clearing, grading, and

filling; nor does it include the installation of streets and/or walkways; nor does it include excavation for a basement, footings, piers, or foundations or the erection of temporary forms; nor does it include the installation on the property of accessory buildings, such as garages or sheds not occupied as dwelling units or not part of the main structure. For a substantial improvement, the actual start of construction means the first alteration of any wall, ceiling, floor, or other structural part of a building, whether or not that alteration affects the external dimensions of the building.

"Substantial damage" means damage of any origin sustained by a structure whereby the cost of restoring the structure to its before damaged condition would equal or exceed 50 percent of the market value of the structure before the damage occurred.

"Substantial improvement" means any reconstruction, rehabilitation, addition, or other improvement of a structure, the cost of which equals or exceeds 50 percent of the market value of the structure before the "start of construction" of the improvement. This term includes structures which have incurred "substantial damage," regardless of the actual repair work performed. The term does not, however, include either:

- Any project for improvement of a structure to correct existing violations of state or local health, sanitary, or safety code specifications which have been identified by the local code enforcement official and which are the minimum necessary to assure safe living conditions; or
- 2. Any alteration of a "historic structure," provided that the alteration will not preclude the structure's continued designation as a "historic structure."

#### 3. General Provisions.

- A. Lands to Which the City of Burns Floodplain Area Ordinance Applies. This section shall apply to all special flood hazard areas within the jurisdiction of the City of Burns.
- B. Basis for Establishing the Special Flood Hazard Areas. The special flood hazard areas identified by the Federal Insurance Administrator in a scientific and engineering report entitled "The Flood Insurance Study (FIS) for Harney County, Oregon and Incorporated Areas," dated February 8, 2024, with accompanying Flood Insurance Rate Maps (FIRMs) 41025CIND2B, 41025C1402F, 41025C1404F, 41025C1406F, and 41025C1408F, are hereby adopted by reference and declared to be a part of this section. The FIS and FIRM panels are on file at the Planning and Zoning Department located in City Hall.
- 4. Coordination with State of Oregon Specialty Codes. Pursuant to the requirement established in ORS 455 that the City of Burns administers and enforces the State of Oregon Specialty Codes, the City of Burns does hereby acknowledge that the Oregon Specialty Codes contain certain provisions that apply to the design and construction of buildings and structures located in special flood hazard areas. Therefore, this section is intended to be administered and enforced in conjunction with the Oregon Specialty Codes.

## 5. Abrogation and Severability.

- A. This section is not intended to repeal, abrogate, or impair any existing easements, covenants, or deed restrictions. However, where this section and another ordinance, easement, covenant, or deed restriction conflict or overlap, whichever imposes the more stringent restrictions shall prevail.
- **B.** This section and the various parts thereof are hereby declared to be severable. If any section, clause, sentence, or phrase of this section is held to be invalid or unconstitutional by any court of competent jurisdiction, then said holding shall in no way affect the validity of the remaining portions of this section.
- 6. Warning and Disclaimer of Liability. The degree of flood protection required by this section is considered reasonable for regulatory purposes and is based on scientific and engineering considerations. Larger floods can and will occur on rare occasions. Flood heights may be increased by man-made or natural causes. This section does not imply that land outside the areas of special flood hazards or uses permitted within such areas will be free from flooding or flood damages.

This section shall not create liability on the part of the City of Burns, any officer or employee thereof, or the Federal Insurance Administrator for any flood damages that result from reliance on this section or any administrative decision lawfully made hereunder.

- 7. Administration. The City Manager (or their designee) is appointed to administer, implement, and enforce the City of Burns flood hazard regulations by granting or denying development permits in accordance with its provisions. The administrative duties, responsibilities, and requirements have been adopted by City resolution, which may be amended from time to time, and is hereby incorporated by reference.
- 8. Establishment of Development Permit. A floodplain development permit shall be obtained before construction or development begins within any area horizontally within the special flood hazard area established in subsection (3)(B) of this section. The development permit shall be required for all structures, including manufactured dwellings, and for all other development, as defined in subsection (2) of this section, including fill and other development activities.
- 9. Application for Floodplain Development Permit. Application for a development permit shall be made on forms furnished by the Floodplain Administrator. The application requires reproducible site plan(s) drawn to scale showing the nature, location, dimensions, and elevations of the area in question; existing or proposed structures, fill, storage of materials, drainage facilities, and the location of the foregoing along with any other information required by the City of Burns development ordinance for the relevant land use application. The site plan(s) shall be prepared and sealed by an Oregon registered professional engineer or Oregon registered professional land surveyor. Specifically, at least the following information is required:

- A. The applicant shall provide a site plan that depicts proposed elevation (in relation to mean sea level) of the lowest floor (including basement) and all attendant utilities of all new and substantially improved structures.
- **B.** Proposed elevation in relation to mean sea level to which any nonresidential structure will be floodproofed.
- C. Certification by a registered professional engineer or architect licensed in the state of Oregon that the floodproofing methods proposed for any nonresidential structure meet the floodproofing criteria for nonresidential structures in subsection (15)(C)(3) of this section.
- D. Description of the extent to which any watercourse will be altered or relocated.
- E. Base flood elevation data for subdivision proposals or other development when required per subsection (14)(F) of this section.
- F. Substantial improvement calculation for any improvement, addition, reconstruction, renovation, or rehabilitation of an existing structure.
- G. The amount and location of any fill or excavation activities proposed.
- H. For development proposed in mapped floodplains without established base flood elevations, the applicant shall provide a report from an Oregon registered professional engineer that calculates the base flood elevation based upon methodologies consistent with FEMA guidance.
- 10. Floodplain Area Development Permit Criteria. Floodplain development permits shall be approved for permitted uses in the applicable zone for the requested floodplain development permit if all applicable criteria in this section is satisfied. Floodplain development permits may be approved for conditional uses in the applicable zone for the requested floodplain development permit if all applicable criteria in this section is satisfied.
  - A. The application includes all required site plan, survey and engineering information required by subsection (9) of this section; and
  - **B.** The application includes evidence and findings that demonstrate the proposed development complies with all applicable floodplain development standards; or
  - C. The application includes evidence and findings demonstrating how the proposed development can be found to satisfy the floodplain development permit variance criteria and the approving authority for the application concludes the below floodplain development permit variance criteria are satisfied.
    - In addition to satisfaction of the above criteria, the City of Burns may impose conditions of approval to assure applicable floodplain development permit standards and criteria will be satisfied by the proposed development. The City may also impose conditions of

- approval requiring the applicant to furnish documentation as part of the development process to satisfy the City's floodplain administration responsibilities.
- 11. Floodplain Variance Procedure. The issuance of a variance is for floodplain development permit purposes only and it is the only applicable variance criteria for floodplain development permit variance. The criteria for floodplain development permit variance are limited to the extent of the requested variance related to floodplain development permit regulations only. Flood insurance premium rates are determined by federal statute according to actuarial risk and will not be modified by the granting of a variance.
- 12. Floodplain Development Permit Variance Criteria. Generally, variances may be issued for new construction and substantial improvements to be erected on a lot of one-half acre or less in size contiguous to and surrounded by lots with existing structures constructed below the base flood level, in conformance with the provisions of subsections (12)(B), (12)(D) and (13) of this section. As the lot size increases beyond one-half acre, the technical justification required for issuing a variance increases.
  - A. Variances shall only be issued upon a determination that the variance is the minimum necessary, considering the flood hazard, to afford relief.
  - B. Variances shall not be issued within any floodway if any increase in flood levels during the base flood discharge would result.
  - C. Variances shall only be issued upon:
    - (1) A showing of good and sufficient cause;
    - (2) A determination that failure to grant the variance would result in exceptional hardship to the applicant;
    - (3) A determination that the granting of a variance will not result in increased flood heights, additional threats to public safety, extraordinary public expense, create nuisances, cause fraud on or victimization of the public, or conflict with existing laws or ordinances.
  - D. Variances may be issued by a community for new construction and substantial improvements and for other development necessary for the conduct of a functionally dependent use; provided, that the criteria of subsections (12)(A) through (12)(C) of this section are met, and the structure or other development is protected by methods that minimize flood damages during the base flood and create no additional threats to public safety.
- 13. Floodplain Variance Notification. Any applicant to whom a variance is granted shall be given written notice that the issuance of a variance to construct a structure below the base flood elevation will result in increased premium rates for flood insurance and that such construction below the base flood elevation increases risks to life and property. Such notification and a

record of all variance actions, including justification for their issuance, shall be maintained by the Floodplain Administrator.

- 14. Provisions for Flood Hazard Reduction. In all special flood hazard areas, the following standards shall be adhered to:
  - A. Alteration of Watercourses. The applicant shall provide detailed study and site plan that extends above and below the project area that demonstrates the flood carrying capacity within the altered or relocated portion of said watercourse is maintained. This study shall be prepared by an Oregon registered professional engineer and shall document consistency with applicable FEMA guidance for analyzing the flood carrying capacity based upon the scope and extent of the project. The study shall recommend maintenance best practices within the altered or relocated portion of said watercourse to ensure that the flood carrying capacity is not diminished.

## B. Anchoring.

- (1) All new construction and substantial improvements shall be anchored to prevent flotation, collapse, or lateral movement of the structure resulting from hydrodynamic and hydrostatic loads, including the effects of buoyancy.
- (2) All manufactured dwellings shall be anchored per subsection (15)(C)(4) of this section.
- C. Construction Materials and Methods.
  - (1) All new construction and substantial improvements shall be constructed with materials and utility equipment resistant to flood damage.
  - (2) All new construction and substantial improvements shall be constructed using methods and practices that minimize flood damage.

# D. Utilities and Equipment.

- (1) Water Supply, Sanitary Sewer, and On-Site Waste Disposal Systems.
  - (a) All new and replacement water supply systems shall be designed to minimize or eliminate infiltration of floodwaters into the system.
  - (b) New and replacement sanitary sewage systems shall be designed to minimize or eliminate infiltration of floodwaters into the systems and discharge from the systems into floodwaters.
  - (c) On-site waste disposal systems shall be located to avoid impairment to them or contamination from them during flooding consistent with the Oregon Department of Environmental Quality.

- (2) Electrical, Mechanical, Plumbing, and Other Equipment.
  - (a) Electrical, heating, ventilating, air-conditioning, plumbing, duct systems, and other equipment and service facilities shall be elevated above the base flood level one foot or more, or shall be designed and installed to prevent water from entering or accumulating within the components and to resist hydrostatic and hydrodynamic loads and stresses, including the effects of buoyancy, during conditions of flooding. In addition, electrical, heating, ventilating, air-conditioning, plumbing, duct systems, and other equipment and service facilities shall meet all the requirements of this section if replaced as part of a substantial improvement.

### E. Tanks.

- (1) Underground tanks shall be anchored to prevent flotation, collapse, and lateral movement under conditions of the base flood.
- (2) Above-ground tanks shall be installed above the base flood level one foot or more, or shall be anchored to prevent flotation, collapse, and lateral movement under conditions of the base flood.
- F. Subdivision Proposals and Other Proposed Developments. All new subdivision proposals and other proposed new developments (including proposals for manufactured dwelling parks and subdivisions) greater than 50 lots or five acres, whichever is the lesser, shall include within such proposals base flood elevation data for each parcel proposed for development.
- G. Use of Other Base Flood Elevation Data. When base flood elevation data has not been provided in accordance with subsection (3) of this section, the Floodplain Administrator shall obtain, review, and reasonably utilize any base flood elevation data available from a federal, state, or other source, in order to administer this subsection (14). All new subdivision proposals and other proposed new developments (including proposals for manufactured dwelling parks and subdivisions) must meet the requirements of subsection (14)(F) of this section.

Base flood elevations shall be determined for development proposals that are five acres or more in size or are 50 lots or more, whichever is lesser, in any A Zone that does not have an established base flood elevation. Development proposals located within a riverine unnumbered A Zone shall be reasonably safe from flooding; the test of reasonableness includes use of historical data, high water marks, FEMA provided base level engineering data, and photographs of past flooding, etc., where available. Failure to elevate at least two feet above grade in these zones may result in higher insurance rates.

H. Structures Located in Multiple or Partial Flood Zones. In coordination with the State of Oregon Specialty Codes:

- (1) When a structure is located in multiple flood zones on the City of Burns' flood insurance rate maps (FIRMs) the provisions for the more restrictive flood zone shall apply.
- (2) When a structure is partially located in a special flood hazard area, the entire structure shall meet the requirements for new construction and substantial improvements.
- 15. Specific Standards for Riverine Flood Zones. These specific standards shall apply to all new construction and substantial improvements in addition to the general standards contained in subsection (14) of this section.
  - A. Flood Openings. All new construction and substantial improvements with fully enclosed areas below the lowest floor (excluding basements) are subject to the following requirements. Enclosed areas below the base flood elevation, including crawl spaces, shall:
    - (1) Be designed to automatically equalize hydrostatic flood forces on walls by allowing for the entry and exit of floodwaters;
    - (2) Be used solely for parking, storage, or building access;
    - (3) Be certified by a registered professional engineer or architect or meet or exceed all of the following minimum criteria:
      - (a) A minimum of two openings.
      - (b) The total net area of nonengineered openings shall be not less than one square inch for each square foot of enclosed area, where the enclosed area is measured on the exterior of the enclosure walls.
      - (c) The bottom of all openings shall be no higher than one foot above grade.
      - (d) Openings may be equipped with screens, louvers, valves, or other coverings or devices; provided, that they shall allow the automatic flow of floodwater into and out of the enclosed areas and shall be accounted for in the determination of the net open area.
      - (e) All additional higher standards for flood openings in the State of Oregon Residential Specialty Codes Section R322.2.2 shall be complied with when applicable.

## B. Garages.

(1) Attached garages may be constructed with the garage floor slab below the base flood elevation (BFE) in riverine flood zones, if the following requirements are met:

- (a) If located within a floodway the proposed garage must comply with the requirements of subsection (16) of this section;
- (b) The floors are at or above grade on not less than one side;
- (c) The garage is used solely for parking, building access, and/or storage;
- (d) The garage is constructed with flood openings in compliance with subsection (15)(A) of this section to equalize hydrostatic flood forces on exterior walls by allowing for the automatic entry and exit of floodwater;
- (e) The portions of the garage constructed below the BFE are constructed with materials resistant to flood damage;
- (f) The garage is constructed in compliance with the standards in subsection (14) of this section; and
- (g) The garage is constructed with electrical, and other service facilities located and installed so as to prevent water from entering or accumulating within the components during conditions of the base flood.
- (2) Detached garages must be constructed in compliance with the standards for appurtenant structures in subsection (15)(C)(6) of this section or nonresidential structures in subsection (15)(C)(3) of this section depending on the square footage of the garage.
- C. Special Flood Hazard Areas With Base Flood Elevations. In addition to the general standards listed in subsection (14) of this section, the following specific standards shall apply in special flood hazard areas with base flood elevations (BFE): Zones A1-A30, AH, and AE.
  - (1) Before Regulatory Floodway. In areas where a regulatory floodway has not been designated, no new construction, substantial improvement, or other development (including fill) shall be permitted within Zones A1-30 and AE on the community's flood insurance rate map (FIRM), unless it is demonstrated that the cumulative effect of the proposed development, when combined with all other existing and anticipated development, will not increase the water surface elevation of the base flood more than one foot at any point within the community.
  - (2) Residential Construction. New construction, conversion to, and substantial improvement of any residential structure shall have the lowest floor, including basement, elevated one foot or more above the base flood elevation (BFE). Enclosed areas below the lowest floor shall comply with the flood opening requirements in subsection (15)(A) of this section.
  - (3) Nonresidential Construction. New construction, conversion to, and substantial improvement of any commercial, industrial, or other nonresidential structure shall:

- (a) Have the lowest floor, including basement, elevated one foot or more above the base flood elevation (BFE); or, together with attendant utility and sanitary facilities:
  - (1) Be floodproofed so that below the base flood level the structure is watertight with walls substantially impermeable to the passage of water;
  - (2) Have structural components capable of resisting hydrostatic and hydrodynamic loads and effects of buoyancy;
  - (3) Be certified by a registered professional engineer or architect that the design and methods of construction are in accordance with accepted standards of practice for meeting provisions of this section based on their development and/or review of the structural design, specifications, and plans. Such certifications shall be provided to the Floodplain Administrator as set forth subsection (7) of this section.
- (b) Nonresidential structures that are elevated, not floodproofed, shall comply with the standards for enclosed areas below the lowest floor in subsection (15)(A) of this section.
- (c) Applicants floodproofing nonresidential buildings shall be notified that flood insurance premiums will be based on rates that are one foot below the floodproofed level (e.g., a building floodproofed to the base flood level will be rated as one foot below).

#### (4) Manufactured Dwellings.

- (a) Manufactured dwellings to be placed (new or replacement) or substantially improved that are supported on solid foundation walls shall be constructed with flood openings that comply with subsection (15)(A) of this section;
- (b) The bottom of the longitudinal chassis frame beam shall be at or above base flood elevation;
- (c) Manufactured dwellings to be placed (new or replacement) or substantially improved shall be anchored to prevent flotation, collapse, and lateral movement during the base flood. Anchoring methods may include, but are not limited to, use of over-the-top or frame ties to ground anchors (reference FEMA's "Manufactured Home Installation in Flood Hazard Areas" guidebook for additional techniques); and
- (d) Electrical crossover connections shall be a minimum of 12 inches above base flood elevation (BFE).
- (5) Recreational Vehicles. Recreational vehicles placed on sites are required to:
  - (a) Be on the site for fewer than 180 consecutive days; and

- (b) Be fully licensed and ready for highway use, on its wheels or jacking system, is attached to the site only by quick disconnect type utilities and security devices, and has no permanently attached additions; or
- (c) Meet the requirements of subsection (15)(C)(4) of this section, including the anchoring and elevation requirements for manufactured dwellings.
- (6) Appurtenant (Accessory) Structures. Relief from elevation or floodproofing requirements for residential and nonresidential structures in riverine (noncoastal) flood zones may be granted for appurtenant structures that meet the following requirements:
  - (a) Appurtenant structures located partially or entirely within the floodway must comply with requirements for development within a floodway found in subsection (16) of this section;
  - (b) Appurtenant structures must only be used for parking, access, and/or storage and shall not be used for human habitation;
  - (c) In compliance with State of Oregon Specialty Codes, appurtenant structures on properties that are zoned residential are limited to one- story structures less than 200 square feet, or 400 square feet if the property is greater than two acres in area and the proposed appurtenant structure will be located a minimum of 20 feet from all property lines. Appurtenant structures on properties that are zoned as nonresidential are limited in size to 120 square feet;
  - (d) The portions of the appurtenant structure located below the base flood elevation must be built using flood resistant materials;
  - (e) The appurtenant structure must be adequately anchored to prevent flotation, collapse, and lateral movement of the structure resulting from hydrodynamic and hydrostatic loads, including the effects of buoyancy, during conditions of the base flood;
  - (f) The appurtenant structure must be designed and constructed to equalize hydrostatic flood forces on exterior walls and comply with the requirements for flood openings in subsection (15)(A) of this section;
  - (g) Appurtenant structures shall be located and constructed to have low damage potential;
  - (h) Appurtenant structures shall not be used to store toxic material, oil, or gasoline, or any priority persistent pollutant identified by the Oregon Department of Environmental Quality unless confined in a tank installed in compliance with subsection (14)(E) of this section;

- (i) Appurtenant structures shall be constructed with electrical, mechanical, and other service facilities located and installed so as to prevent water from entering or accumulating within the components during conditions of the base flood.
- 16. Floodways. Located within the special flood hazard areas established in subsection (3) of this section are areas designated as floodways. Since the floodway is an extremely hazardous area due to the velocity of the floodwaters which carry debris, potential projectiles, and erosion potential, the following provisions apply:
  - A. Prohibit encroachments, including fill, new construction, substantial improvements, and other development within the adopted regulatory floodway unless:
    - (1) Certification by a registered professional civil engineer is provided demonstrating through hydrologic and hydraulic analyses performed in accordance with standard engineering practice that the proposed encroachment shall not result in any increase in flood levels within the community during the occurrence of the base flood discharge; or
    - (2) A community may permit encroachments within the adopted regulatory floodway that would result in an increase in base flood elevations; provided, that a conditional letter of map revision (CLOMR) is applied for and approved by the Federal Insurance Administrator, and the requirements for such revision as established under Volume 44 of the Code of Federal Regulations, Section 65.12, are fulfilled.
  - **B.** If the requirements of subsection (16)(A) of this section are satisfied, all new construction, substantial improvements, and other development shall comply with all other applicable flood hazard reduction provisions of subsection (14) of this section.
- 17. Standards for Shallow Flooding Areas. Shallow flooding areas appear on FIRMs as AO Zones with depth designations or as AH Zones with base flood elevations. For AO Zones the base flood depths range from one to three feet above ground where a clearly defined channel does not exist, or where the path of flooding is unpredictable and where velocity flow may be evident. Such flooding is usually characterized as sheet flow. For both AO and AH Zones, adequate drainage paths are required around structures on slopes to guide floodwaters around and away from proposed structures.
- 18. Standards for AH Zones. Development within AH Zones must comply with the standards in subsections (14), (15), and (17) of this section.
- 19. Standards for AO Zones. In AO Zones, the following provisions apply in addition to the requirements in subsections (14) and (17) of this section:
  - A. New construction, conversion to, and substantial improvement of residential structures and manufactured dwellings within AO Zones shall have the lowest floor, including basement, elevated above the highest grade adjacent to the building, at minimum one foot or more above the depth number specified on the flood insurance rate maps (FIRMs) (at least two

- feet if no depth number is specified). For manufactured dwellings the lowest floor is considered to be the bottom of the longitudinal chassis frame beam.
- **B.** New construction, conversion to, and substantial improvements of nonresidential structures within AO Zones shall either:
  - (1) Have the lowest floor (including basement) elevated above the highest adjacent grade of the building site, at minimum one foot or more above the depth number specified on the flood insurance rate maps (FIRMs) (at least two feet if no depth number is specified); or
  - (2) Together with attendant utility and sanitary facilities, be completely floodproofed to or above the depth number specified on the FIRMs (or a minimum of two feet above the highest adjacent grade if no depth number is specified), so that any space below that level is watertight with walls substantially impermeable to the passage of water and with structural components having the capability of resisting hydrostatic and hydrodynamic loads and the effects of buoyancy. If this method is used, compliance shall be certified by a registered professional engineer or architect as stated in subsection (15)(C)(3)(a)(3) of this section.
- C. Recreational vehicles placed on sites within AO Zones on the community's flood insurance rate maps (FIRMs) shall either:
  - (1) Be on the site for fewer than 180 consecutive days; and
    - (a) Be fully licensed and ready for highway use, on its wheels or jacking system, is attached to the site only by quick disconnect type utilities and security devices, and has no permanently attached additions; or
    - (b) Meet the elevation requirements of subsection (19)(A) of this section, and the anchoring and other requirements for manufactured dwellings of subsection (15)(C)(4) of this section.
- **D.** In AO Zones, new and substantially improved appurtenant structures must comply with the standards in subsection (15)(C)(6) of this section.
- E. In AO Zones, enclosed areas beneath elevated structures shall comply with the requirements in subsection (15)(A) of this section.